

OKI Semiconductor

1A

MSM27C201CZ

262,144-Word x 8-Bit One Time PROM



DESCRIPTION

The MSM27C201CZ is a 2Mbit electrically Programmable Read-Only Memory organized as 262,144 word x 8bit. The MSM27C201CZ operates on a single +5V power supply and is TTL compatible. Since the MSM27C201CZ operates asynchronously, external clocks are not required, making this device easy-to-use. The MSM27C201CZ is suitable as large-capacity fixed memory for microcomputers and data terminals. It is manufactured using a CMOS double silicon gate technology and is offered in 32-pin DIP, 32-pin SOP or 32-pin TSOP packages.

FEATURES


- 262,144 word x 8bit
- Single +5V power supply
- Access time 80ns
- Input / Output TTL compatible
- Three-state output
- Packages
 - 32-pin plastic DIP (DIP32-P-600-2.54)
 - 32-pin plastic SOP (SOP32-P-525-1.27-K)
 - 32-pin plastic TSOP (TSOP I 32-P-814-0.50-K)

PIN CONFIGURATION (TOP VIEW)

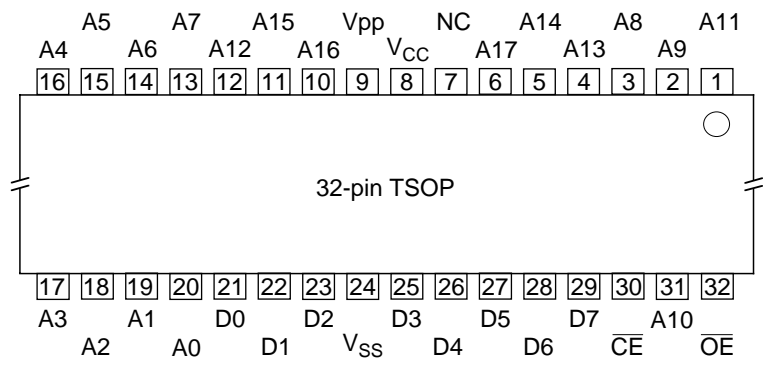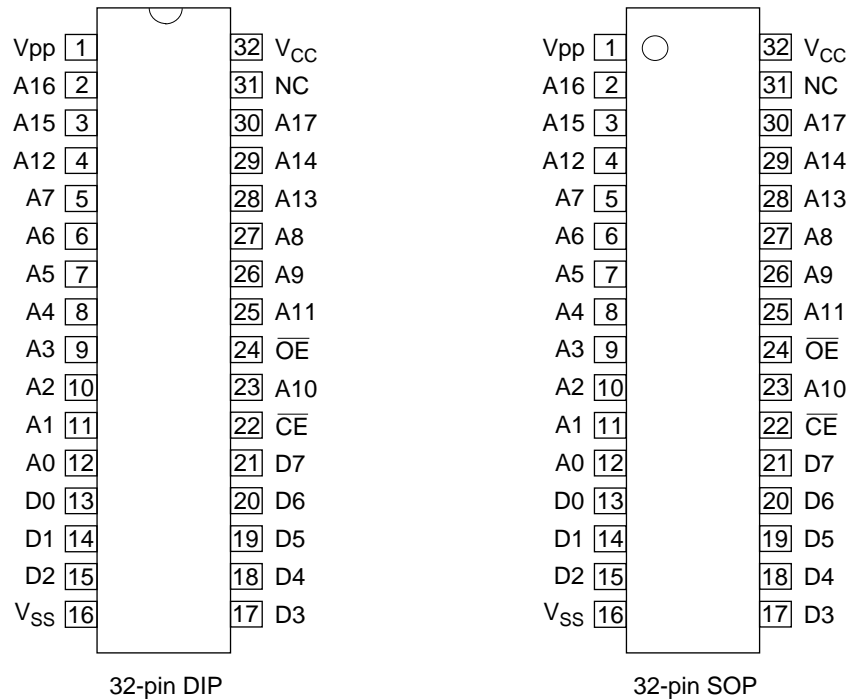

| PIN NAMES | FUNCTIONS |
|-----------------|------------------------------|
| A0 - A17 | Address input |
| D0 - D7 | Data output |
| \overline{CE} | Chip enable |
| \overline{OE} | Output enable |
| V_{CC} | Power supply voltage |
| V_{SS} | GND |
| V_{PP} | Program Power supply voltage |
| NC | No Connection |

BLOCK DIAGRAM

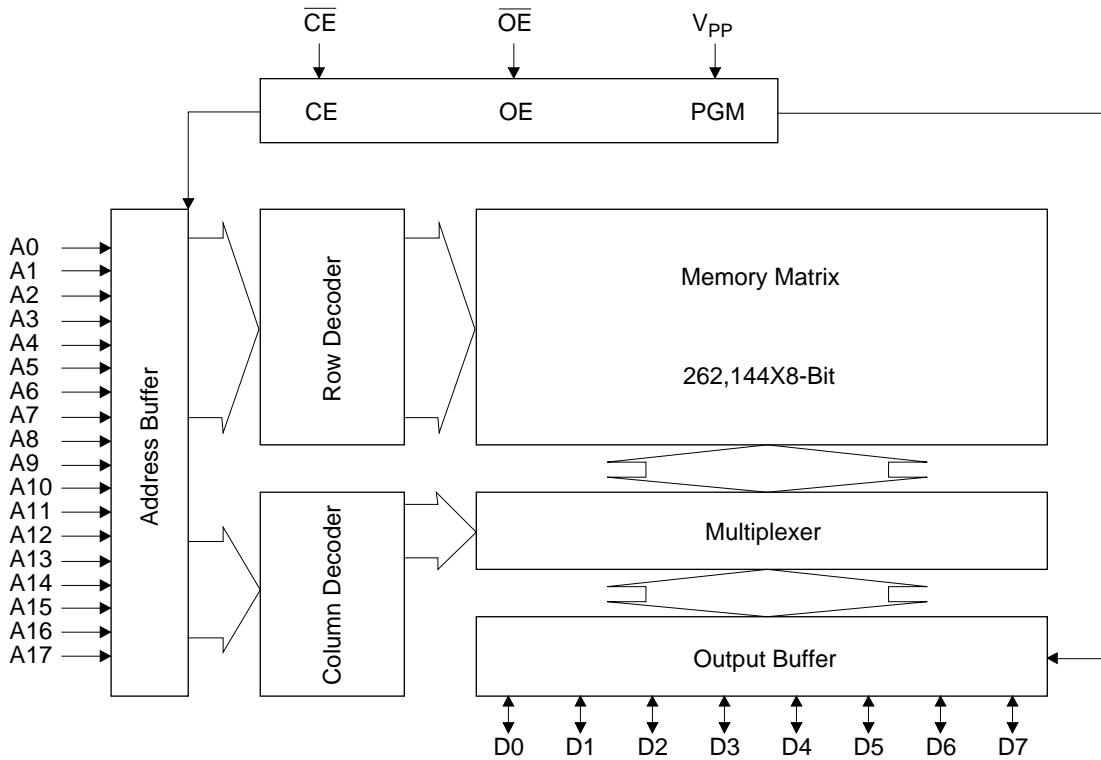

FUNCTION TABLE

| MODE | \overline{CE} | \overline{OE} | V_{PP} | V_{CC} | D0 - D7 |
|-----------------|-----------------|-----------------|----------|----------|-----------|
| READ | L | L | ** | 5.0V | D_{OUT} |
| OUTPUT DISABLE | L | H | | | Hi-Z |
| STAND-BY | H | * | | | Hi-Z |
| PROGRAM | L | H | 11.5V | 6.25V | D_{IN} |
| PROGRAM INHIBIT | H | H | | | Hi-Z |
| PROGRAM VERIFY | H | L | | | D_{OUT} |

* : Don't Care (H or L)

** : Don't Care (H or L or Open)

ABSOLUTE MAXIMUM RATINGS

| Parameter | Symbol | Condition | Value | Unit |
|----------------------------------|-----------|----------------------|------------------------|------|
| Operating temperature under bias | T_{opr} | - | 0 to 70 | °C |
| Storage temperature | T_{stg} | - | -55 to 125 | °C |
| Input voltage | V_I | relative to V_{SS} | -0.5 to $V_{CC} + 0.5$ | V |
| Output voltage | V_O | | -0.5 to $V_{CC} + 0.5$ | V |
| Power supply voltage | V_{CC} | | -0.5 to 7 | V |
| Program power supply voltage | V_{PP} | | -0.5 to 12.5 | V |
| Power dissipation per package | P_D | - | 1.0 | W |

RECOMMENDED OPERATING CONDITIONS FOR READ

(Ta=0 to 70°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-------------------------------|----------|------------------------|------|------|--------------|------|
| V_{CC} power supply voltage | V_{CC} | $V_{CC}=4.75V - 5.25V$ | 4.75 | - | 5.25 | V |
| V_{PP} power supply voltage | V_{PP} | | -0.5 | - | $V_{CC}+0.5$ | V |
| Input "H" level | V_{IH} | | 2.2 | - | $V_{CC}+0.5$ | V |
| Input "L" level | V_{IL} | | -0.5 | - | 0.6 | V |

Voltage is relative to V_{SS}

ELECTRICAL CHARACTERISTICS (Read operation)

DC Characteristics

($V_{CC}=5V\pm 0.25V$, $T_a=0$ to $70^\circ C$)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|---|-----------|---|------|------|--------------|---------|
| Input leakage current | I_{LI} | $V_I=0$ to V_{CC} | - | - | 10 | μA |
| Output leakage current | I_{LO} | $V_O=0$ to V_{CC} | - | - | 10 | μA |
| V_{CC} power supply current (Standby) | I_{CS1} | $\overline{CE}=V_{CC}$ | - | - | 50 | μA |
| | I_{CS2} | $\overline{CE}=V_{IH}$ | - | - | 1 | mA |
| V_{CC} power supply current (Read) | I_{CCA} | $\overline{CE}=V_{IL}$, $\overline{OE}=V_{IH}$ $t_c=80ns$ | - | - | 35 | mA |
| V_{PP} power supply current | I_{PP} | $V_{PP}=V_{CC}$ | - | - | 10 | μA |
| Input "H" level | V_{IH} | - | 2.2 | - | $V_{CC}+0.5$ | V |
| Input "L" level | V_{IL} | - | -0.5 | - | 0.8 | V |
| Output "H" level | V_{OH} | $I_{OH}=-400\mu A$ | 2.4 | - | - | V |
| Output "L" level | V_{OL} | $I_{OL}=2.1mA$ | - | - | 0.45 | V |

Voltage is relative to V_{SS}


AC Characteristics

($V_{CC}=5V\pm 0.25V$, $T_a=0$ to $70^\circ C$)


| Parameter | Symbol | Condition | Min. | Max. | Unit |
|-----------------------------|-----------|--------------------------------------|------|------|------|
| Access cycle time | T_C | - | 80 | - | ns |
| Address access time | T_{ACC} | $\overline{CE}=\overline{OE}=V_{IL}$ | - | 80 | ns |
| \overline{CE} access time | T_{CE} | $\overline{OE}=V_{IL}$ | - | 80 | ns |
| \overline{OE} access time | T_{OE} | $\overline{CE}=V_{IL}$ | - | 50 | ns |
| Output disable time | T_{CHZ} | $\overline{OE}=V_{IL}$ | 0 | 40 | ns |
| | T_{OHZ} | $\overline{CE}=V_{IL}$ | 0 | 35 | ns |
| Output hold time | T_{OH} | $\overline{CE}=\overline{OE}=V_{IL}$ | 0 | - | ns |

Measurement conditions

| | | |
|-------------------------------|-------|-------------------|
| Input signal level | ----- | 0V/3V |
| Input timing reference level | ----- | 0.8V/2.0V |
| Output load | ----- | 1TTL gate + 100pF |
| Output timing reference level | ----- | 0.8V/2.0V |

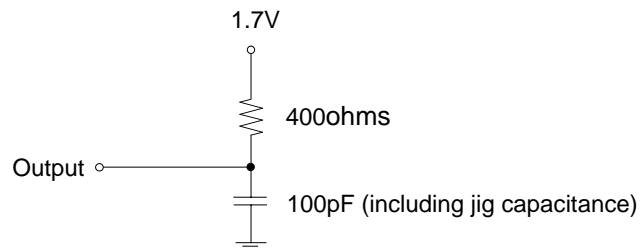

TIMING CHART (READ CYCLE)

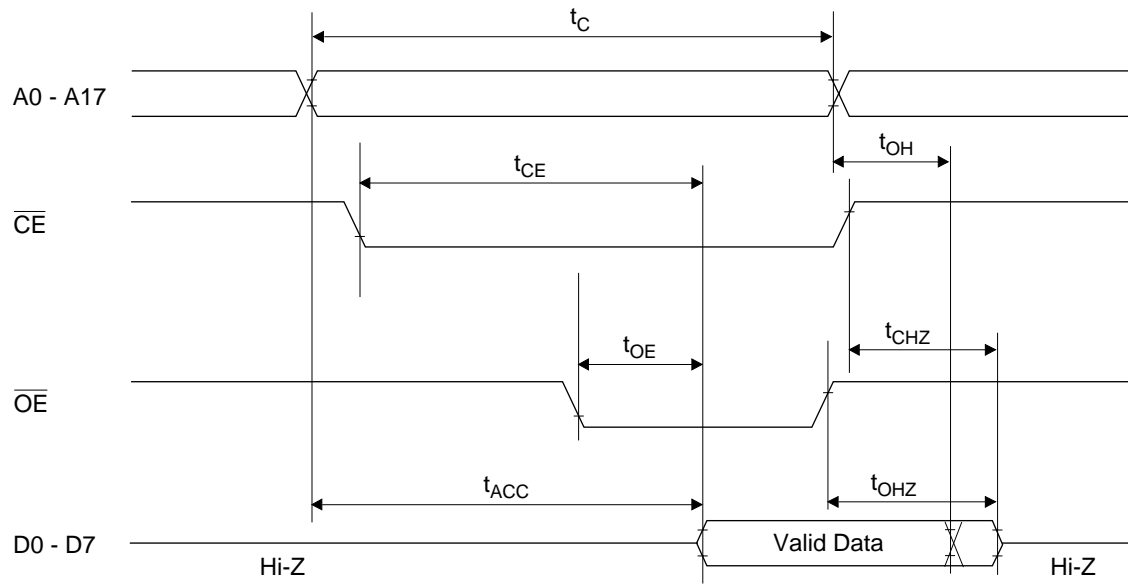

ELECTRICAL CHARACTERISTICS (Programming operation)**DC Characteristics**


(Ta=25°C±5°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|--|------------------|---------------------------------------|-------|------|----------------------|------|
| Input leakage current | I _{LI} | V _I =V _{CC} +0.5V | - | - | 10 | μA |
| V _{PP} power supply current (Program) | I _{PP2} | $\overline{CE}=V_{IL}$ | - | - | 50 | mA |
| V _{CC} power supply current | I _{CC} | - | - | - | 80 | mA |
| Input "H" level | V _{IH} | - | 2.2 | - | V _{CC} +0.5 | V |
| Input "L" level | V _{IL} | - | -0.5 | - | 0.8 | V |
| Output "H" level | V _{OH} | I _{OH} =-400μA | 2.4 | - | - | V |
| Output "L" level | V _{OL} | I _{OL} =2.1mA | - | - | 0.45 | V |
| Program voltage | V _{PP} | - | 11.25 | 11.5 | 11.75 | V |
| V _{CC} power supply voltage | V _{CC} | - | 6.0 | 6.25 | 6.5 | V |

Voltage is relative to V_{SS}**AC Characteristics**(V_{CC}=6.25V±0.25V, V_{pp}=11.5V±0.25V, Ta=25°C±5°C)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|---|------------------|-----------|------|------|------|------|
| Address set-up time | T _{AS} | - | 2 | - | - | μs |
| \overline{OE} set-up time | T _{OES} | - | 2 | - | - | μs |
| Data set-up time | T _{DS} | - | 2 | - | - | μs |
| Address hold time | T _{AH} | - | 0 | - | - | μs |
| Data hold time | T _{DH} | - | 2 | - | - | μs |
| Output float delay from \overline{OE} | T _{DFP} | - | 0 | - | 130 | ns |
| V _{PP} voltage set-up time | T _{VS} | - | 2 | - | - | μs |
| Program pulse width | T _{PW} | - | 23 | 25 | 27 | μs |
| Data valid from \overline{OE} | T _{OE} | - | - | - | 150 | ns |

Programming Waveform

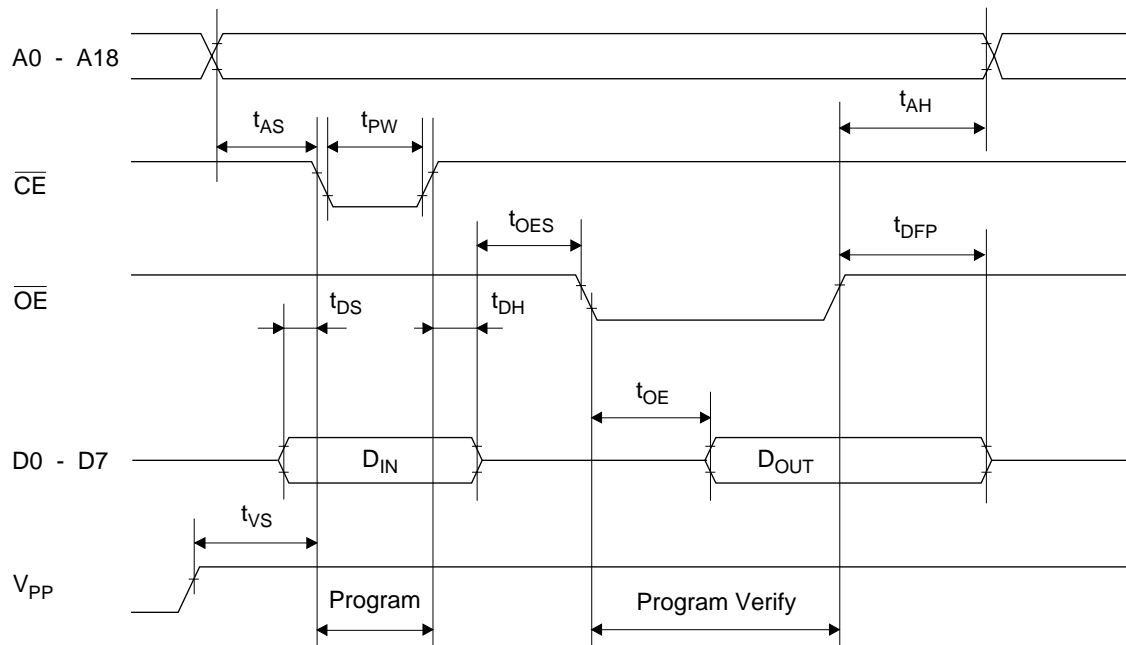


PIN Capacitance


($V_{CC}=5V$, $T_a=25^{\circ}C$, $f=1MHz$)

| Parameter | Symbol | Condition | Min. | Typ. | Max. | Unit |
|-----------|-----------|-----------|------|------|------|------|
| Input | C_{IN} | $V_I=0V$ | - | - | 12 | pF |
| Output | C_{OUT} | $V_O=0V$ | - | - | 15 | |

High Speed Programming Algorithm (I)

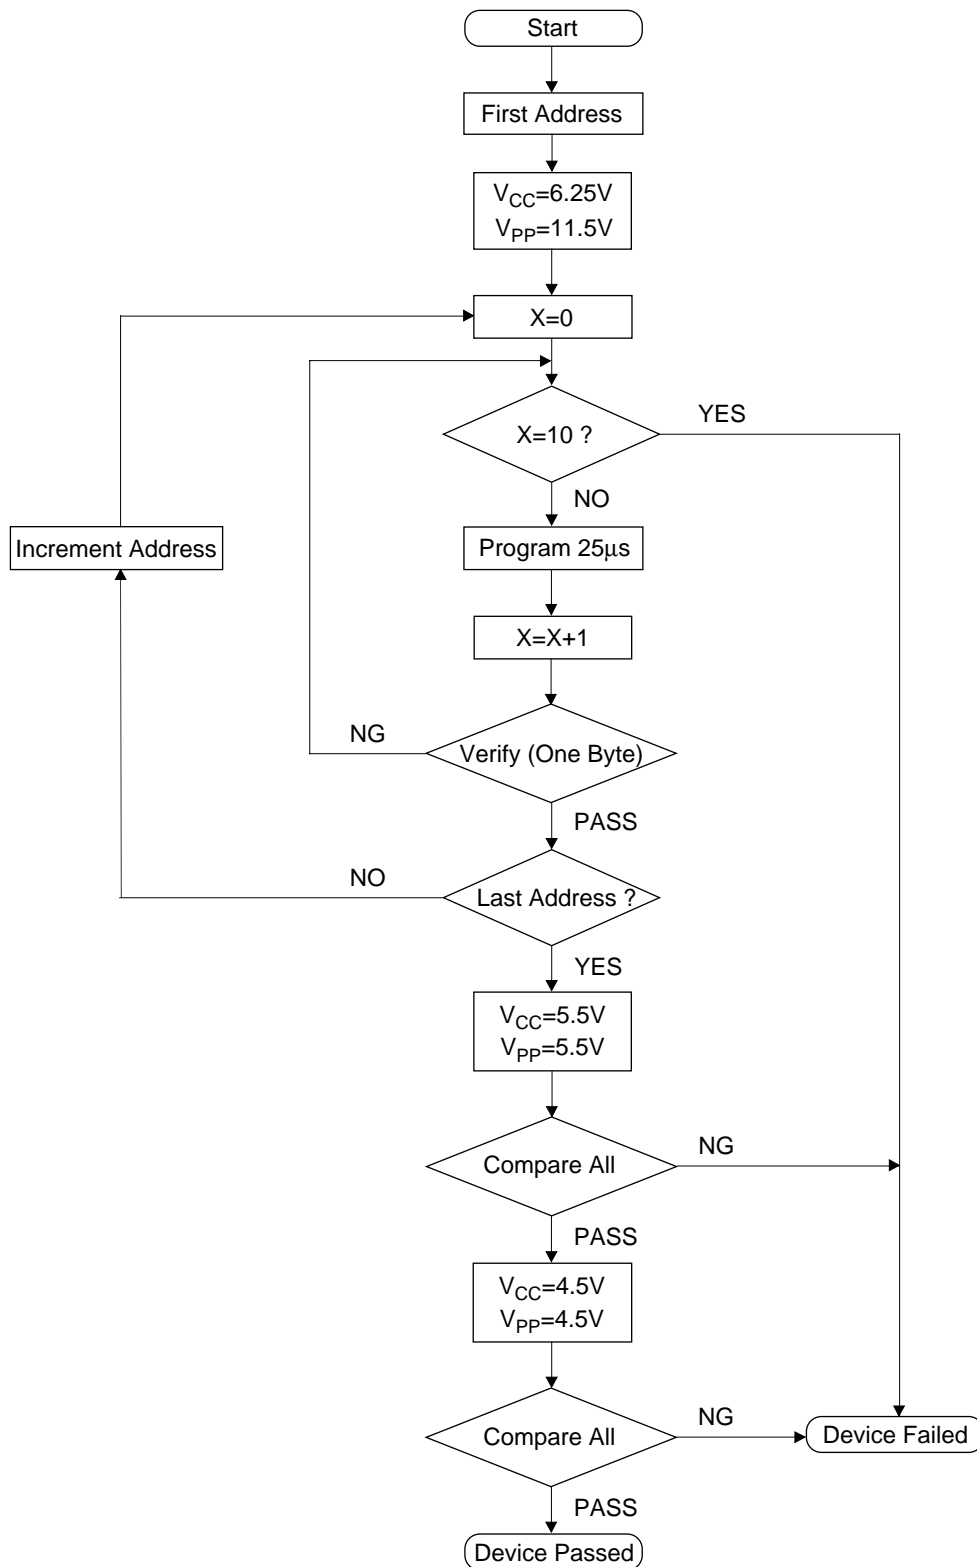

High Speed Programming Algorithm (II)

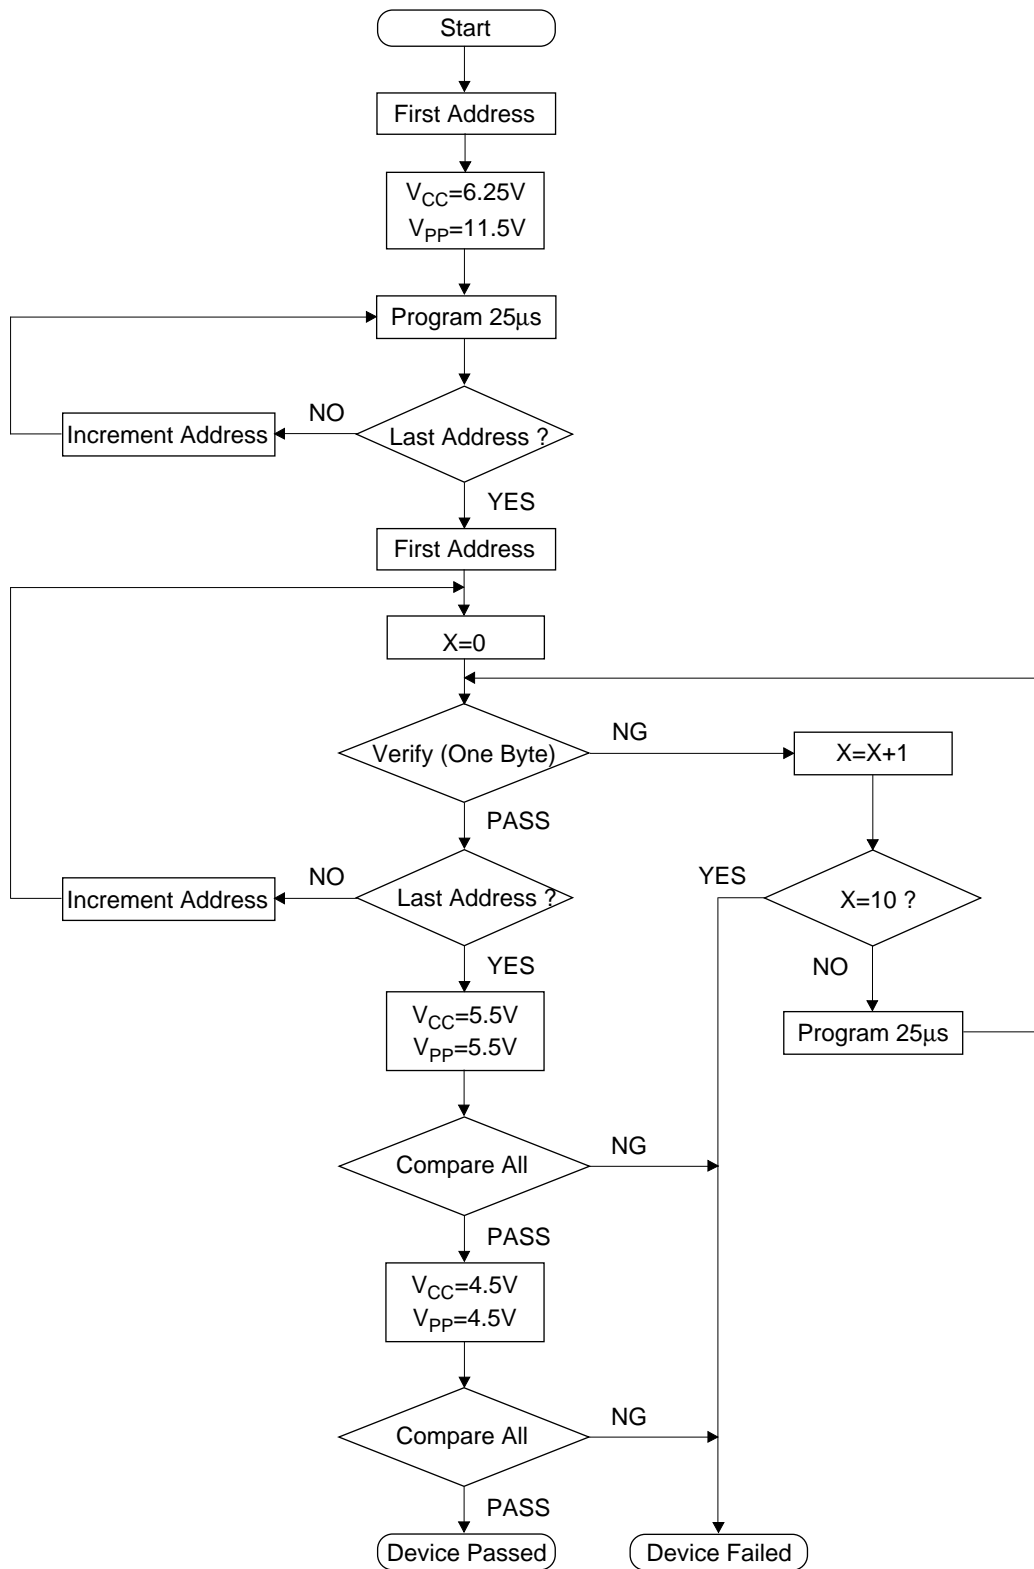

NOTICE

The information contained herein can change without notice owing to product and/or technical improvements. Before using the product, please make sure that the information being referred to is up-to-date.

The outline of action and examples for application circuits described herein have been chosen as an explanation for the standard action and performance of the product. When planning to use the product, please ensure that the external conditions are reflected in the actual circuit, assembly, and program designs.

When designing your product, please use our product below the specified maximum ratings and within the specified operating ranges including, but not limited to, operating voltage, power dissipation, and operating temperature.

Oki assumes no responsibility or liability whatsoever for any failure or unusual or unexpected operation resulting from misuse, neglect, improper installation, repair, alteration or accident, improper handling, or unusual physical or electrical stress including, but not limited to, exposure to parameters beyond the specified maximum ratings or operation outside the specified operating range.

Neither indemnity against nor license of a third party's industrial and intellectual property right, etc. is granted by us in connection with the use of the product and/or the information and drawings contained herein. No responsibility is assumed by us for any infringement of a third party's right which may result from the use thereof.

The products listed in this document are intended for use in general electronics equipment for commercial applications (e.g., office automation, communication equipment, measurement equipment, consumer electronics, etc.). These products are not authorized for use in any system or application that requires special or enhanced quality and reliability characteristics nor in any system or application where the failure of such system or application may result in the loss or damage of property, or death or injury to humans. Such applications include, but are not limited to, traffic and automotive equipment, safety devices, aerospace equipment, nuclear power control, medical equipment, and life-support systems.

Certain products in this document may need government approval before they can be exported to particular countries. The purchaser assumes the responsibility of determining the legality of export of these products and will take appropriate and necessary steps at their own expense for these.

No part of the contents contained herein may be reprinted or reproduced without our prior permission.

All brand, company and product names are the trademarks or registered trademarks of their respective owners.

Copyright 1999 Oki Electric Industry Co., Ltd.

ADDRESSES & SEMICONDUCTOR WEB SITES

OKI Electric Industry Co., Ltd.,

Device Business Group,
10-3, Shibaura, 4-chome,
Minato-ku, Tokyo 108, Japan,
Tel.: +81-(0)3-5445-6327,
Fax.: +81-(0)3-5445-6328,
<http://www.oki.co.jp/semi/>

OKI Semiconductor Group.

785 North Mary Avenue,
Sunnyvale, CA 94086, U.S.A.,
Tel.: +1-408-720-1900,
Fax.: +1-408-720-1918,
<http://www.okisemi.com/>

OKI Electric Europe GmbH,

Head Office Europe,
Hellersbergstrasse 2,
D-41460 Neuss, Germany,
Tel: +49-2131-15960,
Fax: +49-2131-103539,
<http://www.oki-europe.de/>

OKI Electronics (Hong Kong) Ltd.,

Suite 1901-1&19, Tower 3,
China Hong Kong City,
33 Canton Road, Tsimshatsui,
Kowloon, Hong Kong,
Tel.: +852-2-736-2336,
Fax.: +852-2-736-2395

OKI Semiconductor (Asia) Pte. Ltd.,

78 Shenton Way 09-01,
Singapore 0207,
Tel.: +65-221-3722,
Fax.: +65-323-5376

Far Eastern Electric Industry Co., Ltd.,

7th Fl. No.260, Tun Hwa North Road,
Taipei, Taiwan, R.O.C.,
Sumitomo-Flysun Building,
Tel.: +886-2-2719-2561,
Fax.: +886-2-2715-2892
<http://www.ost.oki.co.jp/>

For further information, please contact:

OKI
People To People Technology