

OKI electronic components

OCM2□4, 2□5 SERIES

Low Output-capacitance Type Optical MOS Relay For AC/DC Load

GENERAL DESCRIPTION

The OCM2□4 and OCM2□5 Series are optical MOS relays for AC/DC load that provide high-speed response and are capable of handling high-frequency signals. The input portion is an infrared light emitting diode. The output portion uses a combination of low-capacitance VD-MOS (Vertical Diffusion MOS) FETs and photodiode arrays. The device is encased in an extremely small 6-pin plastic DIP or SMD-type (gull-wing) package.

The optical MOS relay switch may be used in applications that currently use mechanical relay switches, but offers smaller size, noise-free switching, and electronic circuit compatibility because of its non-mechanical operation. Optical MOS relay switches also dissipate less power than equivalent bipolar devices at lower switching frequencies.

FEATURES



- Infinitesimally small control voltage
- Excellent high-frequency characteristics (>30 dB isolation at 10 MHz)
- High-speed switching response of 200 μs or less
- Low leakage current
- No chattering or switch bounces
- No mechanical switching noises
- Small size and easy mounting (6-pin plastic DIP or SMD-type[gull-wing] package)

APPLICATIONS


- Measurement equipment
- Audio-visual equipment
- Home electronics
- Automatic meter reading equipment
- Other applications requiring small size or high performance
- Other applications requiring non-contact switches

PIN CONFIGURATION


(Unit: mm)

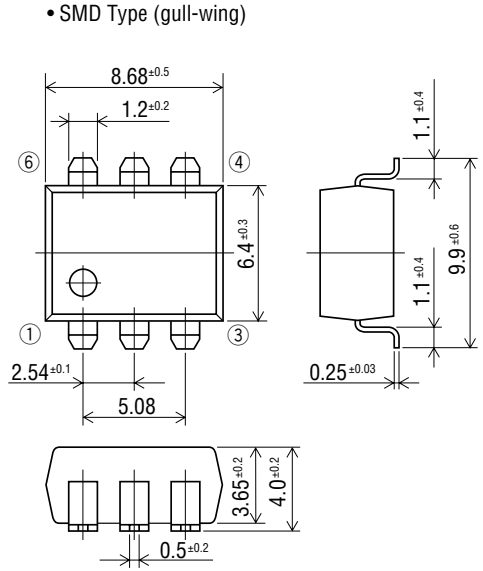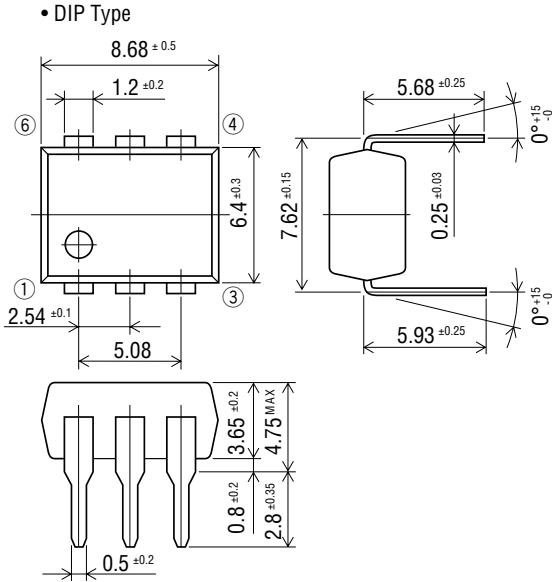


• Through hole (Bottom view)



• Mounting pad (Top view)



• Pin Connection Diagram



- 1: Anode (LED)
- 2: Cathode (LED)
- 3: NC
- 4: Drain (MOS FET)
- 5: Source (MOS FET)
- 6: Drain (MOS FET)

ABSOLUTE MAXIMUM RATINGS

(Ambient temperature Ta=25°C)

Product Name				OCM204	OCM214	OCM224	OCM244	
Parameter	Symbol	Condition	Unit	OCM205	OCM215	OCM225	OCM245	
Input Characteristics	Continuous Forward Current	I _F		mA				50
	Derating Factor of Continuous Forward Current	ΔI _F		mA/°C				Refer to [Derating Factor of Continuous Forward Current] of characteristics data
	Peak Forward Current	I _{FM}	Pulse width 100 μs Cycle 10 ms	A				0.5
	Reverse Voltage	V _R		V				5
	Power Dissipation	P _{DL}		mW				75
Output Characteristics	Load Voltage	V _{OFF}		V				60 100 200 400
	Load Current	I _{ON}		mA				80 50 40 15
	Derating Factor of Load Current	ΔI _{ON}		mA/°C				Refer to [Derating Factor of Load Current] of characteristics data
	Surge Load Current	I _{SUG}	Pulse width 1 ms 1shot	A		0.1	0.07	0.025
	Power Dissipation	P _D		mW				300
Total Power Dissipation			P _{tot}	mW				325
Isolation Voltage	V _{IO}		V(rms)	1500				
				OCM204	OCM214	OCM224	OCM244	
				4000				
				OCM205	OCM215	OCM225	OCM245	
Operating Temperature	T _{opr}		°C				-40 to +85	
Storage Temperature	T _{stg}		°C				-40 to +100	

ELECTRICAL CHARACTERISTICS


(Ambient temperature Ta=25°C)

Product Name					OCM204	OCM214	OCM224	OCM244				
Parameter	Symbol	Condition		Unit	OCM205	OCM215	OCM225	OCM245				
Input Characteristics	Forward Voltage	V_F	$I_F=10\text{ mA}$	Min.	1.0							
				Max.					1.3			
	Reverse Voltage	I_R	$V_R=5\text{ V}$	Max.	μA	10						
	Operation Input Current *1	I_{FA}	$I_{ON}=100\text{ mA}$	Max.	mA	5						
Recovery Input Current	I_{FR}	$V_{OFF}=\text{Rating}$ $I_{ON}=100\text{ mA}$	Min.	mA	0.2							
Output Characteristics	On-resistance	R_{ON}	$I_F=10\text{ mA}$ $I_{ON}=\text{Rating}$ <small>Time to flow current is within one second</small>	Min.	20 40 100 300							
				Typ.					30 65 150 600			
				Max.								
Off-state Leakage Current*2	I_{OFF}	$V_{OFF}=\text{Rating}$	Max.	nA	1.0							
Output Terminal Capacitance	C_{OUT}	$V_{OFF}=50\text{ V}$ $f=1\text{ MHz}$	Typ.	pF	7							
Input-to-output Capacitance	C_{IO}	$f=1\text{ MHz}$	Typ.	pF	1.3							
Coupling Characteristics	Turn-on Time	t_{ON}	$I_F=10\text{ mA}$ $I_{ON}=\text{Rating}$	Typ.	30							
				Max.					200			
	Turn-off Time	t_{OFF}	$I_F=10\text{ mA}$ $I_{ON}=\text{Rating}$ OCM204, 205: 10mA OCM214, 215: 10mA OCM224, 225: 4mA OCM244, 245: 1mA	Typ.	60							
Max.				200								


*1 : Can correspond to special specification $I_{FA} < 3.0\text{ mA}$ *2 : Can correspond to special specification $I_{FA} < 0.1\text{ nA}$

TYPICAL CHARACTERISTICS


- Derating Factor of Continuous Forward Current

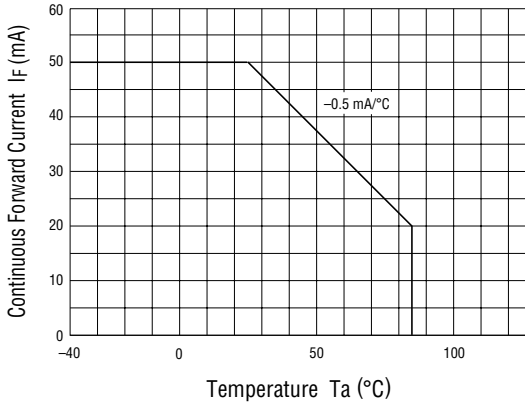


- Derating Factor of Continuous Load Current

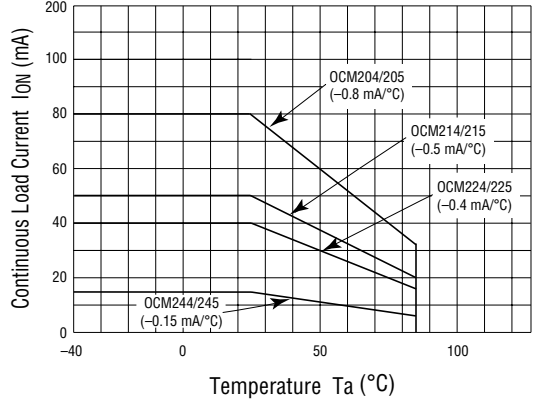


- Operation Input Current vs. Ambient Temperature

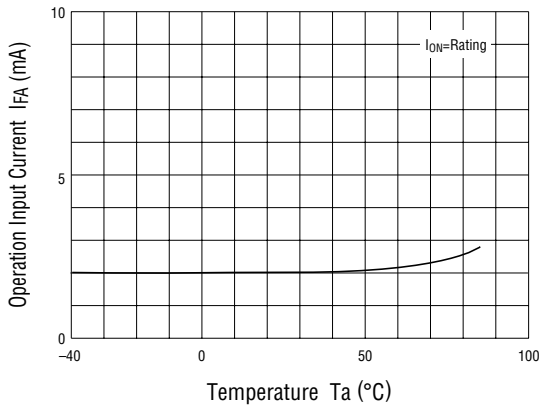


- Recovery Input Current vs. Ambient Temperature

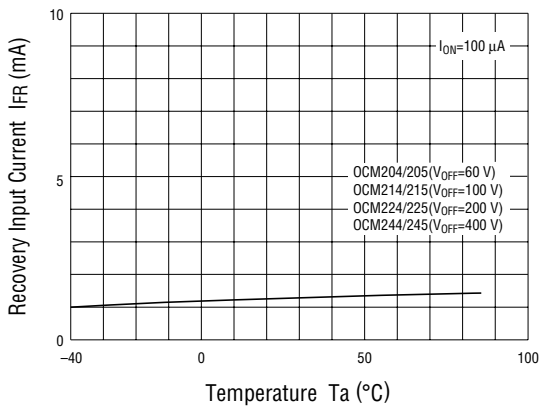


- On-resistance vs. Ambient Temperature 1

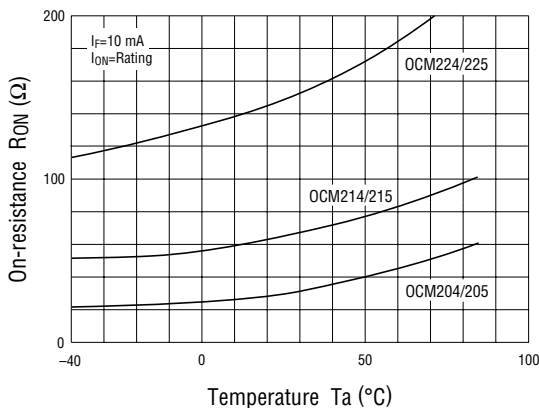


- On-resistance vs. Ambient Temperature 2

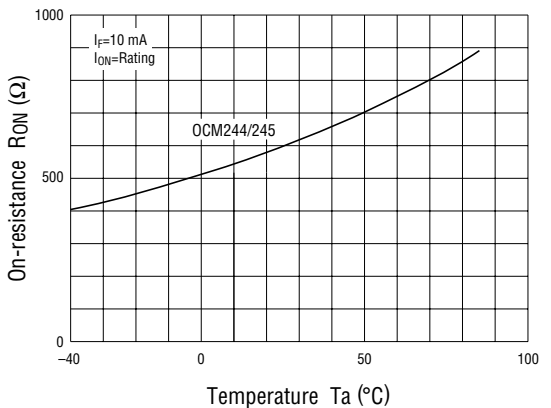


• Turn-on/Turn-off Time vs. Ambient Temperature

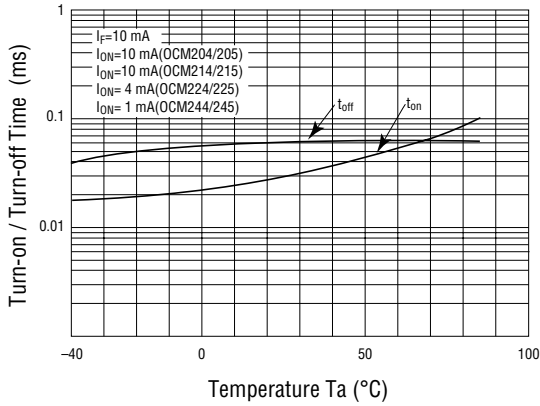


• Off-state Leakage Current vs. Ambient Temperature

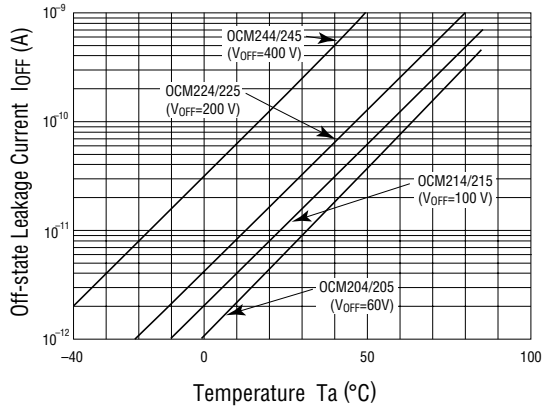


• Continuous Foward Current vs. On-resistance 1

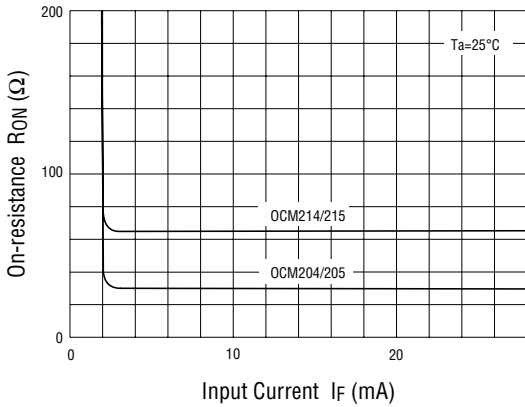


• Continuous Foward Current vs. On-resistance 2

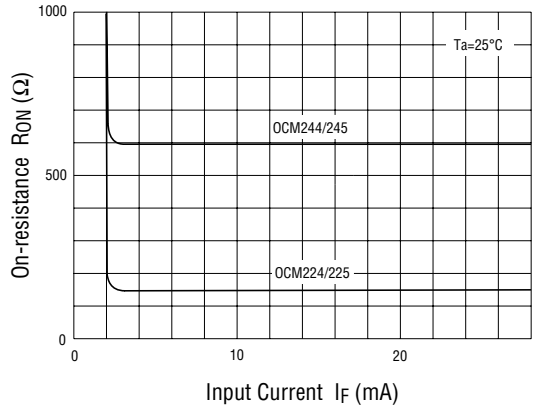


• Continuous Foward Current vs. Turn-on/Turn-off Time

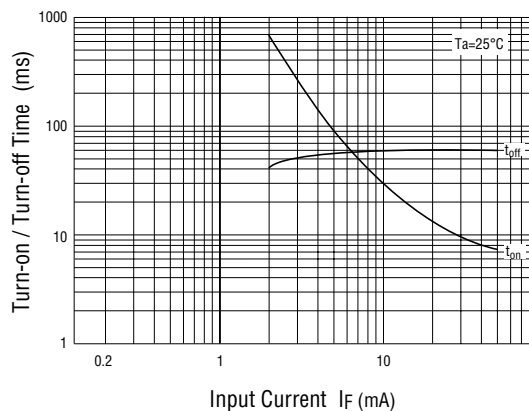


• Output Terminal Capacitance vs. Applied Voltage

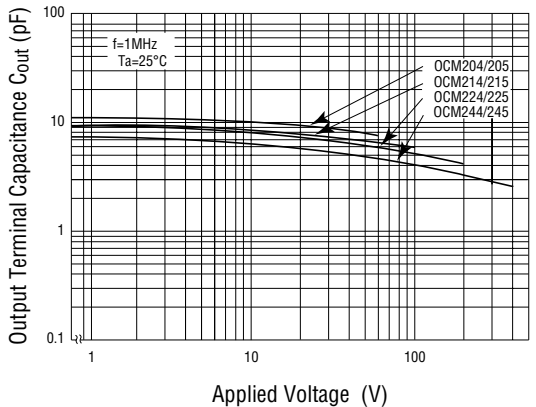

• Isolation

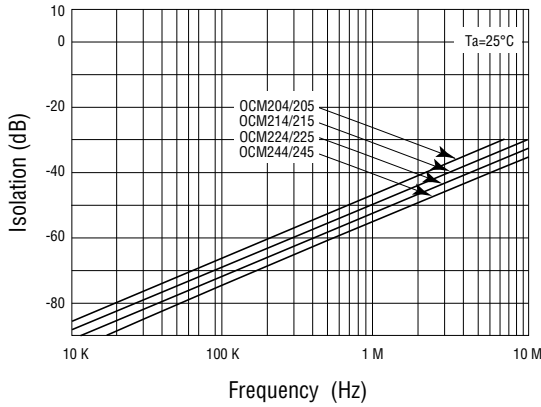

• Insertion Loss

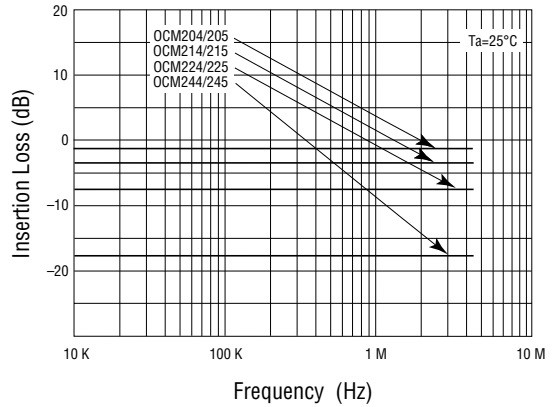

• Load Current vs. Voltage

