

IMU

6DOF INERTIAL MEASUREMENT UNIT

- ▼ High Stability MEMS Sensors
- ▼ Gyro and Accel Range Options
- ▼ Analog and Digital Outputs
- ▼ No Calibration Required
- ▼ EMI & Vibration Resistant

Applications

- ▼ Navigation and Control
- ▼ Marine Dynamics
- ▼ Vehicle Testing



IMU400CC

The IMU400CC is a high performance solid-state six-degree-of-freedom (6DOF) Inertial Package intended for OEM Navigation and Control, dynamics testing and instrumentation applications. This high reliability strap-down inertial system provides accurate measurement of angular rate and linear acceleration.



The IMU400CC series product builds on the performance of the IMU400CB series. It features higher performance sensors, including new silicon MEMS gyroscopes with wider bandwidth and improved bias stability. New design features in the IMU400CC series reduce sensitivity to vibration and EMI.

The IMU400CC achieves its excellent performance by employing proprietary algorithms to characterize and correct

for the effects of temperature, linearity and misalignment. Fully compensated angular rate and acceleration outputs are provided in both analog and digital (RS-232) formats.

Crossbow continues to manufacture the IMU300 series, although it recommends the IMU400 for most applications. Contact Crossbow for more information on the IMU300.


Each Inertial System comes with a User's Manual offering helpful hints on programming, installation, and product information. In addition, Crossbow's GYRO-VIEW software is included to assist you in system development and evaluation, and allows you to perform data acquisition.

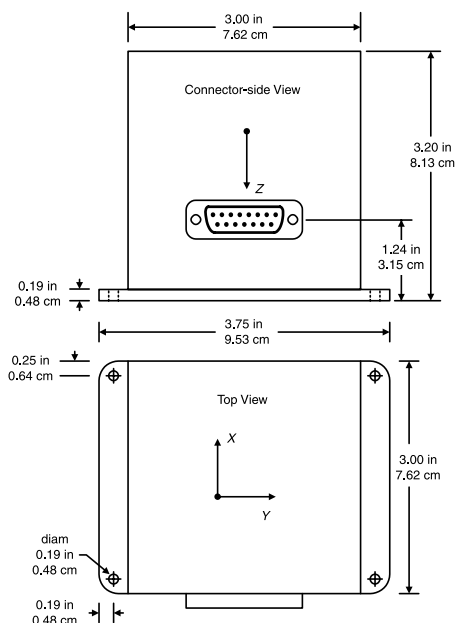

Specifications	IMU400CC-100	IMU400CC-200	Remarks
Performance			
Update Rate (Hz)	> 100	> 100	Continuous Update Mode
Start-up Time Valid data (sec)	< 1	< 1	
Angular Rate			
Range Roll, Pitch, Yaw (°/sec)	± 100	± 200	
Bias: Roll, Pitch, Yaw (°/sec)	<± 1.0	<± 1.0	
Scale Factor Accuracy (%)	< 1	< 1	
Non-Linearity (% FS)	< 0.3	< 0.3	
Resolution (°/sec)	< 0.025	< 0.05	
Bandwidth (Hz)	> 25	> 25	-3 dB point
Random Walk (°/hr ^{1/2})	< 2.25	< 4.5	Typical
Acceleration			
Range X/Y/Z (g)	± 2	± 10	
Bias: X/Y/Z (mg)	<± 8.5	<± 12	
Scale Factor Accuracy (%)	< 1	< 1	
Non-Linearity (% FS)	< 1	< 1	
Resolution (mg)	< 0.25	< 1.25	
Bandwidth (Hz)	> 75	> 75	-3 dB point
Random Walk (m/s/hr ^{1/2})	< 0.1	< 0.5	
Environment			
Operating Temperature (°C)	-40 to +71	-40 to +71	
Non-Operating Temperature (°C)	-55 to +85	-55 to +85	
Non-Operating Vibration (g rms)	6	6	20 Hz - 2 KHz random
Non-Operating Shock (g)	1000	1000	1 ms half sine wave
Electrical			
Input Voltage (VDC)	9 to 30	9 to 30	
Input Current (mA)	< 250	< 250	
Power Consumption (W)	< 3	< 3	at 12 VDC
Digital Output Format	RS-232	RS-232	"See Digital Data Format"
Analog ¹ Range (VDC)	± 4.096	± 4.096	Pins 8, 9, 10, 12, 13, 14
	0 to 5.0	0 to 5.0	Pins 5, 6, 7
Physical			
Size (in)	3.0 x 3.75 x 3.2	3.0 x 3.75 x 3.2	Including mounting flanges
(cm)	7.62 x 9.53 x 8.13	7.62 x 9.53 x 8.13	Including mounting flanges
Weight (lbs)	< 1.4	< 1.4	
(kg)	< 0.64	< 0.64	
Connector	15 pin sub-miniature "D" male		

Notes:

¹All DAC Analog outputs are fully buffered and are designed to interface directly to data acquisition equipment
Specifications subject to change without notice




Pin	Function
1	RS-232 Transmit Data
2	RS-232 Receive Data
3	Input Power
4	Ground
5	X-axis accel voltage ¹
6	Y-axis accel voltage ¹
7	Z-axis accel voltage ¹
8	Roll-axis angular rate ²
9	Pitch-axis angular rate ²
10	Yaw-axis angular rate ²
11	NC – Factory use only
12	X-axis acceleration ³
13	Y-axis acceleration ³
14	Z-axis acceleration ³
15	NC – Factory use only

Notes

- The accelerometer voltage outputs are taken directly from the accelerometers without compensation or scaling.
- The angular rate analog outputs are scaled to represent degrees/second. Outputs are created by a D/A converter.
- Actual output depends on IMU measurement mode.

Pin Diagram

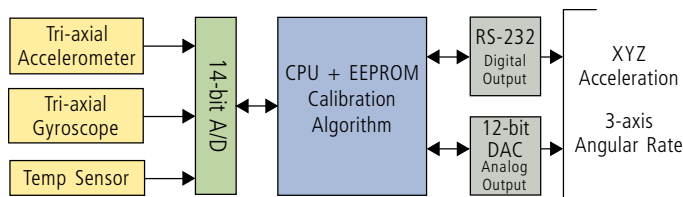

IMU Block Diagram

Ordering Information

Model	Description	Gyro (°/sec)	Accel (g)
IMU400CC-100	High performance 6 DOF IMU	± 100	± 2
IMU400CC-200	High Performance 6 DOF IMU	± 200	± 10

CALL FACTORY FOR OTHER CONFIGURATIONS

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382