

PDCR 4000 Series

High Performance Millivolt Output Pressure Transducers

- $\pm 0.04\%$ accuracy
- ranges from 70mbar to 700bar
- Gauge, absolute & differential
- $\pm 0.1\%$ Stability per annum
- 400% Overpressure
- Hastelloy & stainless wetted parts



PDCR 4000

PDCR 4000 Series

High Performance Millivolt Output Pressure Transducers

The Druck PDCR 4000 Series, a range of high performance millivolt output pressure transducers, is a continuation of a successful family of products started in the early 1970's. This new generation of transducers offers enhanced levels of measurement accuracy, stability and reliability with a flexible specification to meet the varied and demanding needs of today's industrial and OEM users.

At the heart of each transducer are the latest advances in micro-machined silicon diaphragm technology from Druck's own class 100 silicon processing facility. The pressure sensitive silicon element is mounted within a high integrity glass-to-metal seal and is fully isolated from the pressure media by a Hastelloy isolation diaphragm, which is electron beam welded in front of the seal.

Packaged with conditioning electronics into a Hastelloy and Stainless Steel enclosure for optimum corrosion resistance, the PDCR 4000 is compact, rugged and able to operate reliably, even in the most hostile environments.

Large quantities of PDCR 4000 sensor "cores" are produced and held in stock. These are then selected and completed with pressure and electrical connections to meet individual customer requirements. This partially built core concept ensures flexibility of choice, whilst maintaining a short delivery. Additionally, every core is fully tested over its complete pressure and temperature range to ensure one hundred percent compliance.

The high performance PDCR 4000 is ideally suited to meet the demands of a wide range of applications, particularly in harsh operating environments where:

- ☑ accuracy
- ☑ stability
- ☑ reliability
- ☑ overpressure
- ☑ choice of specification

are important selection criteria, together with quick delivery.





Pressure Measurement

Specification

Operating Pressure Ranges

70, 140 mbar gauge
350, 700 mbar, 1, 1.5, 2, 3.5, 5, 7, 10, 15, 20, 35 and 60 bar gauge or absolute
70, 135, 200, 350, 500 and 700 bar sealed gauge or absolute
70, 140, 350, 700 mbar, 1, 1.5, 2, 3.5, 5, 7, 10, 15, 20 and 35 bar differential (maximum line pressure 70 bar)

For lower pressure ranges e.g. 0.1 mbar refer to LP series data sheet.

Other pressure units can be specified e.g. psi, KPa, inH₂O.

All transducers will accurately respond to pressures below atmospheric (negative pressures).

Overpressure

The operating pressure range may be exceeded by the following multiples with negligible effect on calibration.

Gauge and absolute:

10 x for ranges up to 350 mbar
6 x for ranges up to 700 mbar
4 x for ranges up to 60 bar (140 bar max)
2 x for ranges up to 700 bar

Differential (positive side):

10 x for ranges up to 350 mbar
6 x for ranges up to 700 mbar
4 x for ranges up to 20 bar
100 bar for 35 bar range

Differential (negative side):

6 x for ranges up to 350 mbar
4 x for ranges up to 700 mbar
2 x for ranges up to 5 bar
10 bar for 7 bar to 35 bar ranges

This overpressure capability can be further improved by selecting a range higher than required and operating with a lower output.

Pressure Containment

Gauge and differential (positive side):

12 x for ranges up to 350 mbar
8 x for ranges up to 700 mbar
6 x for ranges up to 60 bar (200 bar maximum)

Differential (negative side):

8 x for ranges up to 350 mbar
6 x for ranges up to 700 mbar
4 x for ranges up to 35 bar (15 bar maximum)

Sealed gauge and absolute:

200 bar for ranges up to 60 bar
1400 bar for ranges 70 bar and above

Pressure Media

Fluids compatible with Hastelloy C276 and stainless steel 316L.

Differential negative port: fluids compatible with stainless steel 316L, silicon, pyrex and epoxy.

Excitation Voltage

10 Volts at 5 mA nominal.

For pulse powered operation, the recommended power-on time is 10ms before sample.

Output is ratiometric to supply within the following limits:

1 V to 12 V for ranges up to 60 bar
4.5 V to 12 V for ranges 70 bar and above

Output Voltage

50 mV for 70, 140 and 350 mbar
100 mV for 700 mbar and above

Transducers with ranges up to 60 bar can be over ranged 2 x Full Scale to provide up to 200mV output. Linearity is slightly degraded but stability is improved.

For higher outputs up to 10 V refer to PMP 4000 series datasheet.

Common Mode Voltage

Typically +3.5 V to +9 V with respect to the –ve supply at 10 V excitation.

Output Impedance

2 k Ω nominal.

Load impedance

Greater than 100 k Ω for quoted performance.

Performance Specification

Accuracy

Combined effects of Non-linearity, Hysteresis and Repeatability.

Standard : $\pm 0.08\%$ FS BSL maximum
Option (A) : $\pm 0.04\%$ FS BSL maximum

Higher accuracies can be selected from the core stock database.

Zero Offset & Span Setting

Typical : ± 1.5 mV
Maximum : ± 3 mV

Improved settings are available where interchangeability is critical.

Option (D): ± 1 mV

Stability

$\pm 0.1\%$ FS typically per annum

For ranges up to 350 mbar multiply x 2

Long term stability is improved by using a lower pressure range in the overrange condition at a reduced excitation voltage.

Operating Temperature Range

-20° to +80°C standard

-54 to +125°C available, refer to PDCR 9X2 series datasheet

Temperature Effects

Standard: $\pm 0.3\%$ FS TEB over 0 to 50°C
 $\pm 1.0\%$ FS TEB over -20 to 80°C

For ranges up to 350 mbar multiply x3

Improved Temperature Error Band (TEB) can be selected from the core stock database.

Acceleration Sensitivity

Typically 0.04% FS/g for 350 mbar decreasing to 0.0003% FS/g for ranges above 60 bar, along the sensitive axis.

Mechanical Shock

1000g, 1ms half sine pulse in each of 3 mutually perpendicular axes will not affect performance.

Vibration

Response less than 0.05% FS/g at 30g peak 10Hz to 2kHz, limited by 12 mm double amplitude, (MIL-STD 810C Proc 514.2-2 Curve L)

Physical Specification

Pressure Connection

70 mbar to 60 bar ranges

Male:-	Female:-
G1/8B (60° Int cone)	G1/4
G1/4B (60° Int cone)	1/4"NPT
G1/4B (flat end)	
1/4"NPT	
7/16"UNF	
M14 x 1.5 mm DIN 3863-8	
Depth cone	

Others available on request - refer to Druck

70 bar to 700 bar ranges: G1/4 (Female)

Adaptors available on request - refer to Druck

Weight

120 gms nominal (70 mbar to 60 bar ranges)
170 gms nominal (70 bar to 700 bar ranges)
200 gms nominal for differential types

Electrical Connection

A wide range of cable and connector versions are available. Refer to ordering information and installation drawings overleaf.

Intrinsic Safety

Optional certified Intrinsically Safe for use with barrier systems to EEx ia IIC T4 amb 80°C. Apparatus Cert Ex 94C2539 - type PDCR IS-1703. Refer to option (F).

Options

(A) Improved accuracy $\pm 0.04\%$ FS BSL.

(B) Internal 'R' Cal Facility (ranges up to 60 bar). Connecting an external link results in a positive shift of 80%. (Not available for PDCR 4X2X, PDCR 4X7X).

(C) Mating electrical connector (PDCR 4X6X).

(D) Improved zero and span settings ± 1 mV.

(E) Negative calibration

(F) Intrinsic safety (ranges up to 60 bar).

Accessories

A traceable calibration certificate with performance data and installation notes is supplied as standard.

Calibration Standards

Pressure transducers manufactured by Druck are calibrated against precision pressure calibration equipment which is traceable to international standards.



Continuing development sometimes necessitates specification changes without notice.



PDCR 4000 Series

High Performance Millivolt Output Pressure Transducers

Ordering Information

Please state the following:

- (1) Select model number

PDCR Basic type number	
Code	Pressure reference
40	Gauge, sealed gauge or absolute
41	Differential
Code	Electrical Connection
0	Core (trimmed PCB)
1	6 Core vented cable
2	4 Core PTFE cable
3	6 Core vented depth cable
6	6 Pin bayonet plug
7	Rotatable DIN plug and socket
Code	Calibrated temperature range
0	0 to 50°C
1	-20 to 80°C

PDCR 40 2 1 Typical model number

- (2) Pressure range and units
- (3) Gauge, sealed gauge or absolute
- (4) Pressure connection
- (5) Cable length where applicable
- (6) Options (if required)

Related Products


Druck manufactures a wide range of pressure transducers and transmitters, associated digital indicators, barometers, and a complete range of precision process calibrators and controllers for the field, workshop and laboratory.



Pictured Left to right
 DPI 610 Field Portable Pressure Calibrator
 TRX-II Portable Documenting Process Calibrator
 LPM 9000 Low Pressure Transducer
 DPI 280 Digital Process Indicator

Installation drawings

Dimensions in mm.

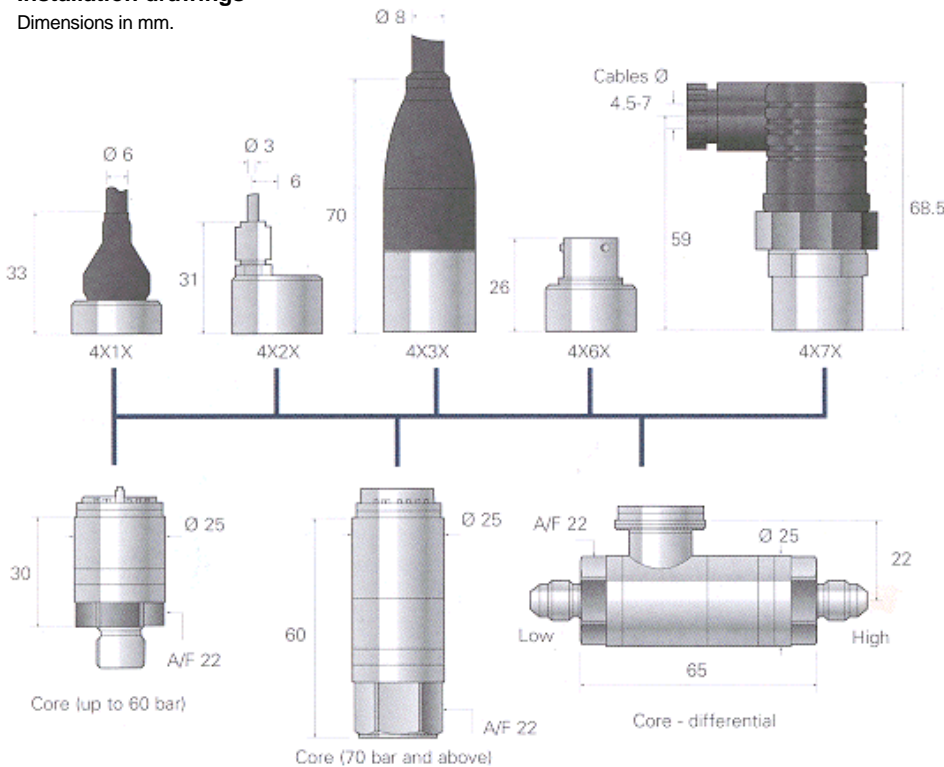

Electrical Connections					
Model Code	Supply		Output		R Cal
	+ve	-ve	+ve	-ve	
PDCR 4X0X upto 60 bar	4	3	5	1	2
PDCR 4X0X upto 700 bar	4	5	3	2	n/a
PDCR 4X1X	Re	Wh	Ye	Bl	Or
PDCR 4X2X	Re	Bl	Ye	Gr	n/a
PDCR 4X3X	Re	Wh	Ye	Bl	Or
PDCR 4X6X	A	D	B	C	E
PDCR 4X7X	1	2	3	E	n/a

Re = Red core
 Wh = White core
 Ye = Yellow core
 Bl = Blue core
 Gr = Green core
 Or = Orange core

Note:
 Screen and black core not connected to transducer bode except PDCR 4X3X



Druck Limited
 Fir Tree Lane, Groby
 Leicester LE6 0FH England
 Tel: +44 (0) 116 231 7100
 Fax: +44(0) 116 231 7103
 E-mail: sales@druck.com
 Internet: www.druck.com

Agent

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382