

**SM5551/SM5552****Low Pressure, Constant Current**
Low Pressure, Constant Voltage

- **LOW PRESSURE TRANSDUCER FULLY TEMPERATURE COMPENSATED AND CALIBRATED**

DESCRIPTION


Pressure sensor models **SM5551** and **SM5552** are fully temperature-compensated and calibrated. Each sensor is housed in a rugged plastic enclosure.

Silicon Microstructures uses a unique silicon sensor chip structure to optimize low-pressure performance and to provide a true low-pressure sensor – not merely a derated high-pressure part. The result is a device that provides the performance necessary for low-pressure applications. Both constant current (model **SM5551**) and constant voltage (model **SM5552**) are available.

Factory calibration provides either a gain-set resistor (model **SM5551**) or a fixed 25mV full-scale output (model **SM5552**). By eliminating the need for customer gain adjustments, these parts are truly interchangeable and offer remarkable assembly-cost savings for a wide variety of OEM industrial, medical, and consumer products.

Rugged pins, sealed into the package to prevent breakage, allow simple placement in PC boards using standard 0.1 inch center-to-center pin spacing. Full high-temperature plastic enclosure prevents substrate drift and eases handling.

Custom pressure ranges available in high-volume applications.

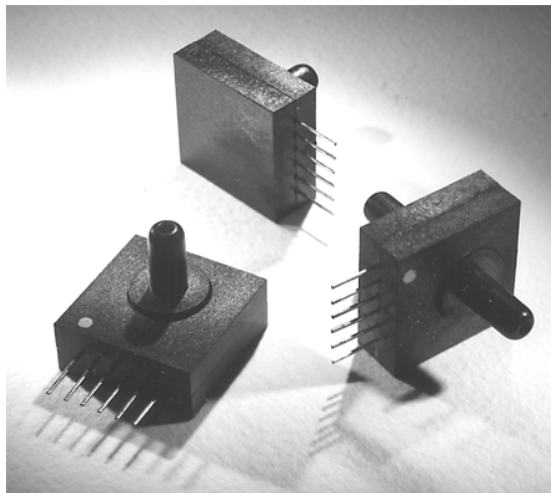**FEATURES**

- Low pressure (from 0-0.15 PSI FS to 0-3.0 PSI FS)
- Differential or Gage Measurement
- Fully-enclosed, rugged plastic housing
- Fully Temperature-compensated
- Thoroughly Calibrated and Interchangeable
- Both Constant Voltage or Constant Current Drive Configuration Available
- Calibrated to Better than 2%

APPLICATIONS

- Medical equipment
- Respiration
- HVAC
- Level detection
- Flow measurement
- Industrial control

SM5551/SM5552


CHARACTERISTICS FOR SM5551/SM5552 - SPECIFICATIONS

Test Conditions: Model SM5551 w/excitation = 1.500mA @ 25 °C, Model SM5552 w/excitation = 10.00Vdc @ 25 °C, unless otherwise specified.


	Min.	Typ.	Max.	Units	Notes
Excitation					
Current (SM5551)	0.00	1.50	3.00	mA	
Voltage (SM5552)	0.00	10.00	20.00	V	
Output					
Span (SM5551)	25.0	45.0	75.0	mV	
Span (SM5552)	24.5	25.0	25.5	mV	1
Offset	-2.00	±0.20	2.00	mV	
Temperature Performance					
TC Span	-1.20	±0.20	1.20	%FS/100°C	2
TC Offset	-2.40	±0.20	2.40	%FS/100°C	2
Temp Hysteresis	-0.30	±0.05	0.30	%FS	3
Accuracy					
Linearity	-0.30	±0.05	0.30	%FS	4
Repeatability	-0.30	±0.05	0.30	%FS	
Pressure Hysteresis	-0.30	±0.05	0.30	%FS	
Sensitivity Matching	-2.00	±0.20	+2.00	%FS	5
Impedance (SM5551)					
Z Input	2.20	3.00	3.80	kΩ	
Z Output	2.90	3.30	3.80	kΩ	
Impedance (SM5552)					
Z Input	4.50	8.00	25.00	kΩ	
Z Output	2.00	2.50	3.80	kΩ	
Temperature Range					
Calibration	0		70	°C	
Operating	-40		125	°C	
Storage	-55		125	°C	
Dynamic Characteristics					
Proof Pressure	10X			FS Pressure	
Burst Pressure	15X			FS Pressure	

Notes:

- For the SM5552, 0.15 PSI range, span is 23.75 (min) to 26.25 (max).
- Measured over a temperature range of 0 to 70 °C. For explanation of RMS error, see application note AN5500.
For 0.15 PSI, TC Span=±3%FS/100 °C; TC Offset=±2.5%FS/100 °C
- For 0.30 PSI, Hysteresis=±0.45%FS;
For 0.15 PSI, Hysteresis=±0.65%FS
- Best fit straight line
For 0.30 PSI, Linearity=±0.5%FS;
For 0.15 PSI, Linearity=±2.5%FS
- Sensitivity matching relates to part-to-part matching
For 0.15 PSI, Sensitivity Matching=5.0%FS



Model SM5551
Constant Current



Model SM5552
Constant Voltage

1 Rs (Span Cal)
2 -Signal Out
3 I excitation
4 Ground
5 +Signal Out*
6 Rs (Span Cal)

1 -Signal Out
2 -Signal Out
3 V excitation
4 Ground
5 +Signal Out*
6 +Signal Out*


*Output increases as top-port pressure is increased

Notice:

Silicon Microstructures, Inc. reserves the right to make changes to the product contained in this publication. Silicon Microstructures, Inc. assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility, however, is assumed for inaccuracies.




Silicon Microstructures, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.

ORDERING INFORMATION:

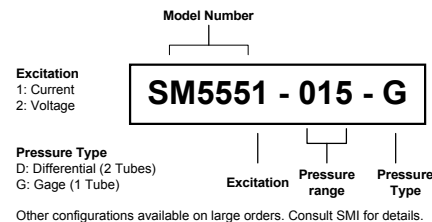

Notes:

- All dimensions are shown in inches
- Tolerance on all dimensions ± 0.005" unless otherwise specified.
- Side view for gage/absolute parts is same as the differential without the bottom port



Pressure Ranges

PSI	5551/ 5552
0.15	001
0.30	003
0.80	008
1.50	015
3.00	030

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382