Silane

SensoriC SiH4 3E 50



FEATURES

Amperometric 3 electrode sensor cell High resolution 0 voltage biased operation fixed organic gel electrolyte

TYPICAL APPLICATIONS

Portable & fixed point applications Semiconductor Industry

PART NUMBER INFORMATION

MINI	0941-031-30009
SENSORIC CLASSIC	0941-031-30069
CTL 4 series adaptation	0941-031-30049
CTL 7 series adaptation	0941-031-30079



TECHNICAL SPECIFICATIONS

Measuring Range $0-50 \text{ ppm SiH}_4$; $0-2 \text{ ppm GeH}_4$ Sensitivity Range $130 \text{ nA/ppm} \pm 70 \text{ nA/ppm}$

Zero Current at 20° C $< \pm 25$ nA Resolution at 20° C < 0.05 ppm Bias Potential 0 mV

Linearity < 10% full scale

Response Time at 20°C

< 10 s calculated from 2 min. exposure time
 < 60 s calculated from 2 min. exposure time

Long Term Sensitivity Drift <5% per 6 months

Operation Conditions

Temperature Range -20°C to +40°C

Humidity Range 20–95% r.H., non–condensing


Effect of Humidity an abrupt change of rel. Humidity will cause a short term drift

in zero reading

Sensor Life Expectancy > 18 months
Warranty 12 months




OUTPUT vs. TEMPERATURE:

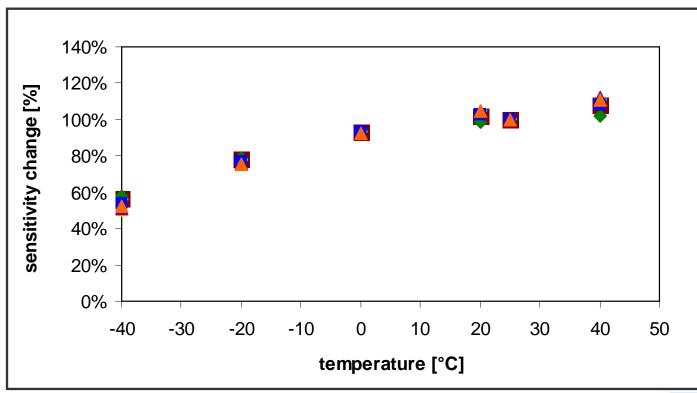



ZERO READING vs. TEMPERATURE:

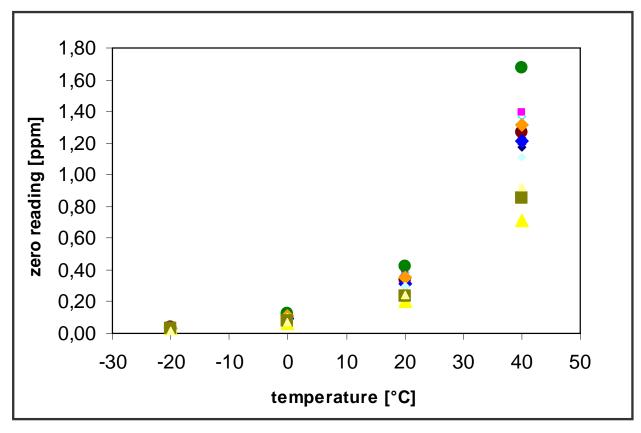



CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Ammonia	100 ppm	0
Arsine	0.2 ppm	0.2
Carbon Dioxide	5000 ppm	0
Carbon Monoxide	100 ppm	0
Chlorine	1 ppm	0
Diborane	0.25 ppm	0.12
Hydrocarbons	% range	0
Hydrochloric Acid	5 ppm	O ¹
Hydrogen	3000 ppm	02
Hydrogen Cyanide	20 ppm	0.5
Hydrogen Sulfide	20 ppm	7
Isopropanol	200 ppm	0
Nitrogen	100 %	0
Phosphine	0.1 ppm	0.13
Sulfur Dioxide	20 ppm	4
Nitrogen Dioxide	10 ppm	-2

- 1) At short gas exposure in minute range (dose ~100ppm min.)
- 2) Interference expected at >4% H2

Notes:

- 1. Interference factors may differ from sensor to sensor and with life time. It is not adviseable to calibrate with interference gases.
- 2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

