




**Datasheet**

**HCA-200M-20K-C**

**High Speed Current Amplifier**

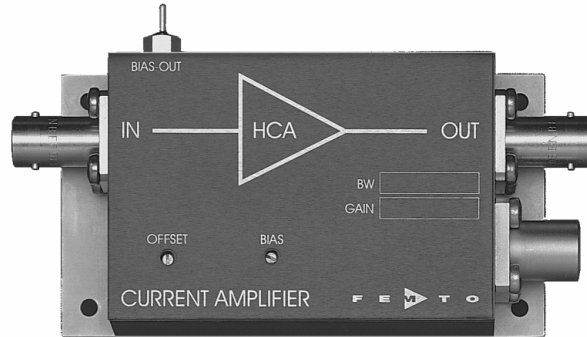

**Features**

- **Bandwidth DC ... 200 MHz**
- **Transimpedance (Gain)  $2 \times 10^4$  V/A**
- **Suitable for Source Capacitance up to 8 pF**
- **Low Equivalent Input Noise Current of  $4.9 \text{ pA}/\sqrt{\text{Hz}}$**

**Applications**

- **Photodiode and Photomultiplier Amplifier**
- **Spectroscopy**
- **Charge Amplifier**
- **Ionisation Detectors**
- **Preamplifier for Lock-Ins, A/D Converters, etc.**

**Specifications**

	<i>Test Conditions</i>	<i>V<sub>s</sub> = ± 15 V, T<sub>a</sub> = 25°C</i>
Gain	Transimpedance	$2 \times 10^4$ V/A (@ 50 Ω load)
	Gain Accuracy	± 2 %
Frequency Response	Lower Cut-Off Frequency	DC
	Upper Cut-Off Frequency (- 3 dB)	200 MHz (± 10 %, @ C <sub>source</sub> 2 to 4 pF)
		170 MHz (± 10 %, @ C <sub>source</sub> 5 to 8 pF)
	Max. Source Capacitance	8 pF (incl. cable, e.g. typical coax cable 1 pF/cm)
	Rise / Fall Time (10 % - 90 %)	1.9 ns (@ C <sub>source</sub> 2 to 4 pF) 2.2 ns (@ C <sub>source</sub> 5 to 8 pF)
	Gain Flatness	± 0.3 dB
Input	Equ. Input Noise Current	$4.9 \text{ pA}/\sqrt{\text{Hz}}$ (@ 10 MHz)
	Equ. Input Noise Voltage	$0.9 \text{ nV}/\sqrt{\text{Hz}}$ (@ 10 MHz)
	Equ. Integrated Noise	1.0 μA peak-peak
	Input Bias Current	12 μA typ.
	Input Bias Current Drift	3 nA / °C
	Offset Current Compensation	± 100 μA adjustable by offset trimpot
	Input Current Range	± 60 μA (for linear amplification)
	Input Offset Voltage	< 1 mV
	DC Input Impedance	56 Ω (virtual) // 5 pF
	Output	Output Voltage Range
Max. Output Voltage Range		± 1.7 V (@ 50 Ω load)
Output Impedance		50 Ω (terminate with 50 Ω load for best performance)
Bias Output	Bias Output Voltage Range	± 12 V, adjustable by bias trimpot
	Bias Output Impedance	10 kΩ // 1 μF

# Datasheet



# HCA-200M-20K-C

## High Speed Current Amplifier

Specifications (continued)		
Power Supply	Supply Voltage	$\pm 15\text{ V}$
	Supply Current	$\pm 50\text{ mA typ.}$ (depends on operating conditions, recommended power supply capability minimum $\pm 150\text{ mA}$ )
Case	Weight	210 g (0.5 lbs)
	Material	AlMg4.5Mn, nickel-plated
Temperature Range	Storage Temperature	$-40 \dots +100\text{ }^\circ\text{C}$
	Operating Temperature	$0 \dots +60\text{ }^\circ\text{C}$

Absolute Maximum Ratings	Input Voltage	$\pm 5\text{ V}$
	Power Supply Voltage	$\pm 22\text{ V}$

Connectors	Input	BNC
	Output	BNC
	Power Supply	LEMO series 1S, 3-pin fixed socket
	Pin 1:	+ 15V
	Pin 2:	- 15V
	Pin 3:	GND

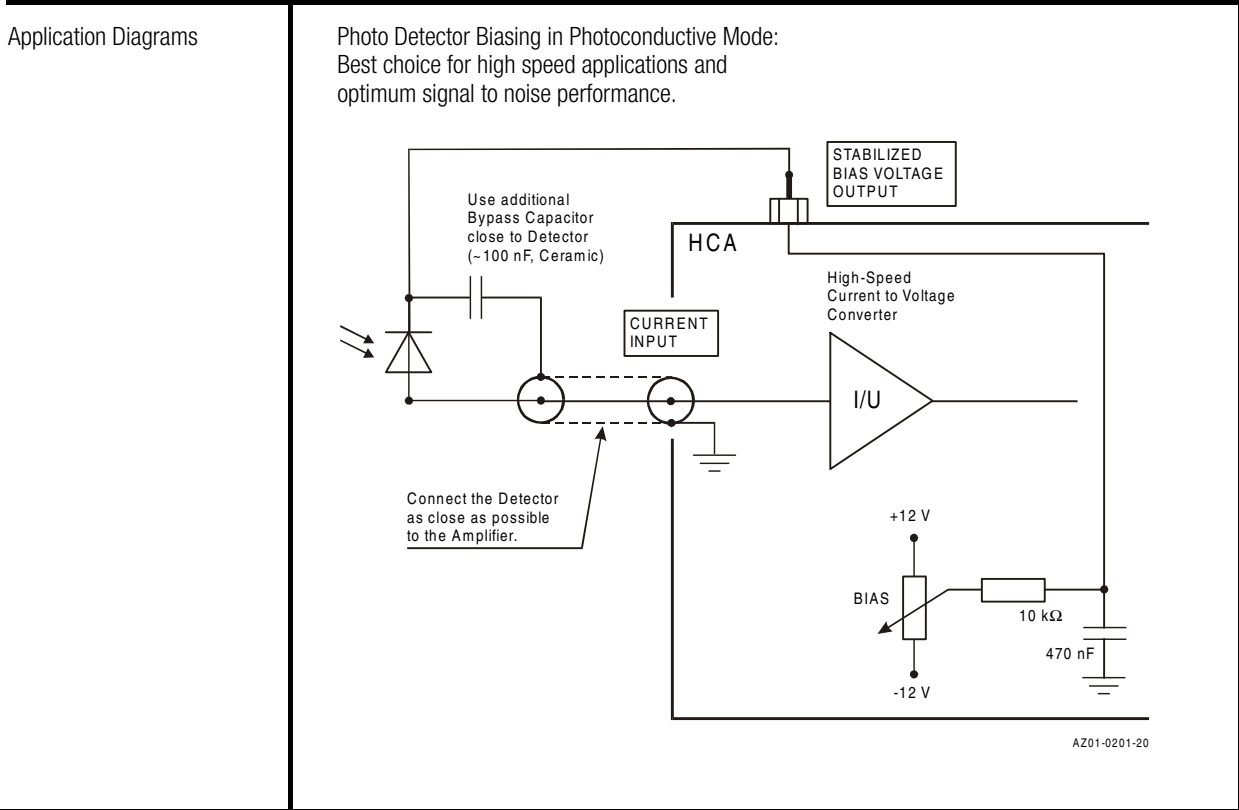

# Datasheet


# HCA-200M-20K-C

## High Speed Current Amplifier

Typical Performance Characteristics

### Frequency Response

Offs 5.1 dB RBW 3 MHz  
 Att 0 dB \* VBW 1 kHz M1[1] -3.00 dB  
 Ref -23.4 dBm SWT 660ms 210.48000000 MHz

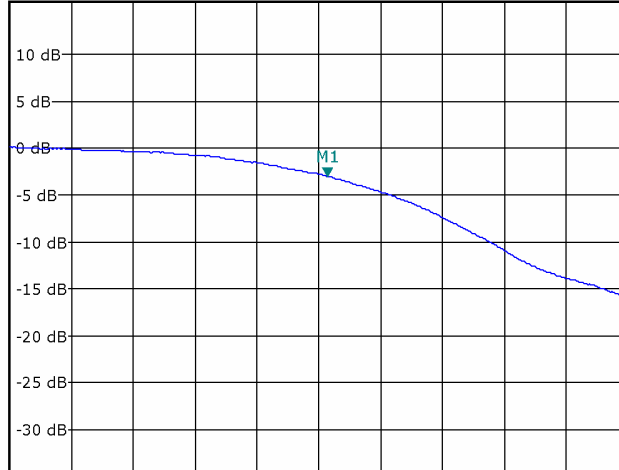


Start 10.0 MHz

Stop 400.0 MHz

### Noise Spectrum

\* RBW 1 MHz  
 Att 0 dB \* VBW 1 kHz Noise1 96.560999 nV/√Hz  
 Ref 7.1 mV SWT 800ms Noise2 208.012239 nV/√Hz  
 200.00000000 MHz

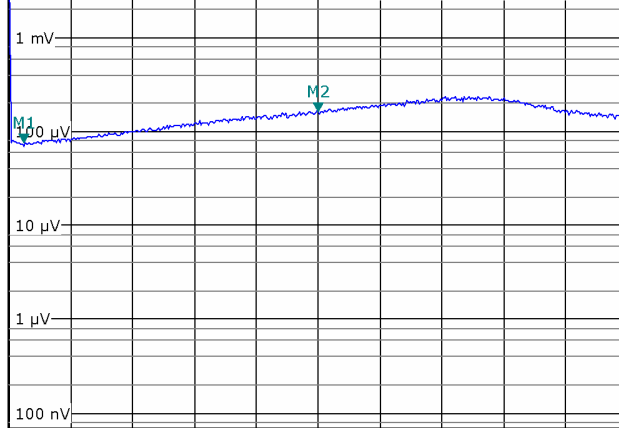

Start 0.0 Hz

Stop 400.0 MHz


Note: Spectral noise data is measured at the amplifier output with open but shielded input. To determine the spectral input noise divide the measured output noise by the amplifier gain of  $2 \times 10^4$  V/A, i.e.:

Marker	Frequency	Output Noise	Resulting Input Noise
1	10 MHz	97 nV/√Hz	4.9 pA/√Hz
2	200 MHz	208 nV/√Hz	10.4 pA/√Hz


# High Speed Current Amplifier

Typical Performance Characteristics (continued)

Pulse Response to Square Wave Input Signal (with 16 times averaging)

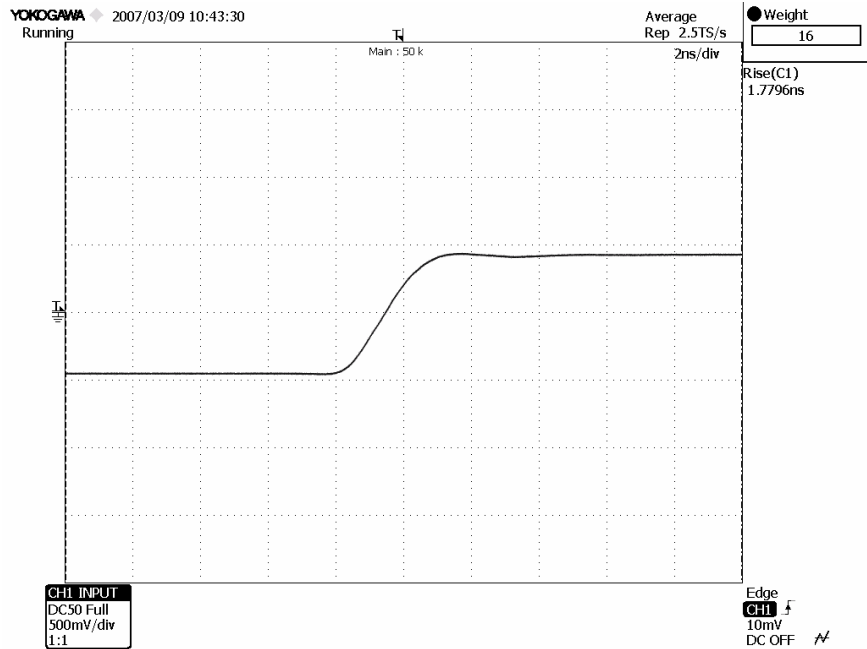



Large Signal Response  
output signal for 100 MHz, 50  $\mu$ A peak-peak input signal (with 4 times averaging)

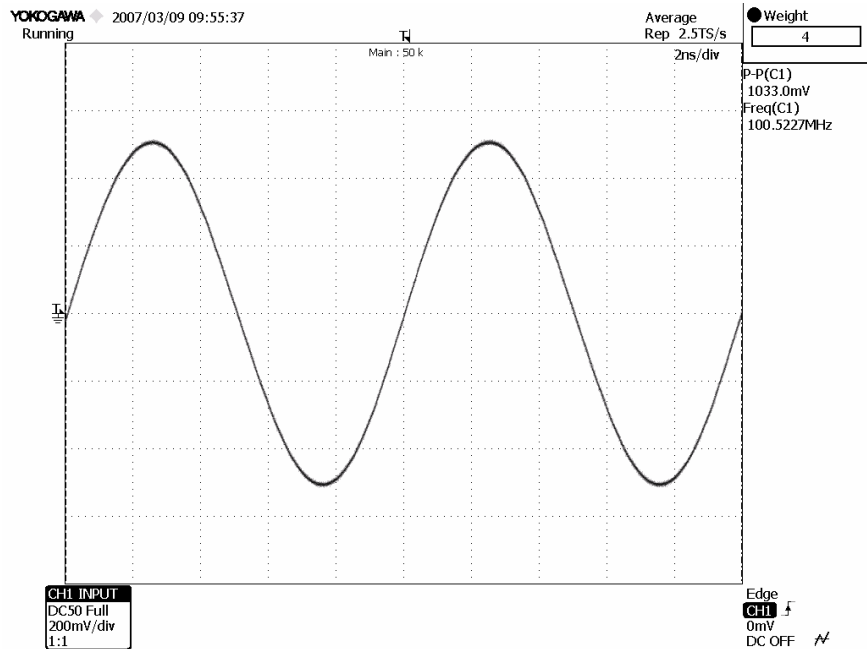

# High Speed Current Amplifier

Typical Performance Characteristics (continued)

Small Signal Response  
output signal for 1 MHz, 1  $\mu$ A peak-peak square wave input signal (without (top) and with 64 times averaging (bottom))

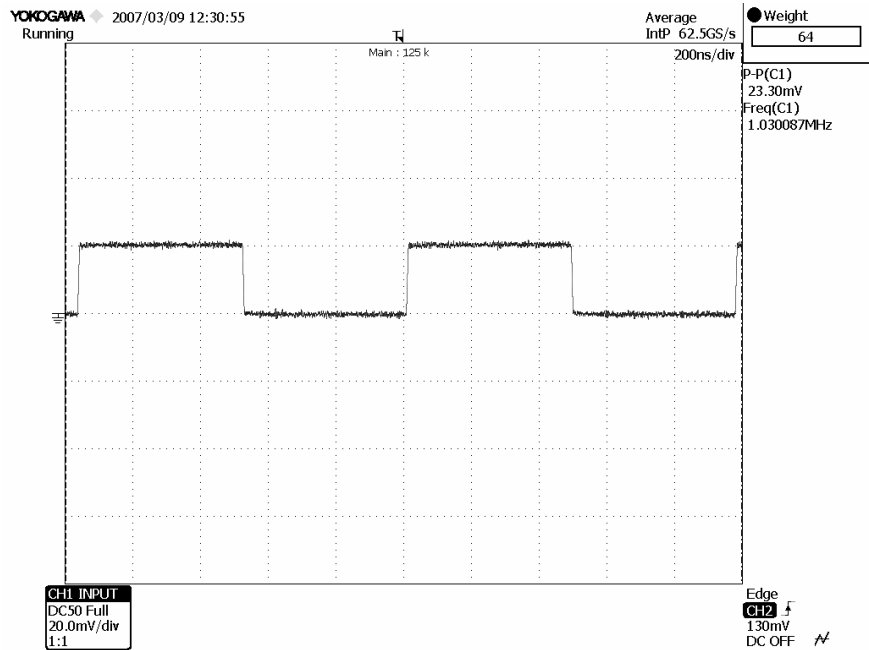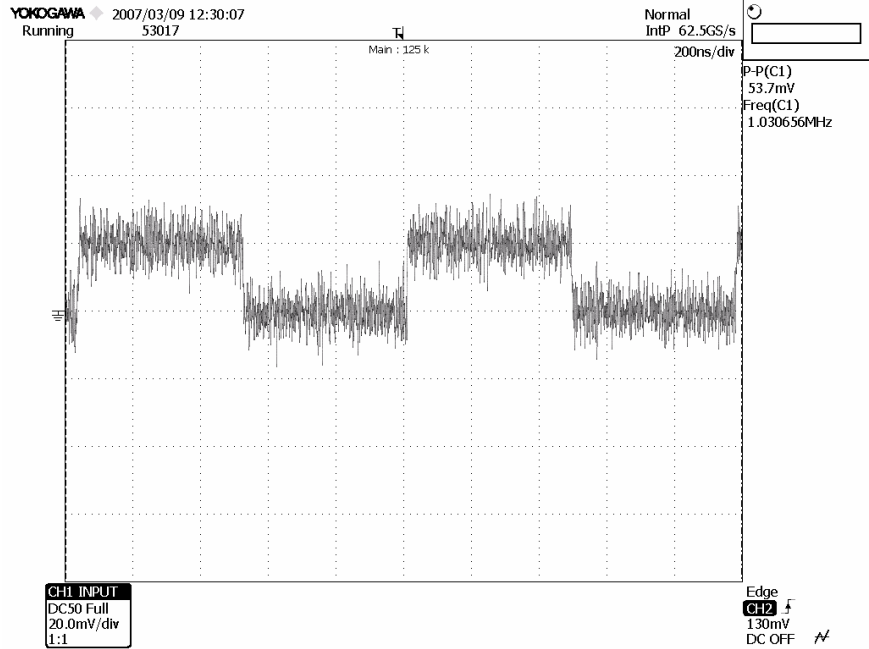


# Datasheet

# HCA-200M-20K-C

## High Speed Current Amplifier

### Dimensions

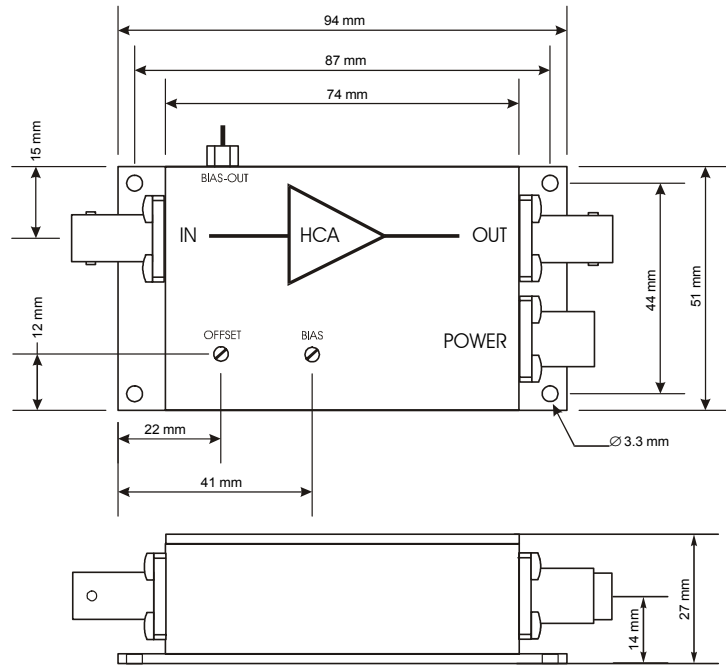

DZ01-0201-22

FEMTO Messtechnik GmbH  
 Klosterstr. 64  
 D-10179 Berlin · Germany  
 Tel.: +49-(0)30-280 4711-0  
 Fax: +49-(0)30-280 4711-11  
 e-mail: [info@femto.de](mailto:info@femto.de)  
<http://www.femto.de>

Specifications are subject to change without notice. Information furnished herein is believed to be accurate and reliable. However, no responsibility is assumed by FEMTO Messtechnik GmbH for its use, nor for any infringement of patents or other rights granted by implication or otherwise under any patent rights of FEMTO Messtechnik GmbH. Product names mentioned may also be trademarks used here for identification purposes only.

© by FEMTO Messtechnik GmbH  
 Printed in Germany