


# MONOLITHIC AMPLIFIERS 50 Ω

## BROADBAND DC to 3 GHz



up to +17.5 dBm output

MODEL NO.	FREQ. (MHz)	GAIN (dB) Typical at MHz				MAXIMUM POWER (dBm)		DYNAMIC RANGE	VSWR (:1) Typ.		ABSOLUTE MAXIMUM RATING <sup>7</sup> (25°C)		DC OPERATING POWER <sup>5</sup> at Pin 3		THERMAL RESISTANCE <sup>6</sup> θjc °C/W	CASE STYLE Note B1	CONNECTION	PRICE \$ Qty. (30)
		100	1000	2000	Note 1 Min.	Output (1 dB Comp.) Typ.	Input (no damage)		NF (dB) Typ.	IP3 (dBm) Typ.	In	Out	I (mA)	P (mW)				
MAR-1SM	DC-1000	18.5	15.5	—	13.0	+1.5	+13	5.5 +14.0	1.3	1.2	40	200	17	5.00	115	WW107	cb	1.04
MAR-2SM	DC-2000	12.5	12.0	11.0	8.5	+4.5	+13	6.5 +17.0	1.5	1.4	60	325	25	5.00	105	WW107	cb	1.17
MAR-3SM	DC-2000	12.5	12.0	10.5	8.0	+10.0	+13	6.0 +23.0	1.5	1.7	70	400	35	5.00	115	WW107	cb	1.24
MAR-4SM	DC-1000	8.3	8.0	—	7.0	+12.5	+13	7.0 +25.5	1.5	1.9	85	500	50	5.25	100	WW107	cb	1.34
MAR-6SM	DC-2000	20.0	16.0	11.0	9.0	+2.0	+13	3.0 +14.5	1.7	1.7	50	200	16	3.50	120	WW107	cb	1.21
MAR-7SM	DC-2000	13.5	12.5	11.0	8.5	+5.5	+13	5.0 +19.0	1.7	1.7	60	275	22	4.00	120	WW107	cb	1.36
MAR-8SM	DC-1000	32.5	22.5	—	19.0	+12.5	+13	3.3 +27.0	#	#	65	500	36	7.80	140	WW107	cb	1.32
MAV-11SM	50-1000	12.7	10.5	—	9.0	+17.5	+13	3.6 +30.0	1.5	1.7	80	550	60	5.50	125	RRR137	cb	1.62



**NOTES:**

- ◆ Aqueous washable
- ☆ Increases below 1500 MHz.
- \* RAM models are hermetically sealed.
- ★ Max. Voltage 7V at pin 1 (DC power). Max. voltage 10V at pins 3,6, DC or transient.
- ❖ Price of RAM models is for 1-9 quantity.
- # Dash-8 models input and output impedances are not 50 ohms, see S-parameter data. Conditionally stable, source and load VSWR<3:1 required. Dash-6 models conditionally stable, source and load VSWR<5:1 required.
- ⊕ Low frequency cutoff determined by external coupling capacitors.
- † Specification at 500 MHz.
- †† Specification at 2500 MHz.
- A. Environmental specifications and re-flow soldering information available in General Information Section.
- B1. Units are non-hermetic unless otherwise noted. For details on case dimensions & finishes see "Case Styles & Outline Drawings". Alternative case styles VV105 or BBB123 available, consult factory.
- C. Prices and Specifications subject to change without notice.
  1. Minimum gain at highest frequency, except VAM-93 at 2 GHz. Full temperature range, except room temperature for Dash-4 models.
  2. Model number designated by color dot or alphanumeric code marking.
  3. Frequency at which output power, NF and IP3 are specified: 500 MHz for MAR-1SM, MAR-6SM, RAM-1, RAM-6, MAV-11SM, VAM-6, 2 GHz for VAM-93, 1000 MHz for all other models.
  4. Dash-6 models potentially unstable with very high VSWR terminations.
  6. Thermal resistance θjc is from hottest junction in the device to the mounting surface of the leads.
  7. Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.
  8. Reliability predictions and normal operating conditions are applicable at current specified.

**model identification**

Model	marking (see note below)
MAR-1SM (see note below)	01
MAR-2SM	02
MAR-3SM	03
MAR-4SM	04
MAR-6SM	06
MAR-7SM	07
MAR-8SM	08
RAM-1	1 or 01
RAM-2	2 or 02
RAM-3	3 or 03
RAM-4	4 or 04
RAM-6	6 or 06
RAM-7	7 or 07
RAM-8	8 or 08
MAV-11SM	A
VAM-3	03
VAM-6	06
VAM-7	07
VAM-93	93
VNA-25	-25

Notes:  
 - Prefix letter (optional) designates assembly location.  
 - MAR-1SM: limited availability; consult factory.

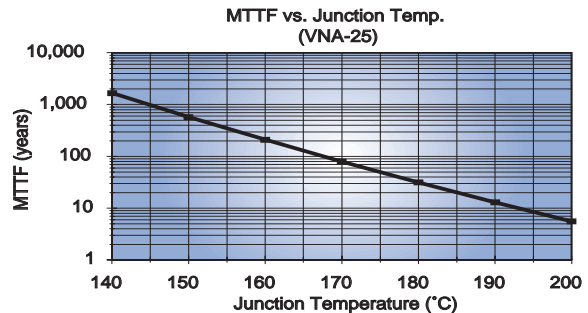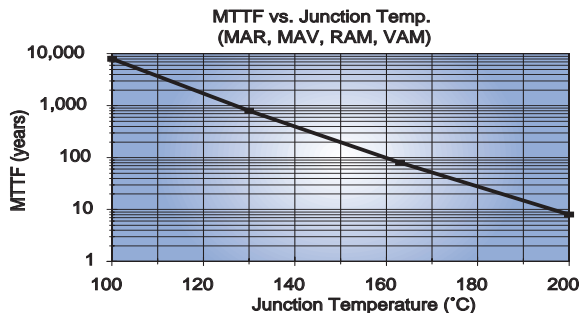


Distribution Centers NORTH AMERICA 800-654-7949 • 417 335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

## Surface Mount

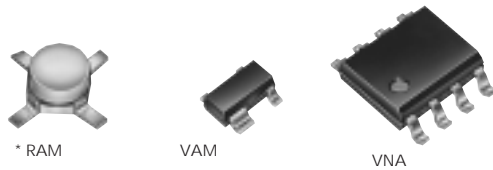


up to +18.2 dBm output

MODEL NO.	FREQ. (MHz)	GAIN (dB) Typical at MHz					MAXIMUM POWER (dBm)		DYNAMIC RANGE	VSWR (:1) Typ.		ABSOLUTE MAXIMUM RATING <sup>7</sup> (25°C)		DC OPERATING POWER <sup>8</sup> at Pin 3		THERMAL RESISTANCE <sup>6</sup> $\theta_{jc}$ °C/W	CASE STYLE Note B	CONNECTION	PRICE \$ Qty. (30)
		100	1000	2000	3000	Note 1 Min.	Output (1 dB Comp.) Typ.	Input (no damage)		NF (dB) Typ.	IP3 (dBm) Typ.	In	Out	I (mA)	P (mW)				
* RAM-1	DC-1000	19.0	15.5	—	—	13.0	+1.5	+13	5.5 +14.0	1.3	1.3	40	200	17	5.00	150	AF190	cb	4.95
* RAM-2	DC-2000	12.5	11.8	11.0	—	8.5	+4.5	+13	6.5 +17.0	1.2	1.4	60	325	25	5.00	145	AF190	cb	4.95
* RAM-3	DC-2000	12.5	12.0	10.5	—	8.0	+10.0	+13	6.0 +23.0	1.6	1.7	80	425	35	5.00	150	AF190	cb	4.95
* RAM-4	DC-1000	8.5	8.0	—	—	7.0	+12.5	+13	6.5 +25.5	1.4	1.9	100	540	50	5.25	140	AF190	cb	4.95
* RAM-6	DC-2000	20.0	16.0	11.0	—	9.0	+2.0	+13	2.8 +14.5	1.4	1.3	50	200	16	3.50	155	AF190	cb	4.95
* RAM-7	DC-2000	13.5	12.5	11.0	—	8.5	+5.5	+13	4.5 +19.0	2.0	1.8	60	275	22	4.00	155	AF190	cb	4.95
* RAM-8	DC-1000	32.5	23.0	—	—	19.0	+12.5	+13	3.0 +27.0	#	#	65	420	36	7.80	175	AF190	cb	4.95
VAM-3	DC-2000	11.5	11.0	9.5	—	7.5	+9.0	+13	6.0 +22.0	1.5	1.7	60	240	35	4.70	500	MMM168	cb	1.19
VAM-6	DC-2000	19.5	15.0	10.0	—	8.0	+2.0	+13	3.0 +14.0	1.6	1.5	40	125	16	3.30	505	MMM168	cb	1.16
VAM-7	DC-2000	13.0	12.0	9.8	—	7.8	+5.5	+13	5.0 +18.0	1.5	1.5	50	175	22	3.80	505	MMM168	cb	1.31
NEW VAM-93	DC-3000	22.3	21.2	19.1	17.1	17.0	+12.7	+13	3.7 +27.0	1.5	1.1	75	330	35	3.2	159	MMM168	cb	1.19
VNA-25	500-2500	14.0†	18.0	16.0††	—	11.5	+18.2	+10	5.5 +27.0	1.5☆	1.6	105	1000	85	5.0★	125	XX211	hj	4.25

### features

- cascadable
- excellent repeatability
- wide bandwidth, DC to 2500 MHz
- unconditionally stable, most models
- low cost
- hermetically sealed, RAM models
- low noise figure, 2.8 dB typ
- high output power, up to +18 dBm typ


### REFLOW - SOLDERING PROFILE

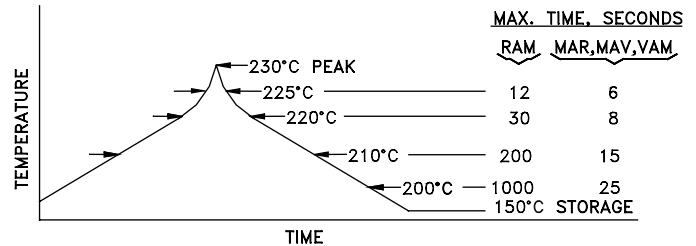


### pin connections

PORT	cb	hj
RF IN	1	3
RF OUT	3	6
DC	3	1
GND EXT	2,4	2,4,5,7,8
NOT USED	—	—

### typical biasing configuration ERA/MAR/MAV/RAM/VAM

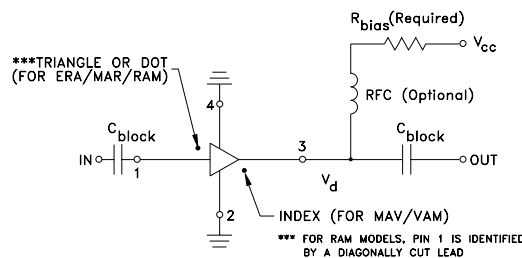

### biasing configuration VNA



### NSN GUIDE

MCL NO.	NSN
MAR-1SM	5962-01-414-8635
MAR-3SM	5962-01-423-1569
MAR-6SM	5962-01-460-6063
RAM-6	5996-01-450-5504

**DESIGNERS KITS AVAILABLE  
SEE PAGES 16&17**