

SOLUTIONS FOR PACKAGING, PRINTING, LABELING

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL: 0755-83376549 FAX: 0755-83376182 E-MAIL: szss20@163.com



Typical Examples Of Select Encoder Applications

Model 225

Model 225 Features:

- Economical Ø2.25" Encoder
- Single Channel or Quadrature Models
- Resolutions to 600 CPR
- Bore Sizes to 7/8", or 22 mm
- Easy Installation



Model 25T/H

Model 25T/H Features:

- Ø2.25" Thru or Hollow Bore Encoder
- Resolution to 10,000 CPR
- Temperatures from -20° to +105° C
- Opto-ASIC Sensor
- Many Flexible Mounting Options



Model TR3 Tru-Trac™

Model TR3 Features:


- Integrated Heavy Duty Encoder and Measuring Wheel
- Resolutions to 10,000 CPR
- Operates Over a Variety of Surfaces
- Speeds up to 3000 Feet Per Minute
- Easily Installed Vertically, Horizontally, or Upside-Down
- Single or Dual Wheel



Model TR1 Tru-Trac™

Model TR1 Features:

- Integrated Encoder and Measuring Wheel
- Overall Size Less Than 4 Inches
- Resolutions to 2540 CPR
- Operates Over a Variety of Surfaces
- Easy Installation In Many Orientations

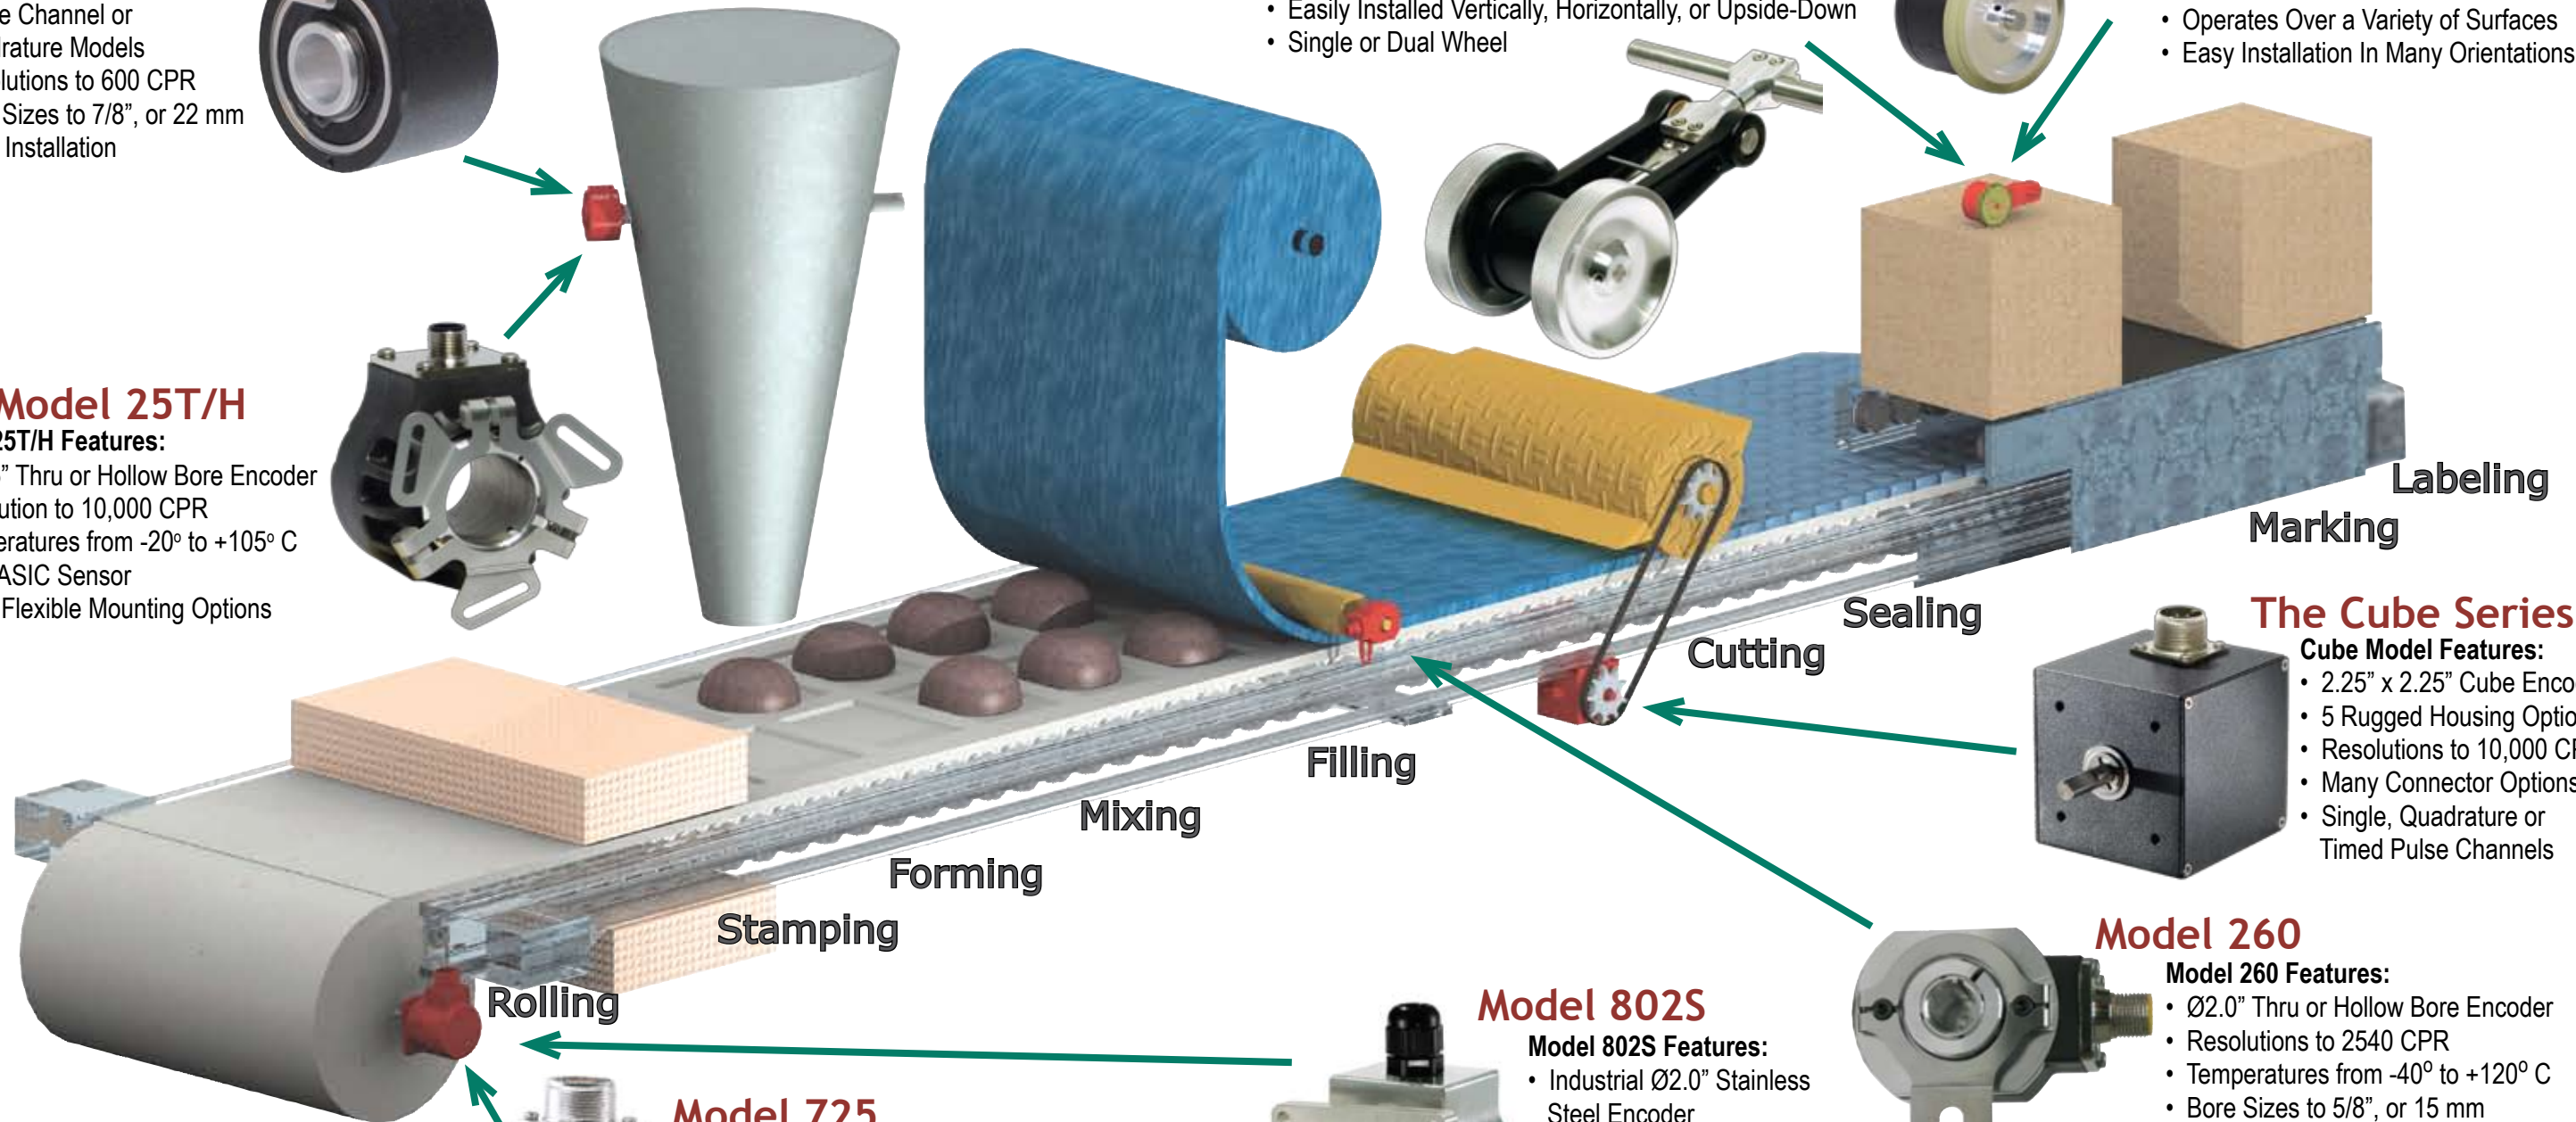

The Cube Series

Cube Model Features:

- 2.25" x 2.25" Cube Encoder
- 5 Rugged Housing Options
- Resolutions to 10,000 CPR
- Many Connector Options
- Single, Quadrature or Timed Pulse Channels



Model 260

Model 260 Features:

- Ø2.0" Thru or Hollow Bore Encoder
- Resolutions to 2540 CPR
- Temperatures from -40° to +120° C
- Bore Sizes to 5/8", or 15 mm
- Many Flexible Mounting Options



Model 802S

Model 802S Features:


- Industrial Ø2.0" Stainless Steel Encoder
- Resolutions to 30,000 CPR
- 0° to +100° C Temp
- Sealing to IP66
- Servo, Flange and Size 25 Mounts Available



Model 725

Model 725 Features:

- Industrial Ø2.5" Encoder
- Resolutions to 30,000 CPR
- 0° to +100° C Temp
- Shafts to 3/8", or 10 mm
- Servo, Flange and 5PY Mounts Available

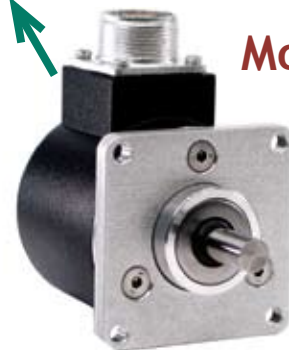

SUNSTAR自动化 <http://www.sensor-ic.com/> TEL: 0755-83376489 FAX: 0755-83376182 E-MAIL: szss20@163.com

www.encoder.com

1-800-366-5412