

AccuStar[®] Electronic Clinometer

Single Axis $\pm 60^\circ$ Range

The AccuStar[®] Electronic Clinometer is an extremely accurate angle measurement device. This compact and rugged sensor is ideal where space is critical and environmental conditions are serious design concerns.

The heart of the system is a patented, capacitance-based sensor with no moving parts. When rotated about its sensitive axis, this unique sensor provides an exceedingly linear variation in capacitance, which is electronically converted into angular data. The sensor and low-power CMOS electronics are encased in a rugged plastic housing ready to install as a system component or as a stand-alone device.

Designed for easy integration, with a choice of analog, ratiometric, digital or serial models, the clinometer produces an output signal corresponding to direction and magnitude of angular displacement.

Features

- ☐ **CE certified**
- ☐ **Just 2" in diameter**
- ☐ **Rugged plastic housing**
- ☐ **Extremely accurate**
- ☐ **Weighs only 2 oz.**

Applications

- ☐ **Wheel alignment**
- ☐ **Construction equipment**
- ☐ **Antenna positioning**
- ☐ **Robotics**



Performance Specifications

Total Range	$\pm 60^\circ$
Linear Range	$\pm 45^\circ$
Threshold	0.001°
Linearity	
Null to 10°	$\pm 0.1^\circ$
10 to 45°	$\pm 1\%$
45 to 60°	Monotonic
Null Repeatability	0.05°
Cross Axis Error	<1% up to 45°
Time Constant	0.3 sec
Freq. Response (-3db)	0.5 Hz
RF Susceptibility	< $\pm 2^\circ$

Environmental Specifications

Temperature Range	
Operating	-30° to 65°C
Storage	-55° to 65°C
Temperature Coefficient	
Null	0.008°/°C
Scale Factor	0.1%/°C
EMC	
Emissions	EN55022 (CISPR 22) Limit B
Radiated Immunity	IEC 801-3 Level 3 10V/m
Burst Transients	IEC 801-4 Level 3 (2 kV)
ElectroStatic Discharge	IEC 801-2 Level 2 (8 kV air, 6 kV contact)
Conducted RF	MIL-STD 461D, CS114, Curve 2
Cable Length	18" standard length with flying lead terminaton

**AccuStar®**Range: $\pm 60^\circ$

Resolution: 0.001°





Choice of Outputs

Design Concept

The unique design is based on a common capacitor plate sandwiched between sensor housing halves. The plate has been etched to form two variable capacitors. The assembled sensor is half filled with a dielectric liquid and inert gas. Rotation of the sensor produces a linear change in capacitance resulting in a corresponding output signal.

How to Order

Model Number	Description
	Ratiometric
02110002-000	Vertical Flange
02110102-000	Horizontal Flange
	Analog
02111002-000	Vertical Flange
02111102-000	Horizontal Flange
	Digital
02112002-000	Vertical Flange
02112102-000	Horizontal Flange
	Serial
02113002-000	Vertical Flange
02113102-000	Horizontal Flange

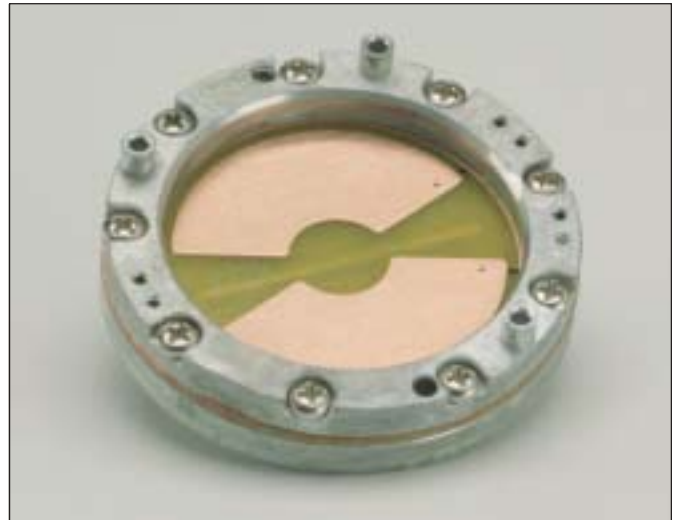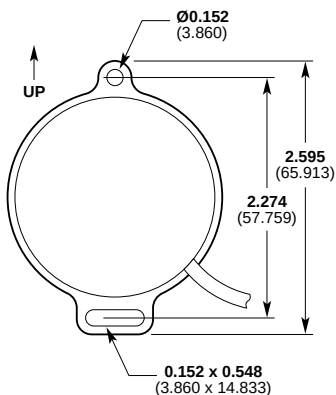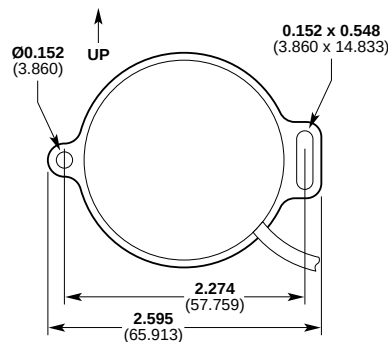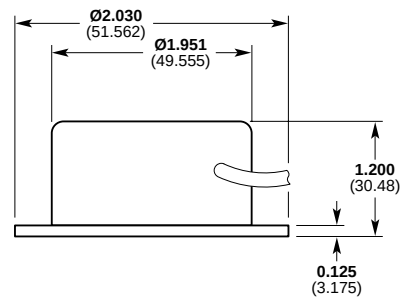**Dimensions** in (mm)**Vertical Flange Mount****Horizontal Flange Mount**

AccuStar[®] Electronic Clinometer


Ratiometric Output

Features


- ❑ **Low power consumption**
- ❑ **3 wire operation**

The Ratiometric clinometer is a signal conditioned sensor that has been designed to operate like a potentiometer. This is a three wire device: power; power ground; and signal. The signal is referenced to power ground. A regulated power supply is required since the output is supply dependent. The midscale output, zero degrees, is 1/2 the supply voltage while the scale factor is also supply dependent. With its low power consumption, 0.5 mA, this device is ideal for battery supplied applications. The Ratiometric clinometer was designed with EMI and ESD suppression circuitry on every line.

Ratiometric I/O Block Diagram

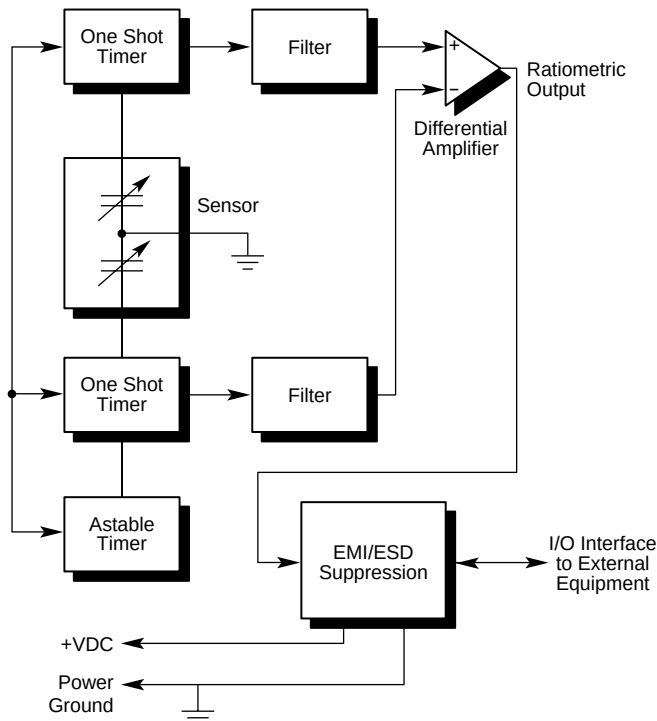

**Ratiometric Output
with 9 VDC supply**

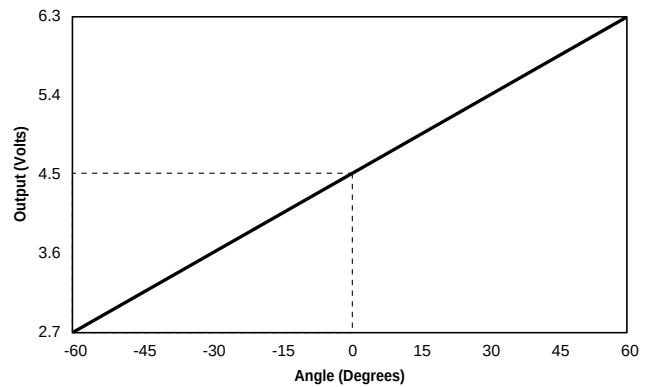

Ratiometric Electrical Specifications

Voltage

Voltage Supply

Nominal +9 VDC

Range (regulated) +5 to +15 VDC

Current 0.5mA

Scale Factor

Nominal (@9VDC) 30mV/degree $\pm 10\%$

Load Resistance (min.) 10 kOhms

Level Output (0°) 1/2Vcc

Electrical Connections

Wire	Source
Black	Power ground
Red	Reg. +5 to +15 VDC
Yellow	Signal output (reference to power ground)

Analog Output


Features

□ **Internally regulated**


□ **Bipolar input/output**

The Analog clinometer is a signal conditioned sensor which has been designed for dc voltage, bipolar operation. The clinometer requires a bipolar supply of ± 8 to ± 15 VDC and delivers an output of ± 3.6 VDC. This device is internally regulated for various applications. The output scale is fixed at a nominal 60mV per degree not dependent on the supply voltage. The Analog clinometer has full EMI and ESD suppression circuitry on every line.

Analog I/O Block Diagram

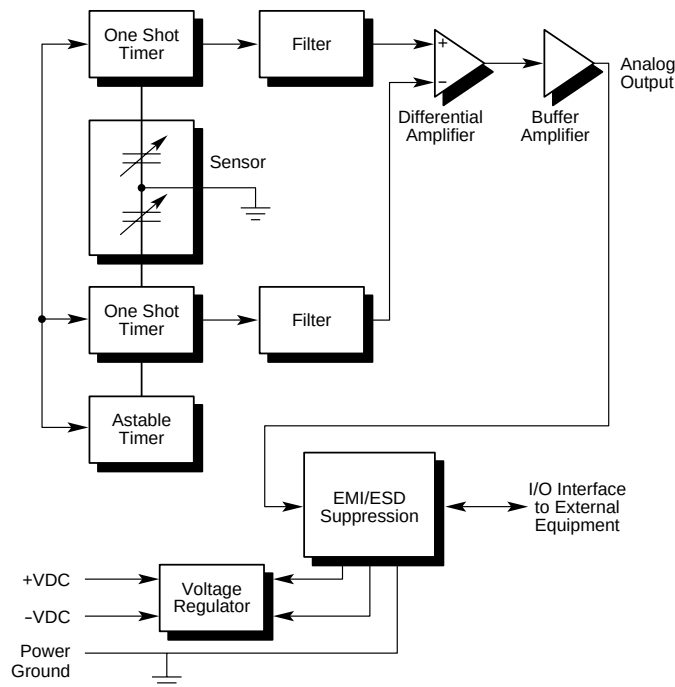

Analog Output

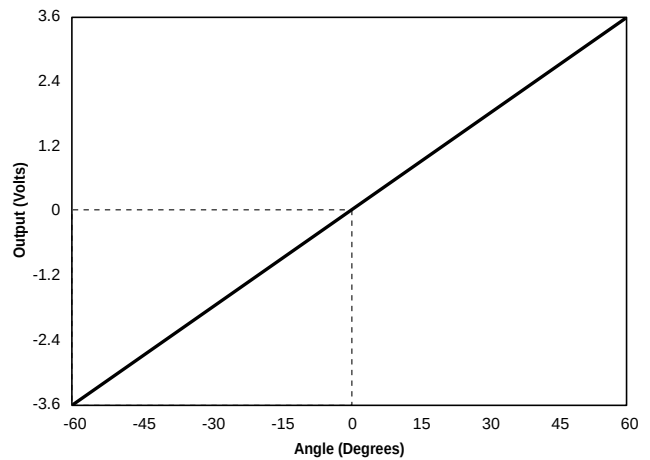

Analog Electrical Specifications

Voltage

Voltage Supply

Nominal ± 12 VDC

Range (regulated) ± 8 to ± 15 VDC

Current 5 mA/supply

Scale Factor 60 mV/degree $\pm 10\%$

Load Resistance (min.) 10 kOhms

Level Output (0°) 0 VDC

Electrical Connections

Wire

Source

Black Power ground

Red +8 to +15 VDC

Gray -8 to -15 VDC

Blue Signal output

(reference to power ground)

AccuStar[®] Electronic Clinometer



Serial Data Output

Features

- ❑ **Microcontroller compatible**
- ❑ **Ideal for noisy environments**


The Serial clinometer is a signal conditioned sensor which resolves the angle of tilt to 16 bits of information plus a polarity bit. This device was designed to transmit data to a microcontroller or to an I/O card of a PC through a three wire interface which will work at both TTL and CMOS logic levels. Complete handshaking is used to eliminate timing and transmission problems. The standard version operates on a +5 VDC regulated power supply while an internally regulated version is available. The Serial clinometer was designed with EMI and ESD suppression circuitry on every line.

Serial I/O Block Diagram

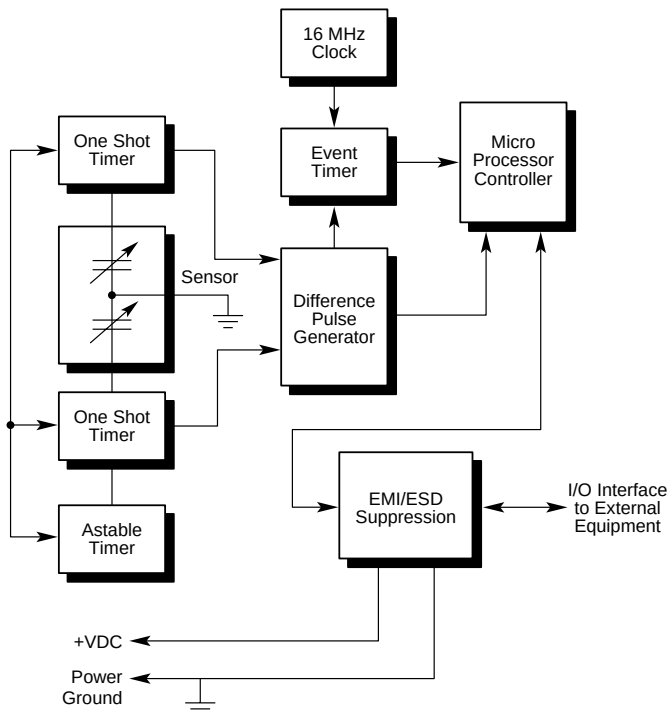

Example

+31.84° = 1 0111 1100 0110 0000



Contact factory for more details.

Serial Electrical Specifications

Voltage

Voltage Supply

Range	+5 VDC, ±5%
Current	15 mA
Scale Factor	1000 counts/degree ±10%
Output	CMOS/TTL
Level Output (0°)	0 counts
Binary Range	16 bits + 1 bit polarity (serial)

Electrical Connections

Wire	Source
Black	Power ground
Red	+5 VDC
Yellow	Data
White	Request/Hold
Gray	Ready/Wait

Digital Pulse Width Output



Features

□ **Internally regulated**

□ **Pulse width output**

The Digital Pulse Width clinometer is a signal conditioned sensor which resolves the angle of tilt to pulses, the length of which are directly proportional to the angle. When a trigger pulse is received on trigger 1 or trigger 2 a pulse is sent out the corresponding PW1 or PW2 line. Comparing the length of the two pulses determines the angle of the sensor. Triggering both lines together allows the user to read Delta PW which is the difference of PW1 and PW2. The polarity line will tell the user if the sensor is tilted clockwise or counterclockwise. The Digital Pulse Width clinometer was designed with EMI and ESD suppression circuitry on every line.

Digital I/O Block Diagram

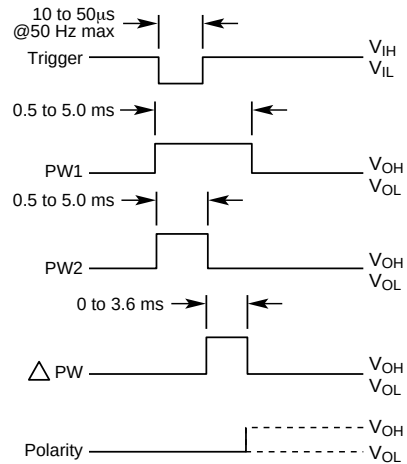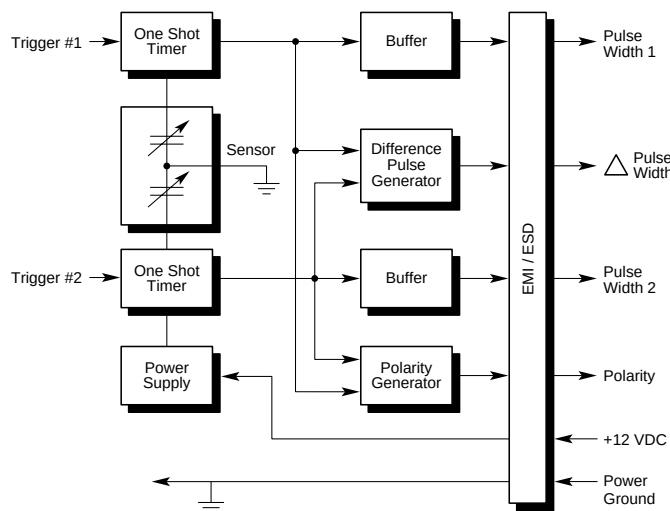

V_{IH} (max) 5.3V

V_{IH} (min) 3.0V

V_{IL} (max) 0.8V

V_{OH} (min) 4.95V

V_{OL} (max) 0.05V

Polarity updated on falling

edge of Δ PW

Polarity high CW, low CCW

Voltage output is TTL compatible. Each output can drive one low power Schottky or multiple CMOS devices.

Data Electrical Specifications

Voltage

Voltage Supply

Nominal 12 VDC

Range 8 to 15 VDC

Current 5 mA

Scale Factor 60 μ sec/degree $\pm 10\%$

Load Resistance 10K ohms

Level Output (0°) DPW = 0 sec.

PW1 = PW2

Trigger Pulse

(CE version) 10 to 50 μ sec @ 50 Hz max.

PW1/PW2 0.5 to 5 msec

Δ PW 0 to 3.6 msec

Polarity High (CW)

Low (CCW)

Electrical Connections

Wire	Source
Black	Ground
Red	8 to 15 VDC
Brown	Trigger 1
Blue	Trigger 2
Green	Polarity
Gray	PW1
White	PW
Yellow	Δ PW

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382