Tactile Switches φ8mm WaterProof Radial Taping Type

New



■Features

- Dust-proof,waterproof structure
- Body size is as small as 8mm diameter.
- Supplied in radial taping

■Application

- Switch for control units of dish washer or laundry machine

■Dimensions (Unit: mm)

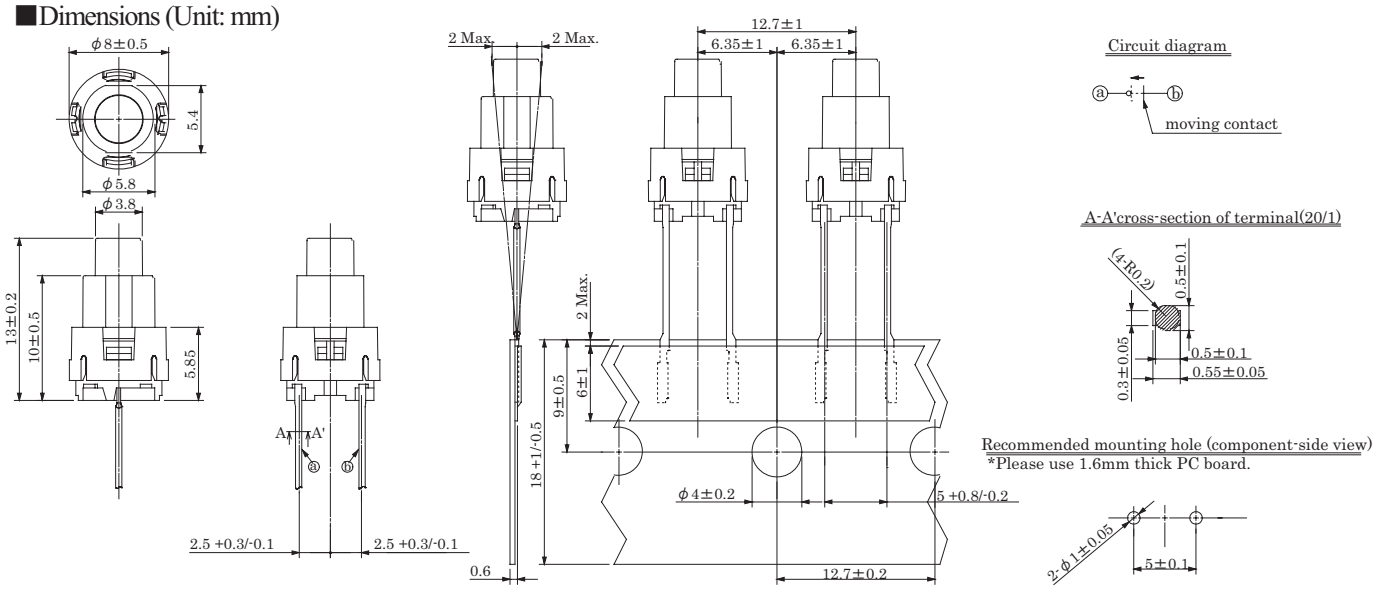

■Specification

Item	Specification	Unit	Note
Operating Temperature Range	-25~+85	℃	
Storage Temperature Range	-40~+85	℃	
Type of Operation	Tactile Feedback		
Contact Configuration	Push-On Momentary, 1 Pole-1 Throw		
Power Rating	Max. 50mA 12VDC		
Contact Resistance	Max. 100	mΩ	
Insulation Resistance	100MΩ Min. at 100VDC		
Dielectric Withstand Voltage	250 VAC for 1 Minute		
Contact Bounce	Max. 10	ms	
Operation Life	100,000	times	
Operating Force	1.96±0.49	N	
Return Force	Min. 0.29	N	
Travel	0.25+0.2/-0.1	mm	
Water Resistance	Immersed 240 hours at 60±2℃ (10 cm) underwater		

■Model Designation

KSM 8W B T S

- S — With resin film
- T — Taping
- B — Operation Force
- 8W — Size & waterproof type
- KSM — Model No.