



## AML Series Panel Cutouts

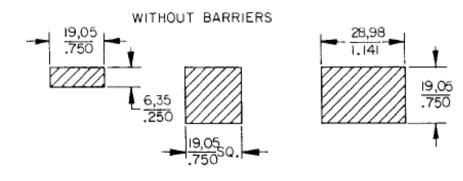







## PANEL CUTOUT FOR SINGLE-STATION FRONT-OF-PANEL MOUNTING

Recommended panel thickness: 1,52 - 4,75 mm [0.060 to 0.187 in].

## WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

For application assistance, current specifications, or name of the nearest Authorized Distributor, contact a nearby sales office. Or call:

1-800-537-6945 USA 1-800-737-3360 Canada

1-815-235-6847 International **FAX** 

1-815-235-6545 USA

## INTERNET

www.honeywell.com/sensing info@micro.honeywell.com

MICRO SWITCH Sensing and Control Honeywell Inc. 11 West Spring Street Freeport, Illinois 61032

