



HELIOWORKS
"Out Shines All Others"

PULSABLE IR SOURCE
Model EP-3964*



Helioworks, Inc. offers a unique Pulsable infrared emitter with a tungsten filament and sapphire window that provides mid IR radiation to over 5 microns. It can operate in pulsed or steady state mode at temperatures in excess of 1900^oK in an industry standard TO-8 package.


Key features include:

- Tungsten filament
- Pulsed or steady state mode
- Internal gold plated parabolic reflector
- Sapphire window
- Standard TO-8 package

Electrical Specifications:


Peak Voltage = 3.5 Volts DC MAXIMUM
Peak Current = 1.0 Amp
Peak Power = 3.5 Watts

Current vs Voltage

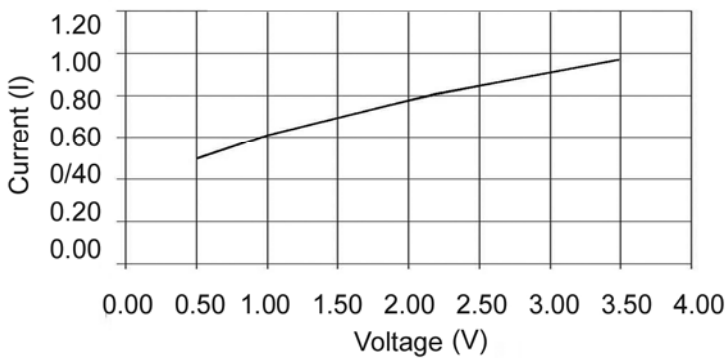


Modulation vs. Frequency

(50% Duty Cycle)

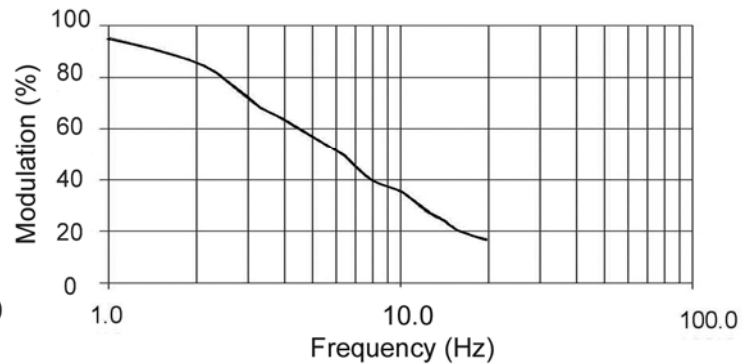

Average Radiant Excitance (Watts/Cm2):

Volts = 3.5, Distance = 3.0 inches from source

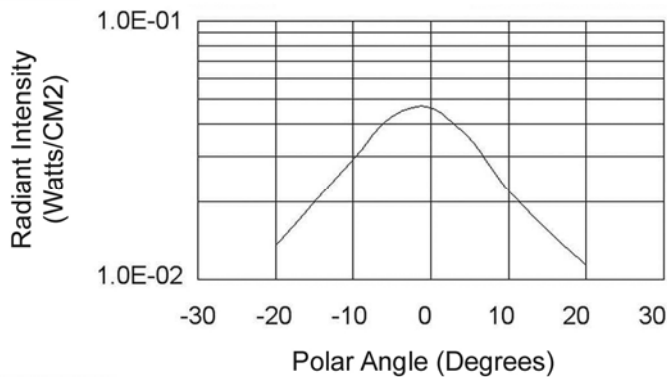

Polar Angle	Average (W/CM2)
-20	1.35E-02
-15	2.00E-02
-10	2.90E-02
-5	4.30E-02
0	4.65E-02
5	3.50E-02
10	2.20E-02
15	1.55E-02
20	1.15E-02

*Patented

Boston Electronics Corporation • 91 Boylston Street, Brookline, MA 02445 USA
Tel: (800) 347-5445 or (617) 566-3821 • Fax: (617) 731-0935