

R30D RVDTs (DC-Operated Rotary Variable Differential Transformers)

RVDTs incorporate a proprietary noncontact design that dramatically improves long term reliability when compared to other traditional rotary devices such as syncros, resolvers and potentiometers. This unique design eliminates assemblies that degrade over time, such as slip rings, rotor windings, contact brushes and wipers, without sacrificing accuracy.

High reliability and performance are achieved through the use of a specially shaped rotor and wound coil that together simulates the linear displacement of a Linear Variable Differential Transformer (LVDT). Rotational movement of the rotor shaft results in a linear output signal that shifts ± 60 (120 total) degrees around a factory preset null position. The phase of this output signal indicates the direction of displacement from the null point. Noncontact electromagnetic coupling of the rotor provides infinite resolution, thus enabling absolute measurements to a fraction of a degree.

Although capable of continuous rotation, most RVDTs are calibrated over a range of ± 30 degrees, with nominal nonlinearity of less than $\pm 0.25\%$ of full scale (FS). Extended range operation up to a maximum of ± 60 degrees is possible with compromised linearity.

R30D


The R30D RVDT is a DC operated noncontacting rotary transducer. Integrated signal conditioning enables the R30D to operate from a bipolar ± 15 VDC source with a high level DC output that is proportional to the full range of the device. Calibrated for operation to ± 30 degrees, the R30D provides a constant scale factor of 125 mVDC/degree. Nonlinearity error of less than $\pm 0.25\%$ FS is achieved while maintaining superior thermal performance over -18°C to 75°C .

The DC excitation is internally converted to an AC carrier signal which excites the transducer's primary coil. An integrated demodulator amplifier and filter convert the differential secondary output into a smooth, high level, DC output signal that is linear with the shaft angle position. Resolution is infinite enabling measurements to a fraction of a degree.

The R30D features a rugged aluminum size 11 housing making this rotary transducer ideal for applications where integrated signal conditioning and small size are required. Typical applications include hydraulic pump control, rotary actuator feedback, and throttle lever position feedback.



wiring

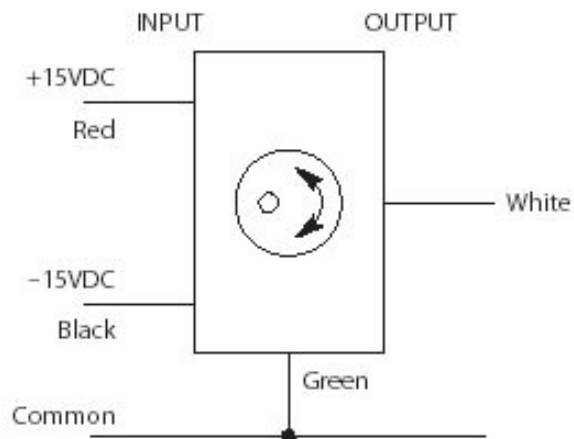

Electrical Specifications

RVDT Model	Linearity		
	Percent of Range		
R30D	$\pm 30^\circ$	$\pm 40^\circ$	$\pm 60^\circ$
	0.25	0.5	2.0


Specifications

Full Range	+/- 30°
Input Voltage (nom)	+/-15 Volts DC (+/- 10%)
Scale Factor	0.125 V/°
Output Voltage (nom)	+/- 3.75 VDC (at 30°)
Input Current	35 mA
Output Current	5 mA
Output Impedance	<10 Ohms
Frequency Response	500 Hz @ -3 dB
Storage Temperature Range	-67°F to 250°F (-55°C to 125°C)
Operating Temperature Range	0°F to 170°F (-18°C to 75°C)
Temperature Coefficient of FS	+/-0.02%/F° (0.04%/°C)
Lead Wires	28 AWG, Teflon insulation, 4 wire, minimum 12" long
Torque	0.015 in-oz
Weight	1.9 oz (53 gm)
Mounting	Size 11 Servo Mount BU-ORD
Bearings	Shielded ABEC 3 Precision
Shaft Diameter	3/16 in (4.76 mm)
Axial Shaft Bearing Load Capacity	10 lbs (4.54 kg)
Radial Shaft Bearing Load Capacity	8 lbs (3.6 kg)
Casing Material	Aluminum

Mechanical Specifications

RVDT Model	Moment of Inertia Pound-Inch-Second	Maximum Torque		Maximum Load		Weight Grams	Servo Mount Bu-Ord
		Unbalance Inch-Ounces	Friction Inch-Ounces	Unbalance Inch-Ounces	Friction Inch-Ounces		
R30D	0.53 x 10 ⁻⁶	.004	.015	8	10	53	11

dimensions

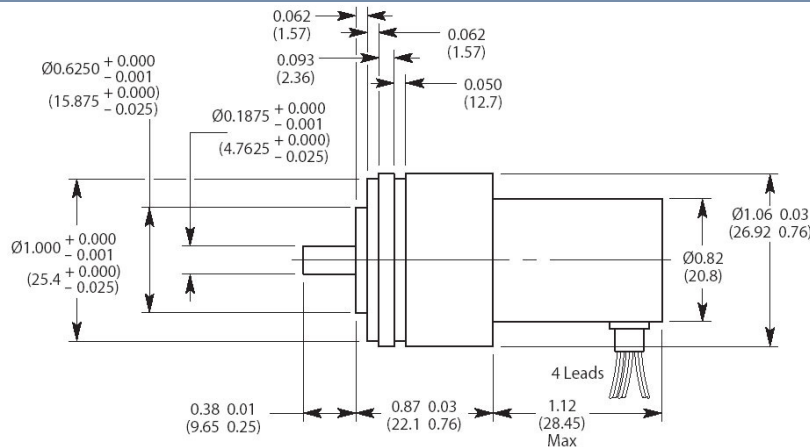

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering information

Specify by Model Number

Model Number
R30D

Size
11

Range
+/- 30°

R-Flex coupler available
separately.

