

QUIET POWER RELAY

1 POLE—20 A (FOR AUTOMOTIVE APPLICATIONS)

FTR-P1 SERIES

■ FEATURES

- Original construction, where reduction of operational noise is considered when mounted on PCB, made it possible to design this quiet relay.
(Average acoustic noise level: 53 dB, distance 10 cm)
- New types of materials are used for the conductive parts, allowing this compact relay to carry 20 AMP.
- Two types of contact material are available for various contact loads.
- Wider contact gap (0.6 mm) version is also available for enhanced cut-off ability to overload condition.



■ ORDERING INFORMATION

[Example] $\frac{\text{FTR-P1}}{\text{(a)}} \frac{\text{C}}{\text{(b)}} \frac{\text{N}}{\text{(c)}} \frac{\text{012}}{\text{(d)}} \frac{\text{N}}{\text{(e)}} \frac{\text{-**}}{\text{(f)}}$

(a)	Series Name	FTR-P1: FTR-P1 Relay
(b)	Contact Arrangement	C : 1 form C (SPDT)
(c)	Contact Gap	N : 0.3 mm gap P : 0.6 mm gap
(d)	Nominal Voltage	009 : 9 VDC 010 : 10 VDC 012 : 12 VDC
(e)	Contact Material	N : Silver-copper-nickel W : Silver-tin oxide-indium
(f)	Custom Designation	To be assigned for custom specification

Note: Part No. is printed on the top of relay as follows.

(Example) Designation ordered: FTR-P1CN012N

Stamp: P1CN012N

FTR-P1 SERIES (QUIET TYPE)

■ SPECIFICATIONS

Item		Specifications	
Contact	Arrangement	1 form C (SPDT)	
	Material	Silver-copper-nickel alloy (N type) Silver-tin oxide-indium (W type)	
	Voltage Drop (resistance)	Maximum 100 mV (at 2 A 12 VDC)	
	Ratings	14 VDC/20 A (locked motor load) 14 VDC/inrush 20 A, break 4 A (motor free load)	
	Maximum Carrying Current	20 A/ 1 hour (25°C, 100% rated coil voltage)	
	Maximum Inrush Current (reference)	N Type: 40 A W Type: 60 A	
	Max. Switching Current (reference)	30 A at 16 VDC	
	Min. Switching Load*1 (reference)	6 VDC 1 A	
Coil	Operating Temperature Range	-40°C to +85°C (no frost) (refer to the CHARACTERISTIC DATA)	
	Storage Temperature Range	-40°C to +100°C (no frost)	
Time Value	Operate (at nominal voltage)	Maximum 10 ms	
	Release (at nominal voltage)	Maximum 5 ms	
Life	Mechanical	1 ×10 ⁷ operations minimum	
	Electrical	2 ×10 ⁵ operations minimum (locked motor load) 4 ×10 ⁵ operations minimum (motor free load)	
Other	Vibration Resistance		10 to 55 Hz (double amplitude of 1.5 mm)
	Shock Resistance	Misoperation	100 m/s ²
		Endurance	1,000 m/s ²
	Weight		Approximately 10.0 g

*1 Values when switching a resistive load at normal room temperature and humidity, and in a clean environment. The minimum applicable load varies with the switching frequency and operating environment.

■ COIL DATA CHART

● 0.3 mm contact gap type

MODEL		Nominal voltage	Coil resistance (±10%)	Must operate voltage	Must release voltage	Thermal resistance
N TYPE	W TYPE					
FTR-P1CN009N	FTR-P1CN009W	9 VDC	135 Ω	5.4 V (at 20°C) 6.8 V (at 85°C)	0.7 V	73°C/W
FTR-P1CN010N	FTR-P1CN010W	10 VDC	180 Ω	6.3 V (at 20°C) 7.9 V (at 85°C)	0.8 V	
FTR-P1CN012N	FTR-P1CN012W	12 VDC	240 Ω	7.3 V (at 20°C) 9.2 V (at 85°C)	0.9 V	

FTR-P1 SERIES (QUIET TYPE)

● 0.6 mm Contact Gap Type

MODEL		Nominal voltage	Coil resistance ($\pm 10\%$)	Must operate voltage	Must release voltage	Thermal resistance
N TYPE	W TYPE					
FTR-P1CP009N	FTR-P1CP009W	9 VDC	100 Ω	5.4 V (at 20°C) 6.8 V (at 85°C)	0.7 V	65°C/W
FTR-P1CP010N	FTR-P1CP010W	10 VDC	135 Ω	6.3 V (at 20°C) 7.9 V (at 85°C)	0.8 V	
FTR-P1CP012N	FTR-P1CP012W	12 VDC	180 Ω	7.3 V (at 20°C) 9.2 V (at 85°C)	0.9 V	


Note: Values in the table of coil resistance and must release voltage are measured at 20°C.

■ SUITABLE APPLICATION


CONTACT MATERIAL	SUITABLE LOAD
N: Silver-copper-nickel	Intermittent wiper
W: Silver-tin oxide-indium	Door lock Power window Solenoids, etc. (locked rotor)

■ CHARACTERISTIC DATA

1. MAXIMUM BREAK CAPACITY

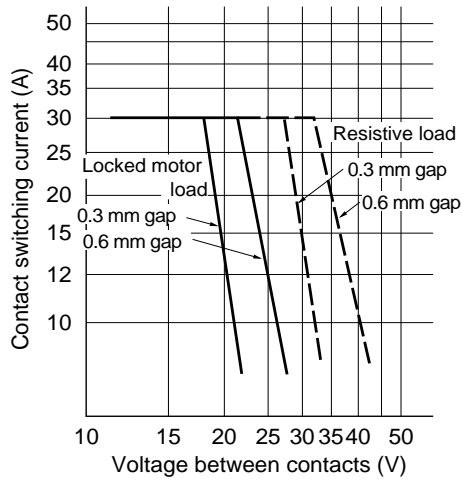

2. LIFE

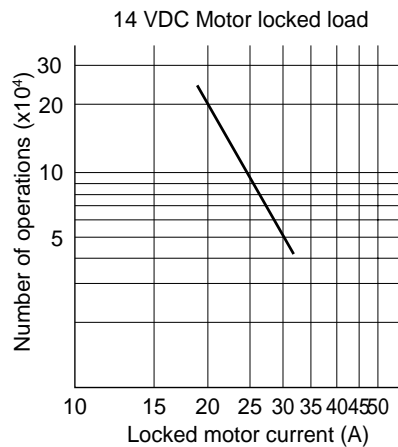


FTR-P1 SERIES (QUIET TYPE)


3. LIFE TEST (EXAMPLE)

- Test item
14 V DC-20 A
Motor Lock
200,000 operations
minimum


- Test circuit




- Shift of pick-up drop-out voltage

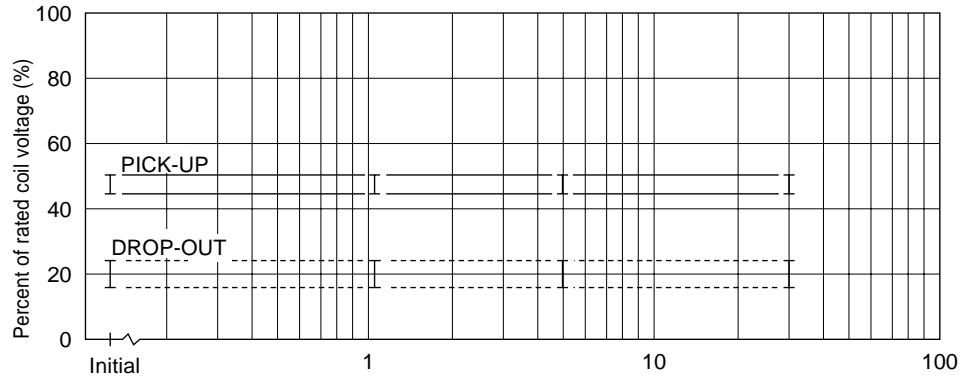

- Current wave form




- Shift of contact resistance

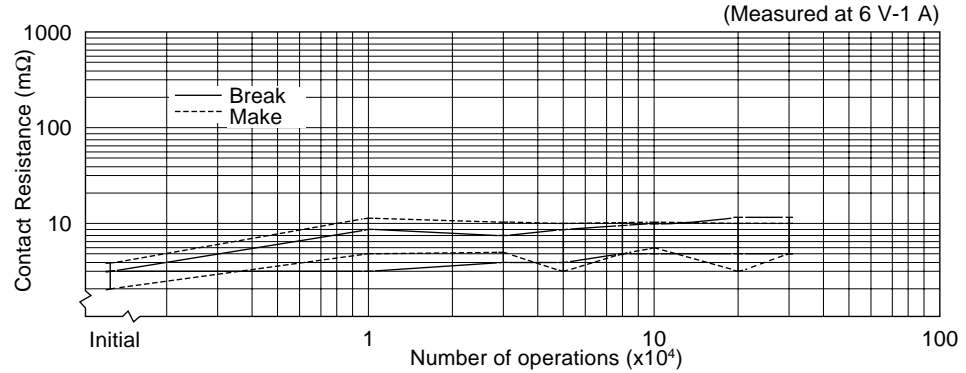


- Test item
14 V DC-20 A
motor free
400,000 operations
minimum


- Test circuit




- Shift of pick-up drop-out voltage

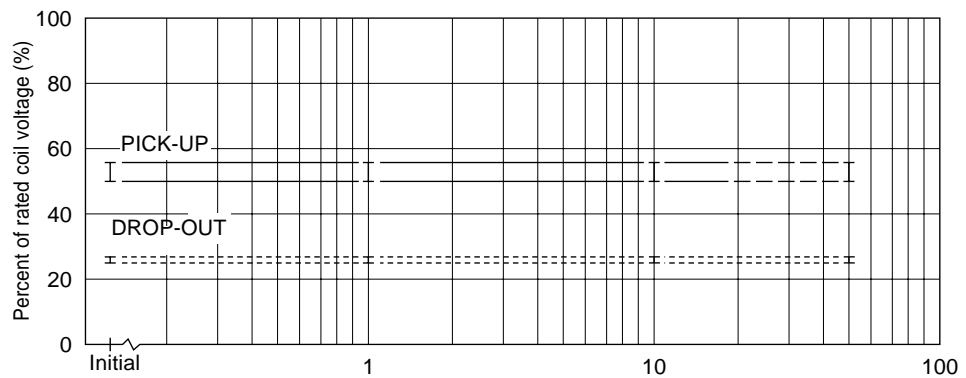

- Shift of contact resistance

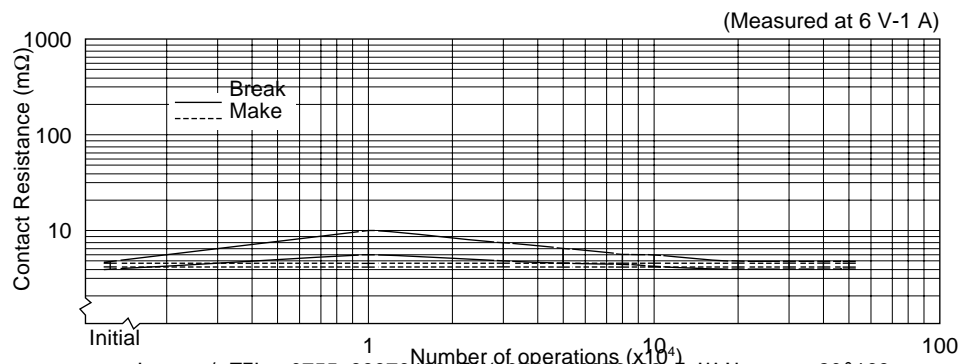


- Current wave form




FTR-P1 SERIES (QUIET TYPE)


4. COIL TEMPERATURE RISE

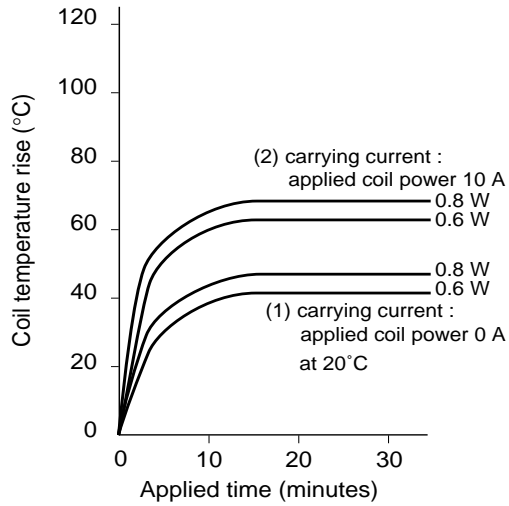


5. OPERATING COIL VOLTAGE RANGE (EXAMPLE)

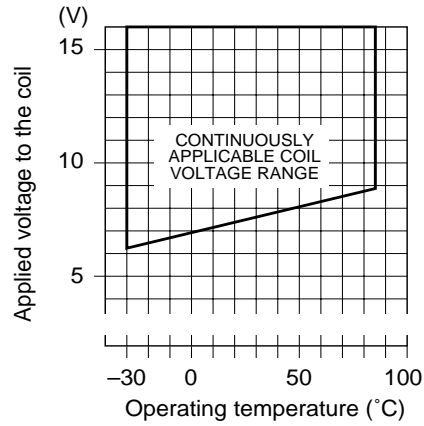


6. VIBRATION RESISTANCE CHARACTERISTICS

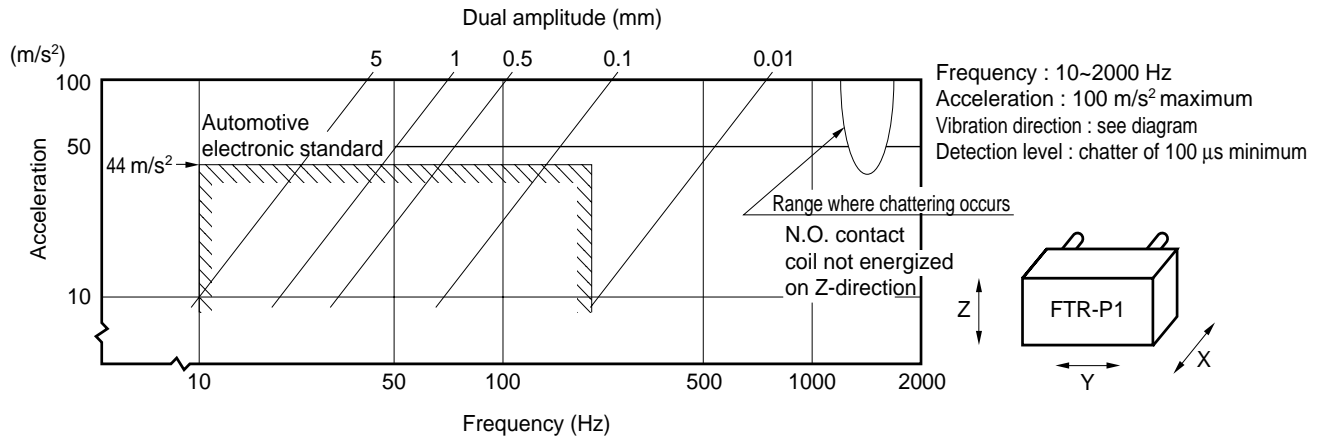

7. SHOCK RESISTANCE CHARACTERISTICS



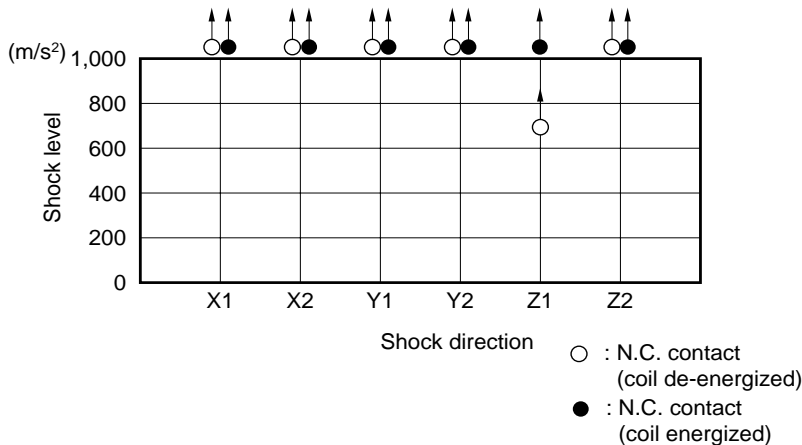


Shock application time : 11 ms, half-sine wave
Test material : coil, energized and de-energized
Shock direction: see diagram
Detection level : chatter of 100 μs minimum





FTR-P1 SERIES (QUIET TYPE)

REFERENCE DATA

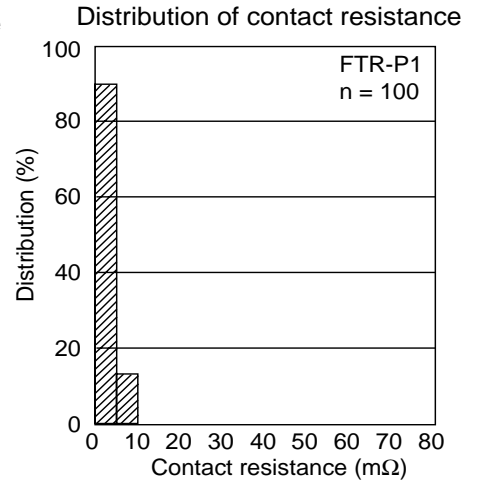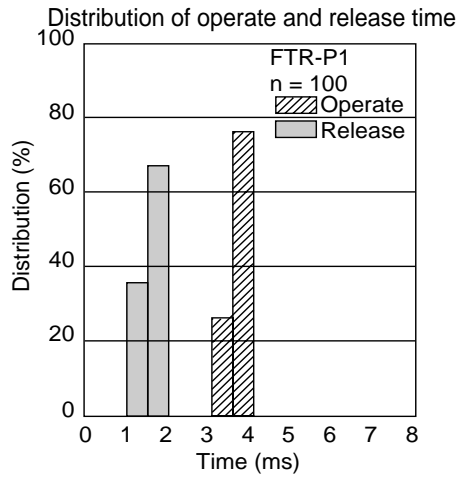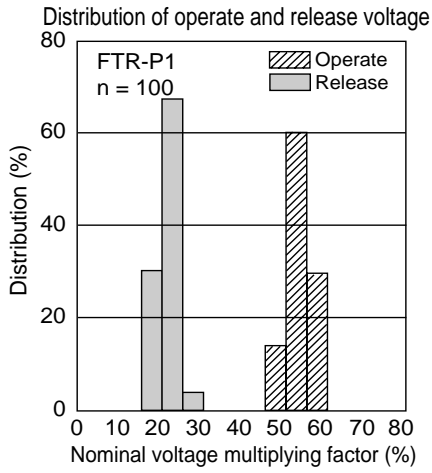


DIMENSIONS

Dimensions

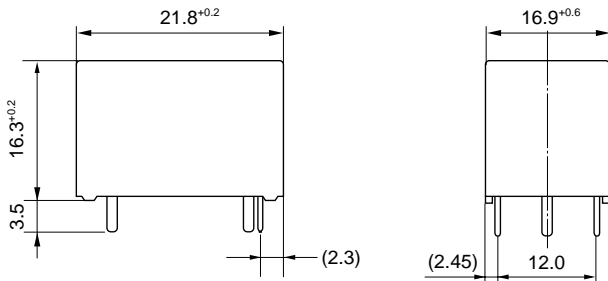


Mounting hole layout (BOTTOM VIEW)

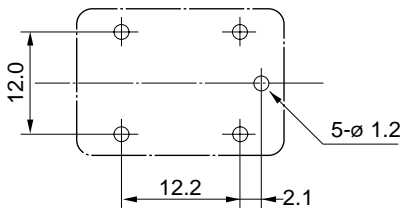

Tolerance ± 0.1

Schematic (BOTTOM VIEW)



Unit : mm

FTR-P1 SERIES (QUIET TYPE)

Fujitsu Takamisawa International Headquarter Offices

www.fujitsu.takamisawa.com

Japan

Fujitsu Takamisawa Component Limited
Global Marketing and Sales
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626

North and South America

Fujitsu Takamisawa America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970

Europe

Fujitsu Takamisawa Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950

Asia Pacific

Fujitsu Takamisawa Asia Pacific Pte. Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 375-8560
Fax: (65) 273-3021