# **Chlorine**

SensoriC CI2 3E 10



#### **FEATURES**

Amperometric 3 electrode sensor cell Low susceptibility to abrupt changes of humidity Low interference to SO2 High poison resistance

#### TYPICAL APPLICATIONS

Portable & fixed point applications
TLV monitoring
Water treatment plants, swimming pools, chemical industry

### PART NUMBER INFORMATION

MINI	0436-032-30009
SENSORIC CLASSIC	0436-032-30069
CTL 4 series adaptation	0436-032-30049
CTL 7 series adaptation	0436-032-30079



#### **TECHNICAL SPECIFICATIONS**

Measuring Range 0-10 ppm; typically: 0–5 ppm

Sensitivity Range 450 nA/ppm ± 200 nA/ppm (negative current)

Zero Current at  $20^{\circ}$ C  $< \pm 20 \text{ nA}$ Resolution at  $20^{\circ}$ C < 0.05 ppm

Bias Potential 0 mV

Linearity < 5% full scale

Response Time at 20°C

< 30 s calculated from 2 min. exposure time</li>
 < 60 s calculated from 2 min. exposure time</li>

Long Term Sensitivity Drift < 10% per 6 months

**Operation Conditions** 

Temperature Range -20°C to + 40°C

Humidity Range 15–90% r.H., non–condensing


Effect of Humidity no effect on zero current

Sensor Life Expectancy > 24 months in air

Warranty 12 months




### **OUTPUT vs. TEMPERATURE:**

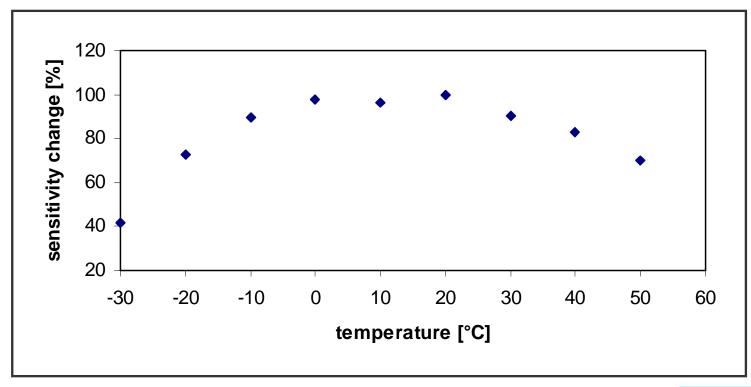



### **ZERO READING vs. TEMPERATURE:**

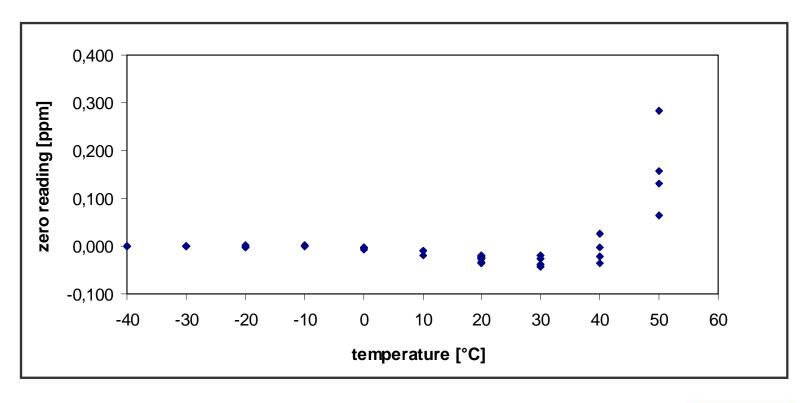



### **CROSS SENSITIVITIES AT 20°C**

Gas	Concentration	Reading [ppm]
Ammonia	100 ppm	0
Bromine	1 ppm	1.0 (theoretical)
Carbon Dioxide	1 %	0
Carbon Monoxide	100 ppm	0
Chlorine Dioxide	2.4 ppm	0.55
Hydrogen	3000 ppm	0
Hydrogen Sulfide	20 ppm	0.1
Nitrogen Dioxide	10 ppm	4.5
Ozone	0.25 ppm	0.11
Sulfur Dioxide	20 ppm	0

#### Notes:

- 1. Interference factors may differ from sensor to sensor and with life time. It is not adviseable to calibrate with interference gases.
- 2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

