


# Model IMM-1129F-635-1-E-K

SUNSTAR 传感与控制 <http://www.sensor-ic.com/> TEL: 0755-83376549 FAX: 0755-83376182 E-MAIL: szsss20@163.com  
 Order Number: 1206000021




## Applications

- Positioning
- Metrology

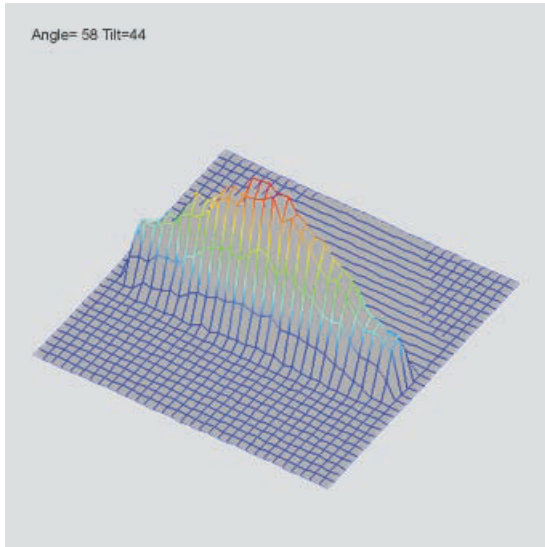

Typical Beam Profile

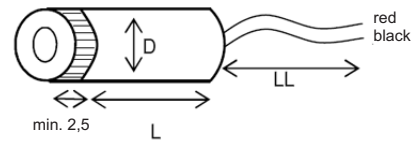

Dimensions according to DIN ISO 2768 f if not specified otherwise. Drawing not in scale

D (mm)	11
L (mm)	29 <sup>1)</sup>
LL (mm)	150 ± 20

Parameter @ Tc=25°C	Min.	Typ.	Max.
Wave length	n. a.	635 nm	643 nm
Operating temperature	5 °C	25 °C	40 °C
Storage temperature	-25 °C	n. a.	70 °C
Beam diameter @ 1/e <sup>2</sup>		3.4 x 0.8 mm <sup>2</sup>	
Focal length range	20 mm		∞
Beam divergence			0.8 mrad
Beam deviation			25 mrad
Optical output power			0.99 mW
Operating voltage Vcc	4.5 V DC		5.5 V DC
Operating current			50 mA
Laser protection class	2		
Lens type	Aspherical plastic lens		
Casing	Aluminium black anodized		
Beam setting	Adjustable focus		

**Compliant with RoHS-requirements (2002/95/EG vom 27.01.2003)**

**Features:** - Threaded focus adjustment

Note: The above product specifications are subject to change without notice.

<sup>1)</sup>+knurl



**Electro Optical Components, Inc.**

SUNSTAR 传感与控制 <http://www.sensor-ic.com/> TEL: 0755-83376489 FAX: 0755-83376182 E-MAIL: szsss20@163.com

5460 Skylane Boulevard, Santa Rosa, CA 95403

Phone: (707) 568-1642 • FAX: (707) 568-1652