

# Model 2101 Dual Range Standard Load Cell Compression-Only (U.S. & Metric)

**Why the Interface model 2101 Dual Range Standard Load Cell Compression-Only is the best in class:**


- Dual range allows for accurate measurements throughout test range
- 4X to 5X overload protection on lower capacity load cell
- Proprietary Interface temperature compensated gages
- High output for both ranges-to 4 mV/V
- Eccentric load compensated
- Shunt calibration
- Low deflection



## SPECIFICATIONS

Lower Capacity Same as  
1200 Compression-Only Low Profile

Higher Capacity Same as  
1200 Universal Low Profile

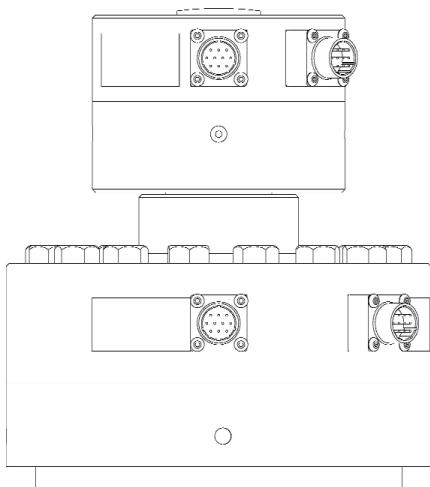

## DIMENSIONS

MODEL							
2111		2121		2131		2141	
CAPACITY							
U.S.(lbf)	Metric (N)	U.S.(lbf)	Metric (N)	U.S.(lbf)	Metric (N)	U.S.(lbf)	Metric (N)
1K/5K	5kN/25kN	5K/25K	25kN/100kN	25K/100K	125kN/450kN	50K/150K	250kN/900kN
2K/10K	10kN/50kN	10K/50K	50kN/250kN			100K/270K	450kN/1200kN
Lower capacity load cell same as 1200 Compression only							
Higher capacity load cell same as 1200 Universal							
Contact factory for further details							