

25 kW Water-cooled dummy load



SUNSTAR微波光电 <http://www.rfoe.net> TEL: 0755-83396822 FAX: 0755-83376182 E-MAIL: szss20@163.com



Standards
NF C 96-315
MIL-DTL-39030



Impedance	50 Ω ± 5%
Frequency	DC - 1 GHz
Max VSWR	≤ 1.10 at 860 MHz
Average power @ 40°C	25 kW (Potable water) 20 kW (Mixture with 35% ethylene glycol)
Cooling	Water + forced air
Potable water	7 < pH < 8.2, mineral salts concentration < 75 ppm
Weight	85 kg

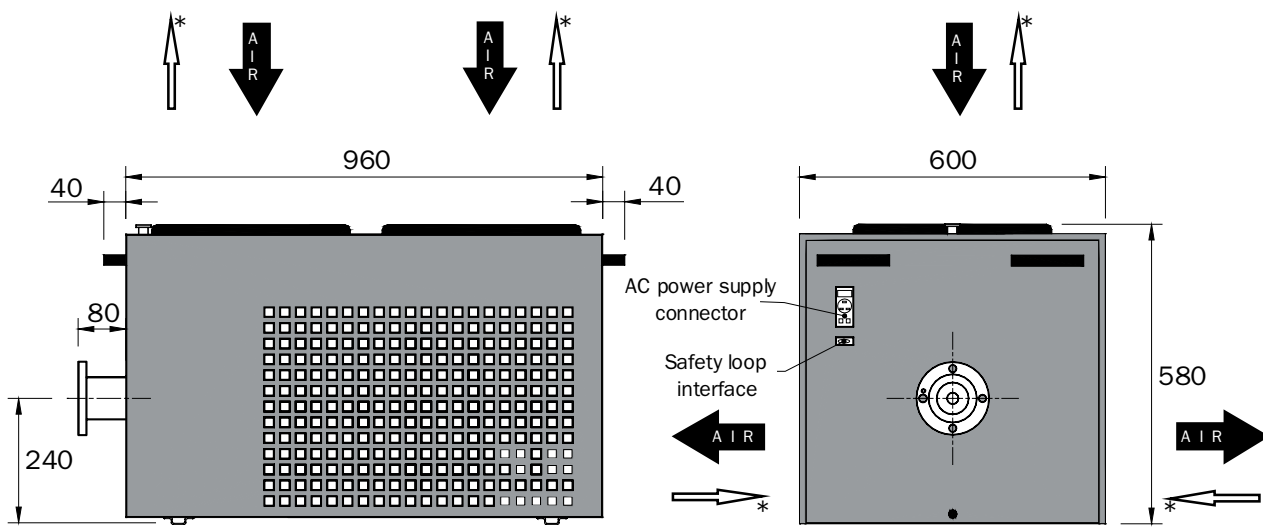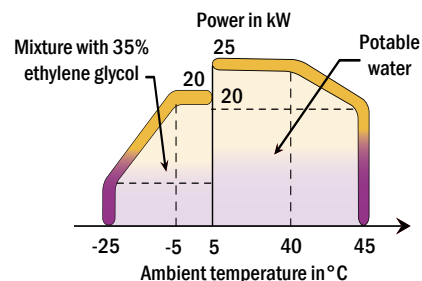

P/N	Connector	AC power supply
17-0055	EIA 3.1/8"	220 V - 50 Hz
17-0341*	EIA 3.1/8"	220 V - 50 Hz
17-0076**	EIA 3.1/8"	220 V - 50 Hz
17-0189	EIA 3.1/8"	220 V - 60 Hz
17-0200	EIA 3.1/8"	115 V - 60 Hz

* Air flow inverted
** with 3% wattmeter probe

Option	3% display unit P/N 42-0032
--------	-----------------------------

Instruction manual and wiring diagram available on request

