


Flexco Microwave, Inc.

PO Box 115, 17 Karrville Road
Port Murray, NJ 07865
Telephone 908-835-1720
Fax 908-835-0002
E-mail sales@flexcoMW.com
http://www.FlexcoMW.com




S752 Flexible Coaxial Cable
2.75 GHz Cable

Frequency vs. Attenuation

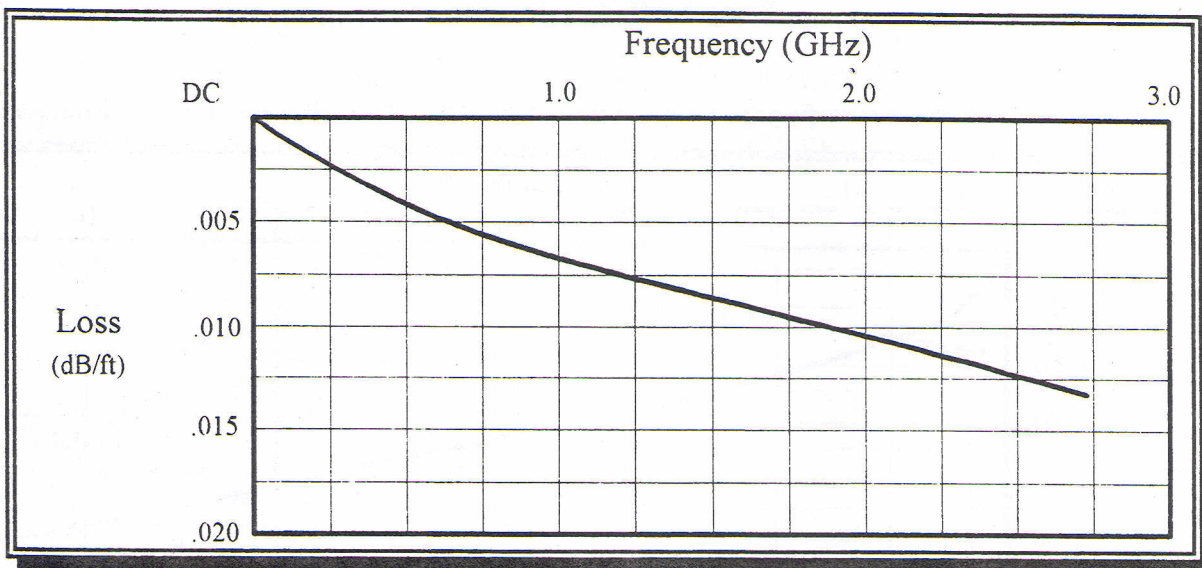

Frequency (GHz)	Typical Insertion Loss (**) (dB/ft)	Precision Connector Maximum VSWR	Non Precision Connector Maximum VSWR	Average Power @ 40°C (KW)
0.03	0.0011	1.20:1	1.30:1	28.0
0.4	0.0042	1.25:1	1.35:1	7.5
1.0	0.0069	1.35:1	1.45:1	4.6
2.0	0.0105	1.35:1	1.45:1	3.1
2.74	0.0130	1.40:1	1.50:1	2.7

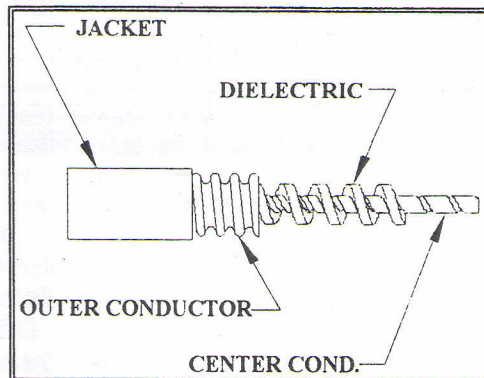

** - Includes precision connector losses

Electrical Characteristics:

Nominal Impedance: 50Ω
Velocity of Propagation: 95 %
Effective Dielectric Constant: 1.11
Time Delay: 1.07 ns/ft
Shielding Effectiveness: -90 dBc min.
Dielectric Withstanding Voltage: 8.0 KV
(@ 60 Hz, Sea Level/25°C)
Nominal Capacitance: 22.5 pF/ft
Maximum Frequency: 2.74 GHz

Physical Characteristics:

Center Conductor: Corrugated copper tube
Dielectric: Air with spiral wound polyethylene
Outer Conductor: Seamless, corrugated copper
1.830" O.D. nominal
Jacket Type: Polyethylene (Black)
Jacketed O.D.: 1.996" O.D. nominal
Minimum Internal Bend Radius: 20.0 inches
Operating Temperature: -55°C to +80°C
Weight per foot: 0.864 lbs.
Connector Interface: Per MIL-C-39012