


Air Ultrasonic Ceramic Transducers

400ST/R100

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com

Dimensions: Dimensions are in mm

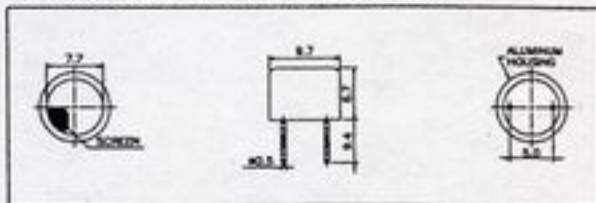

Impedance/Phase Angle vs. Frequency

Tested under 1Vrms Oscillation Level

400SR100 Impedance _____


400SR100 Phase _____

400ST100 Impedance _____

400ST100 Phase _____


Specification

400ST100	Transmitter
400SR100	Receiver
Center Frequency	40.0±1.0Khz
Bandwidth (-6dB) 400ST100	2.5Khz
400SR100	3.0Khz
Transmitting Sound Pressure Level	112dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
Receiving Sensitivity	-70dB min.
at 40.0Khz 0dB = 1 volt/μbar	
Capacitance at 1Khz ±20%	1900 pF
Max. Driving Voltage (cont.)	10Vrms
Total Beam Angle -6dB	72° typical
Operation Temperature	-30 to 80°C
Storage Temperature	-40 to 85°C

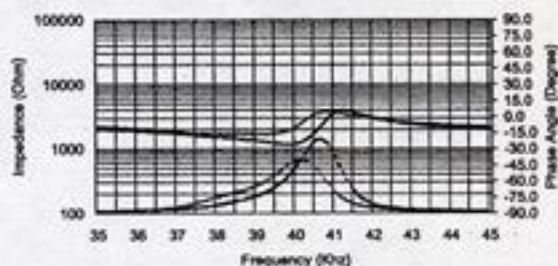

Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

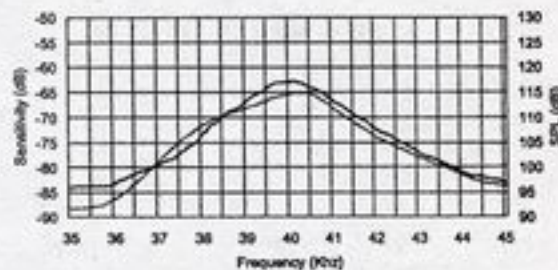


Beam Angle: Tested at 40.0Khz frequency

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.

Model available:


1	400ST/R100	Aluminum Housing
2	400ST/R10B	Black Al. Housing
3	400ST/R10P	Plastic Housing

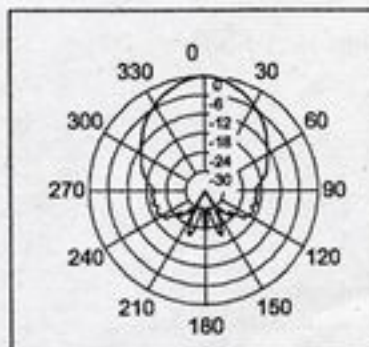


400SR100 Receiver

400ST100 Transmitter


Sensitivity Variation vs. Loaded Resistor

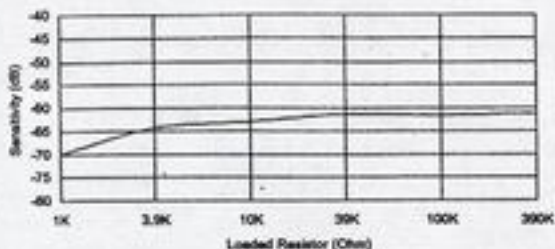


SPL Variation vs. Driving Voltage

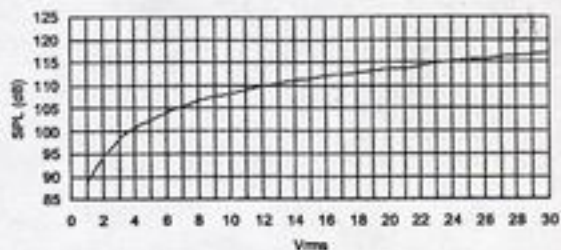


Center Frequency Shift vs. Loaded Resistor

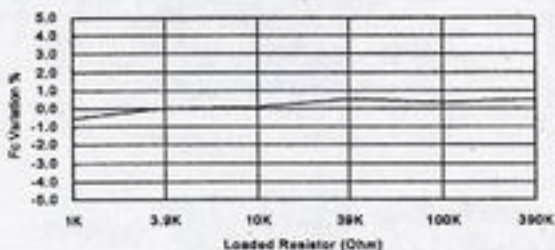


Center Frequency Shift vs. Driving Voltage

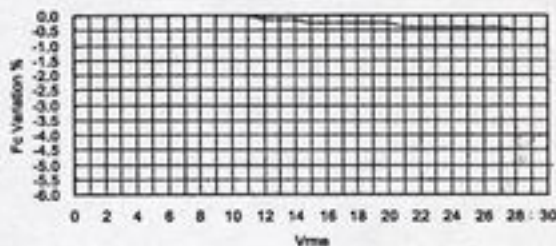


Sensitivity Variation vs. Temperature

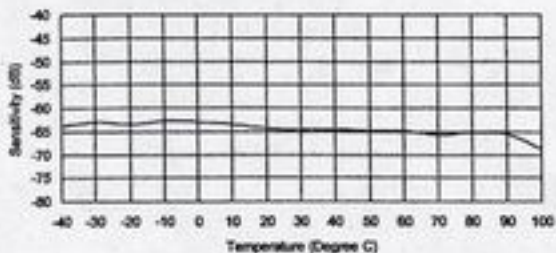


SPL Variation vs. Temperature

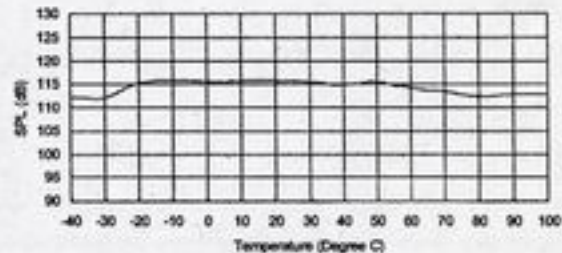

Center Frequency Shift vs. Temperature

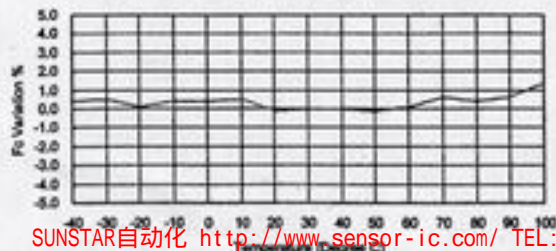

Center Frequency Shift vs. Temperature


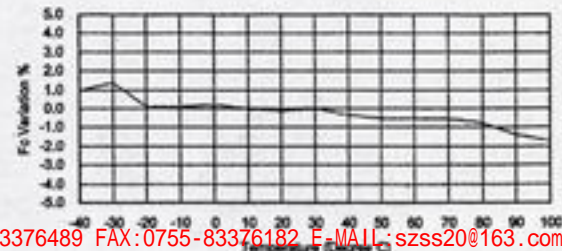


Air Ultrasonic Ceramic Transducers

400ST/R120

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szsss20@163.com

Dimensions: dimensions are in mm

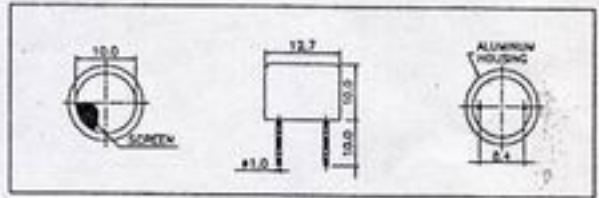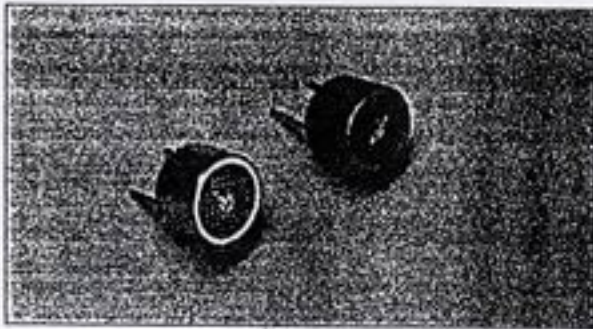

Specification

400ST120	Transmitter
400SR120	Receiver
Center Frequency	40.0±1.0Khz
Bandwidth (-6dB)	400ST120 2.0Khz 400SR120 2.0Khz
Transmitting Sound Pressure Level	115dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
Receiving Sensitivity	-67dB min.
at 40.0Khz 0dB = 1 volt/μbar	
Capacitance at 1Khz	±20% 2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle	-6dB 85° typical
Operation Temperature	-30 to 80°C
Storage Temperature	-40 to 85°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.


Model available:

1	400ST/R120	Aluminum Housing
2	400ST/R12B	Black Al. Housing

Impedance/Phase Angle vs. Frequency


Tested under 1Vrms Oscillation Level

400SR120 Impedance	_____
400SR120 Phase	_____
400ST120 Impedance	_____
400ST120 Phase	_____

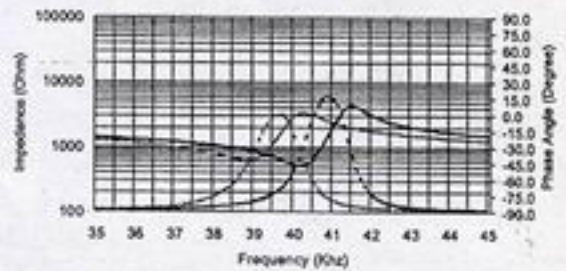

Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm

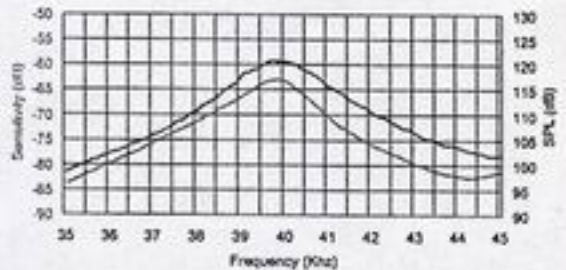


Beam Angle: Tested at 40.0Khz frequency




400SR120 Receiver

400ST120 Transmitter


Sensitivity Variation vs. Loaded Resistor

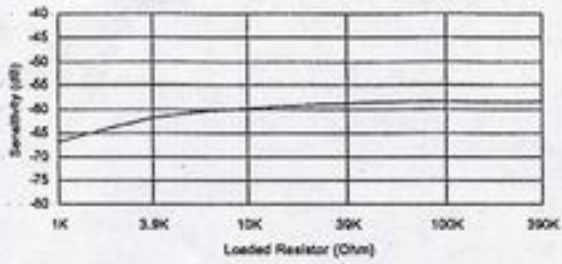


SPL Variation vs. Driving Voltage

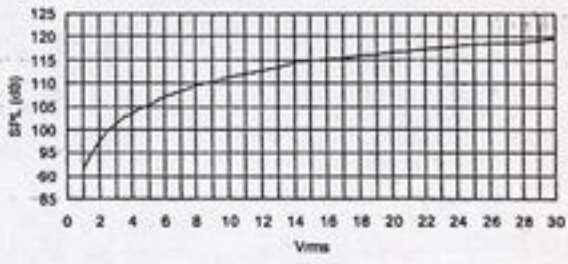


Center Frequency Shift vs. Loaded Resistor

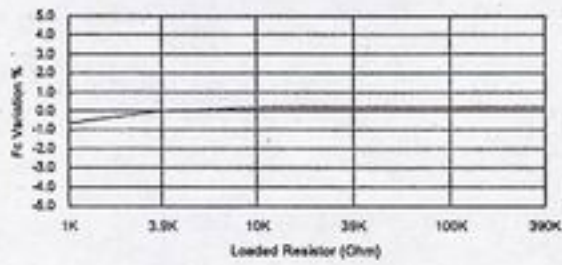


Center Frequency Shift vs. Driving Voltage

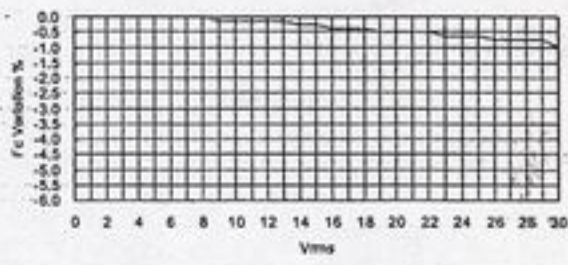


Sensitivity Variation vs. Temperature

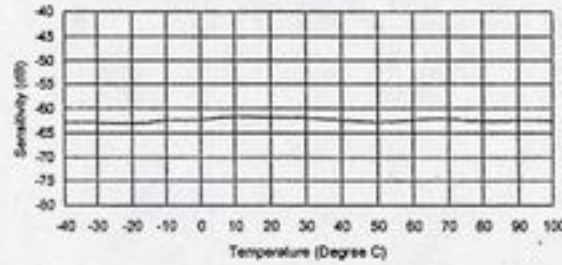


SPL Variation vs. Temperature

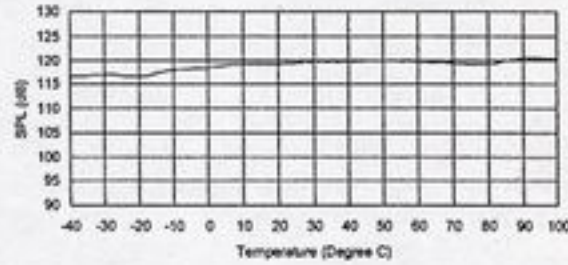

Center Frequency Shift vs. Temperature

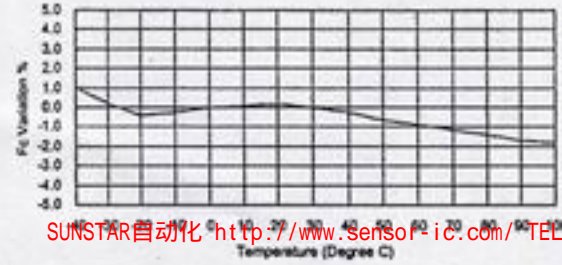

Center Frequency Shift vs. Temperature


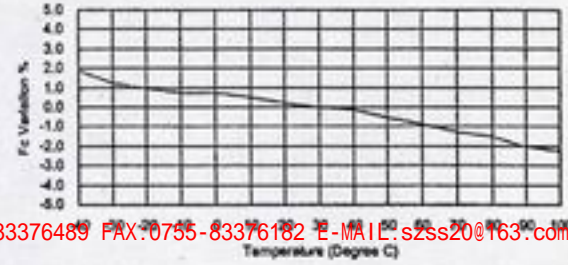


Air Ultrasonic Ceramic Transducers

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com

400ST/R160

Dimensions: dimensions are in mm

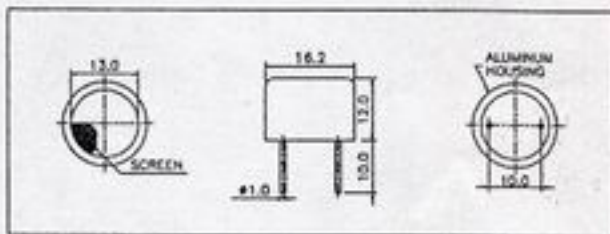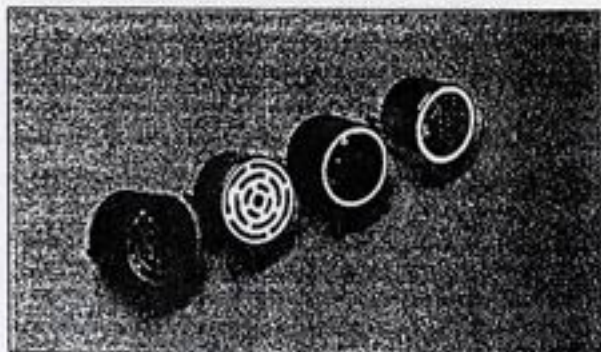

Specification

400ST160	Transmitter
400SR160	Receiver
Center Frequency	40.0±1.0Khz
Bandwidth (-6dB)	400ST160 2.0Khz
	400SR160 2.5Khz
Transmitting Sound Pressure Level	120dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
Receiving Sensitivity	-65dB min.
at 40.0Khz 0dB = 1 volt/μbar	
Capacitance at 1Khz	±20% 2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle	-6dB 55° typical
Operation Temperature	-30 to 80°C
Storage Temperature	-40 to 85°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.


Models available:

1	400ST/R160	Aluminum Housing
2	400ST/R16B	Black Al. Housing
2	400ST/R10P	Plastic Housing
3	400ST/R16F	Al. Housing w/Solid Grid

Impedance/Phase Angle vs. Frequency


Tested under 1Vrms Oscillation Level

400SR160 Impedance	_____
400SR160 Phase	_____
400ST160 Impedance	_____
400ST160 Phase	_____

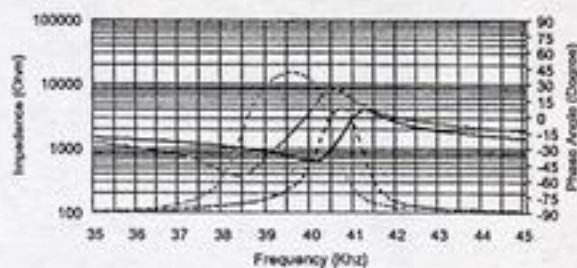


Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

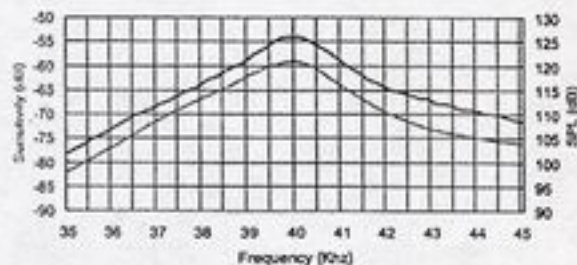


Beam Angle: Tested at 40.0Khz frequency

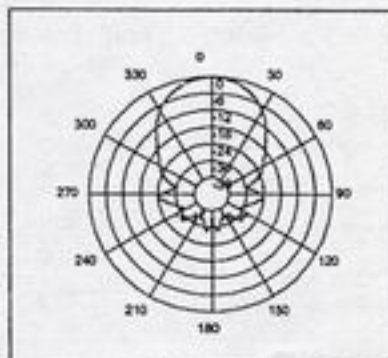


Sensitivity Variation vs. Loaded Resistor

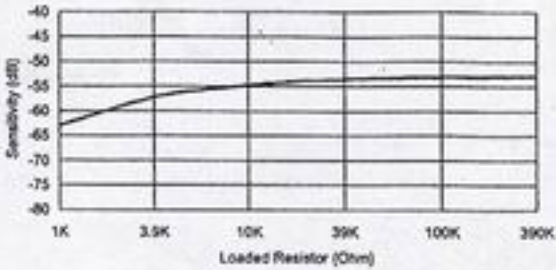


SPL Variation vs. Driving Voltage

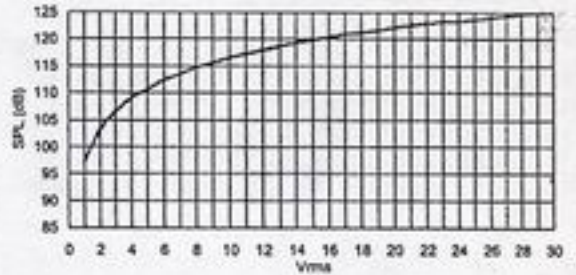


Center Frequency Shift vs. Loaded Resistor

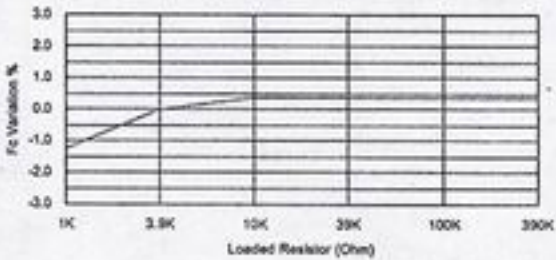


Center Frequency Shift vs. Driving Voltage

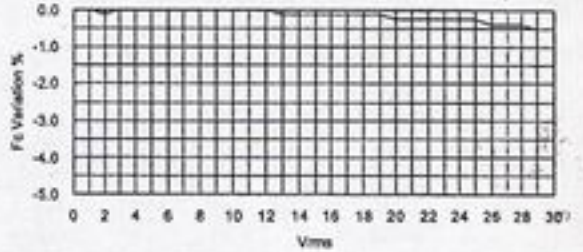


Sensitivity Variation vs. Temperature

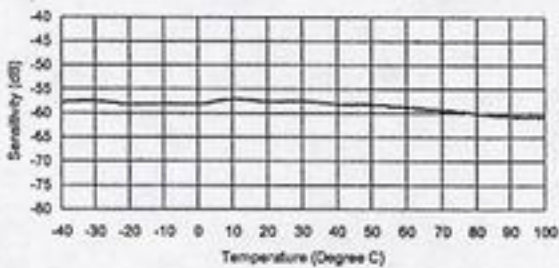


SPL Variation vs. Temperature


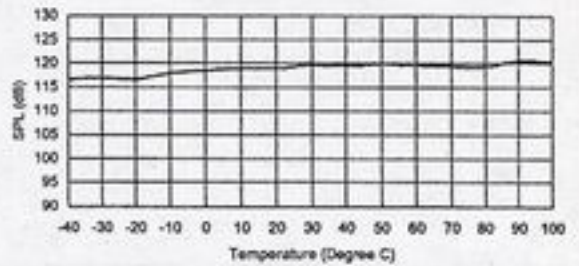


Center Frequency Shift vs. Temperature

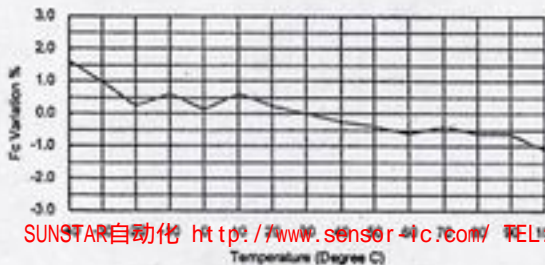

Center Frequency Shift vs. Temperature

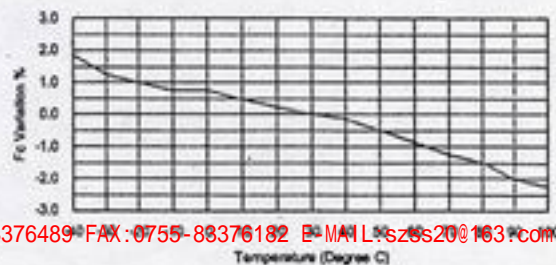

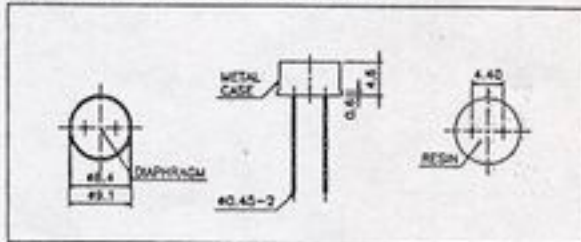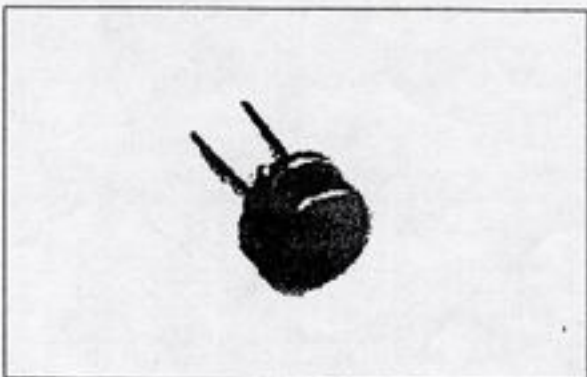

Specification

400ET080	Transmitter
400ER080	Receiver
Center Frequency	40.0±3.0Khz
Bandwidth (-6dB)	400ET080 1.5Khz 400ER080 2.0Khz
Transmitting Sound Pressure Level	100dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
Receiving Sensitivity	-80dB min.
at 40.0Khz 0dB = 1 volt/μbar	
Capacitance at 1Khz	±20% 1700 pF
Max. Driving Voltage (cont.)	15Vrms
Total Beam Angle	-6dB 125° typical
Operation Temperature	-30 to 80°C
Storage Temperature	-40 to 85°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.


Model available:

1	400ET/R080	Plated Metal Housing
---	------------	----------------------

Impedance/Phase Angle vs. Frequency


Tested under 1Vrms Oscillation Level

400ER080 Impedance _____
400ER080 Phase _____
400ET080 Impedance _____
400ET080 Phase _____

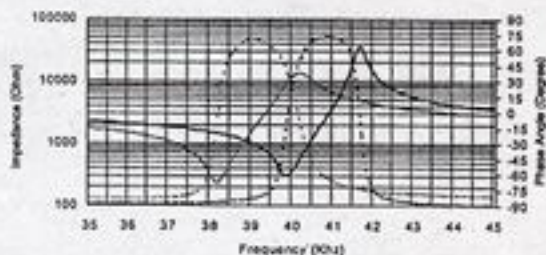


Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

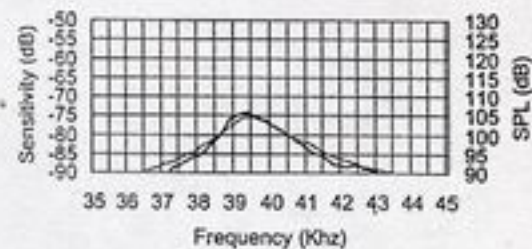


Beam Angle: Tested at 40.0Khz frequency

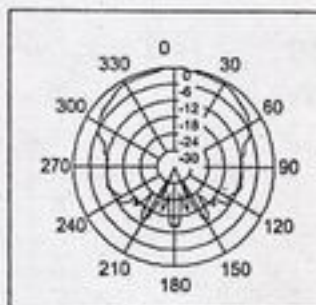


Sensitivity Variation vs. Loaded Resistor

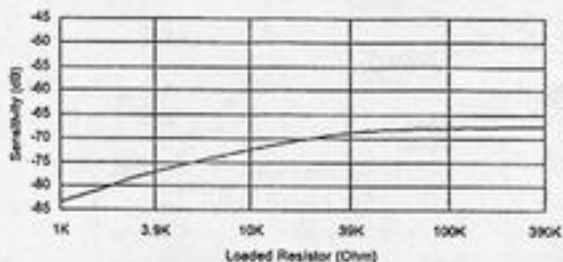


SPL Variation vs. Driving Voltage

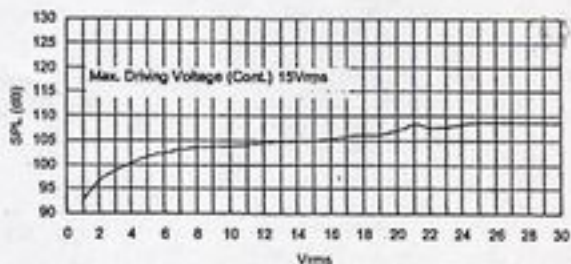


Center Frequency Shift vs. Loaded Resistor

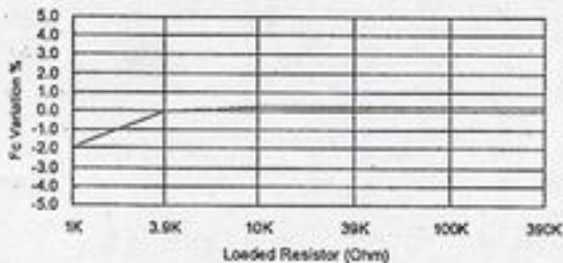


Center Frequency Shift vs. Driving Voltage

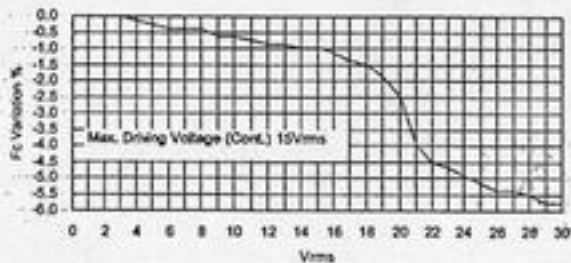


Sensitivity Variation vs. Temperature

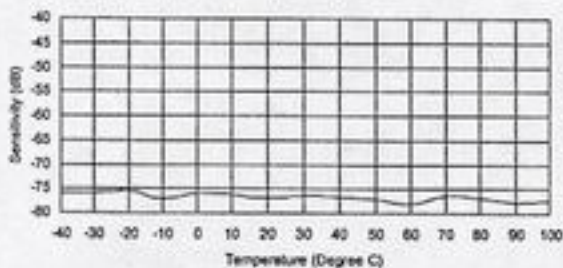


SPL Variation vs. Temperature

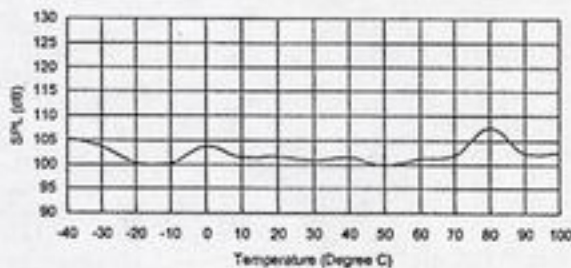



Center Frequency Shift vs. Temperature

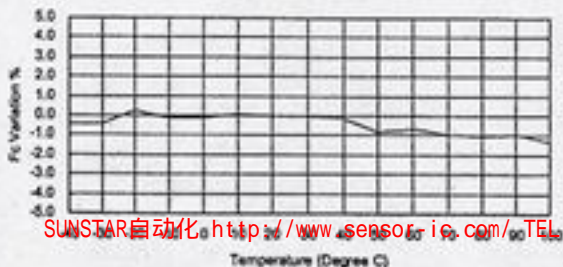

Center Frequency Shift vs. Temperature

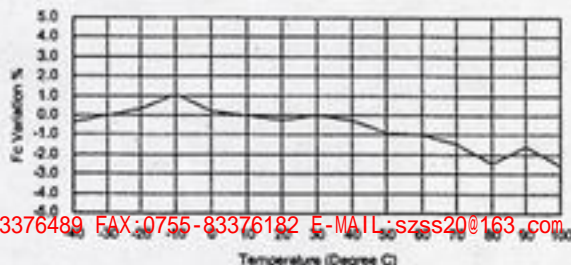

Dimensions: dimensions are in mm

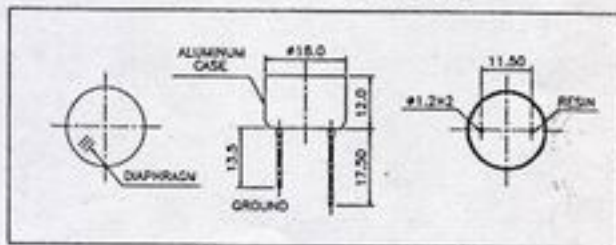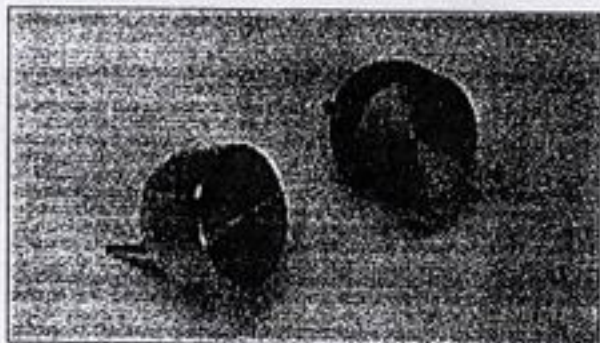

Specification

400ET180	Transmitter
400ER180	Receiver
Center Frequency	40.0±1.0Khz
Bandwidth (-6dB)	400ET180 1.5Khz 400ER180 1.5Khz
Transmitting Sound Pressure Level	115dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
Receiving Sensitivity	-70dB min.
at 40.0Khz 0dB = 1 volt/μbar	
Capacitance at 1Khz ±20%	2400 pF
Max. Driving Voltage (cont.)	15Vrms
Total Beam Angle	-6dB 30° typical
Operation Temperature	-30 to 80°C
Storage Temperature	-40 to 85°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.

Model available:


1	400ET/R180	Aluminum Housing
2	400ET/R18B	Black Alum. Housing

P.29

Impedance/Phase Angle vs. Frequency


Tested under 1Vrms Oscillation Level

400ER180 Impedance	_____
400ER180 Phase	_____
400ET180 Impedance	_____
400ET180 Phase	_____

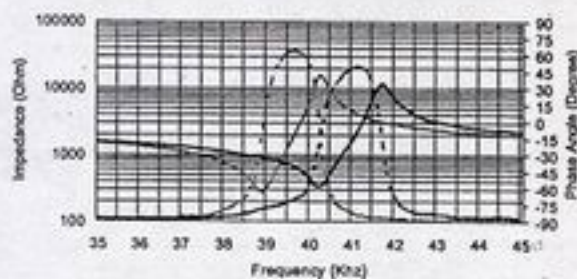


Sensitivity/Sound Pressure Level


Tested under 10Vrms @30cm

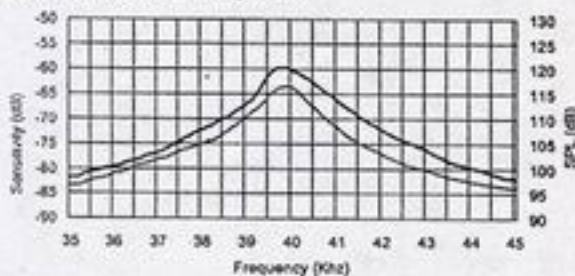


Beam Angle: Tested at 40.0Khz frequency

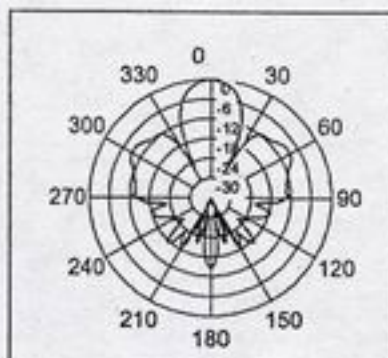


Sensitivity Variation vs. Loaded Resistor

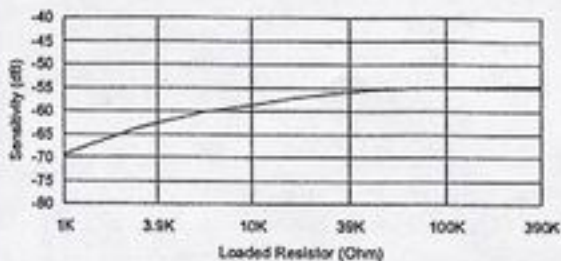


SPL Variation vs. Driving Voltage

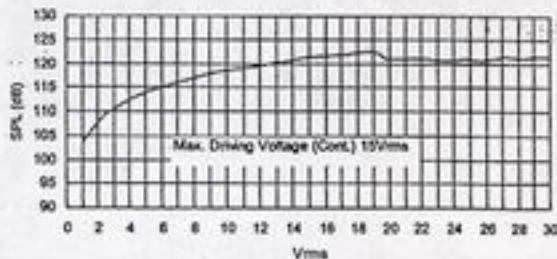


Center Frequency Shift vs. Loaded Resistor

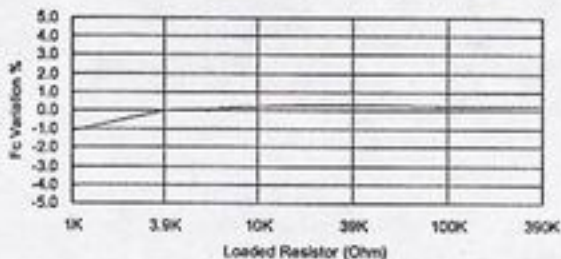


Center Frequency Shift vs. Driving Voltage

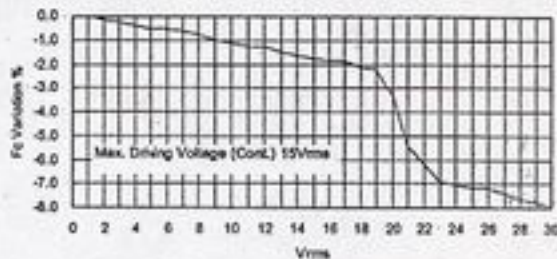


Sensitivity Variation vs. Temperature

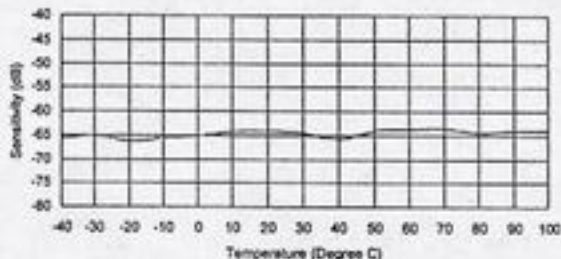


SPL Variation vs. Temperature

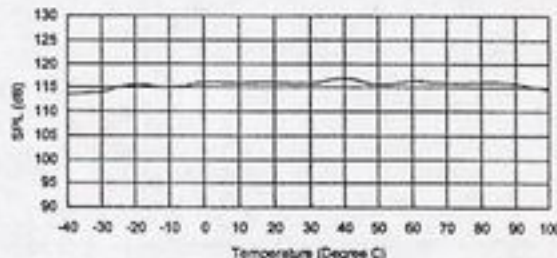



Center Frequency Shift vs. Temperature

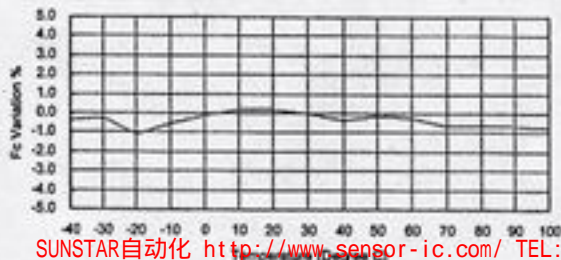

Center Frequency Shift vs. Temperature

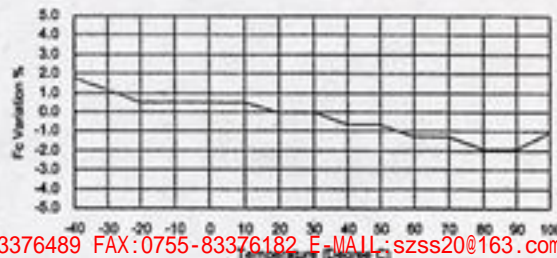

Dimensions: dimensions are in mm

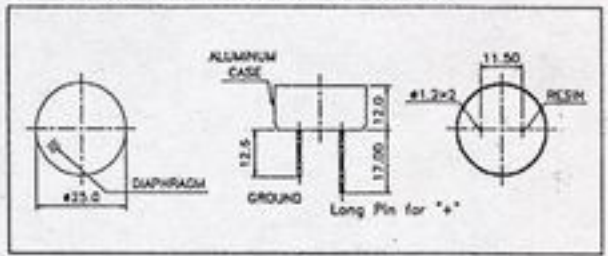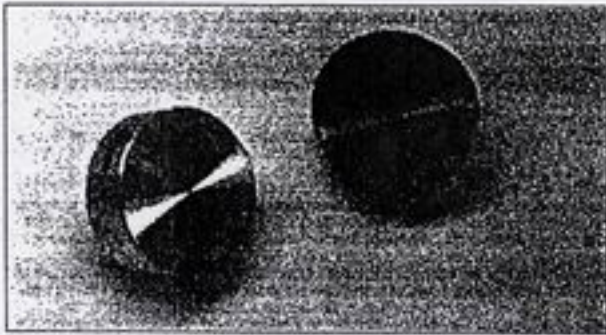

Specification

400ET250	Transmitter
400ER250	Receiver
Center Frequency	40.0±1.0Khz
Bandwidth (-6dB)	400ET250 1.0Khz
	400ER250 1.0Khz
Transmitting Sound Pressure Level	115dB min.
at 40.0Khz; 0dB re 0.0002μbar per 10Vrms at 30cm	
Receiving Sensitivity	-70dB min.
at 40.0Khz 0dB = 1 volt/μbar	
Capacitance at 1Khz	±20% 2400 pF
Max. Driving Voltage (cont.)	20Vrms
Total Beam Angle	-6dB 30° typical
Operation Temperature	-30 to 80°C
Storage Temperature	-40 to 85°C

All specification taken typical at 25°C
Closer frequency tolerance can be supplied upon request.

Model available:


1	400ET/R250	Aluminum Housing
2	400ET/R25B	Black Alum. Housing

P.31

Impedance/Phase Angle vs. Frequency


Tested under 1Vrms Oscillation Level

400ER250 Impedance _____
400ER250 Phase _____
400ET250 Impedance _____
400ET250 Phase _____

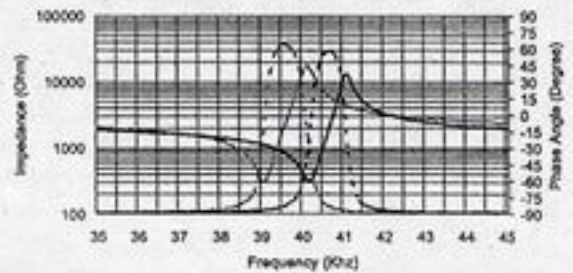


Sensitivity/Sound Pressure Level

Tested under 10Vrms @30cm


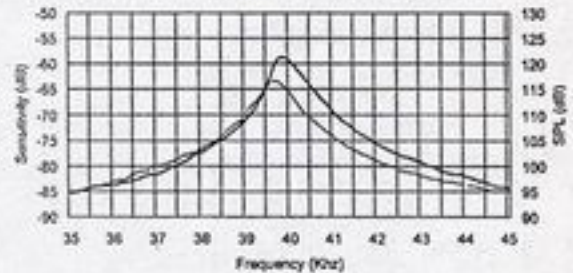


Beam Angle: Tested at 40.0Khz frequency

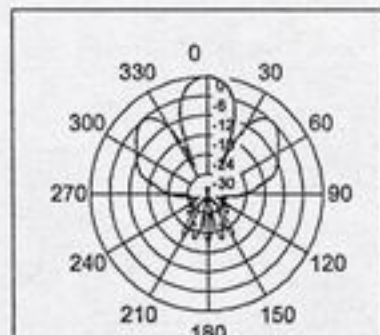



Sensitivity Variation vs. Loaded Resistor

SPL Variation vs. Driving Voltage

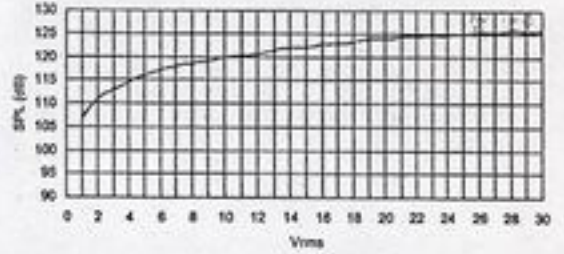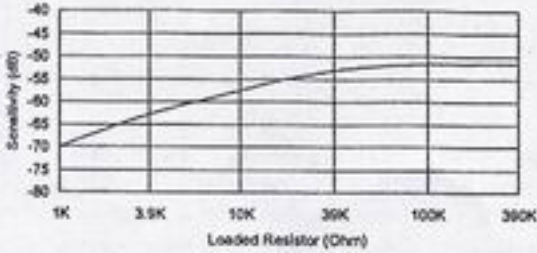



Center Frequency Shift vs. Loaded Resistor

Center Frequency Shift vs. Driving Voltage

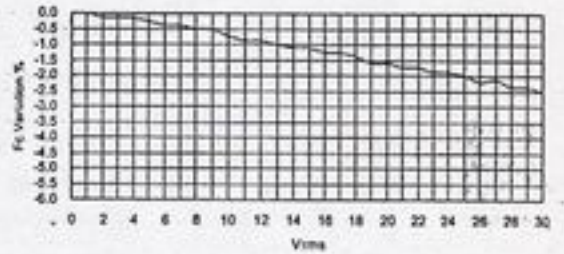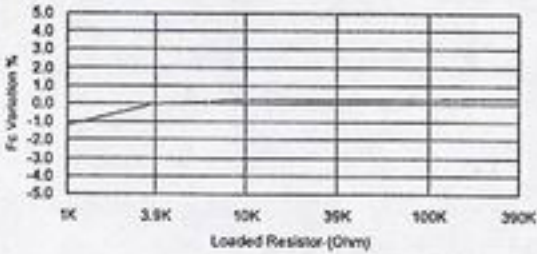



Sensitivity Variation vs. Temperature

SPL Variation vs. Temperature

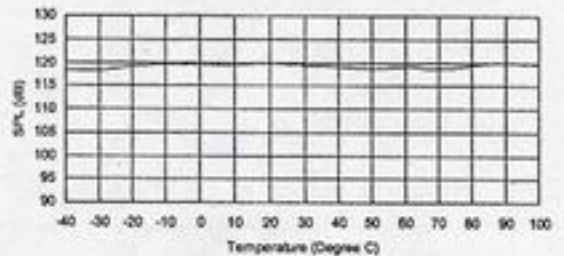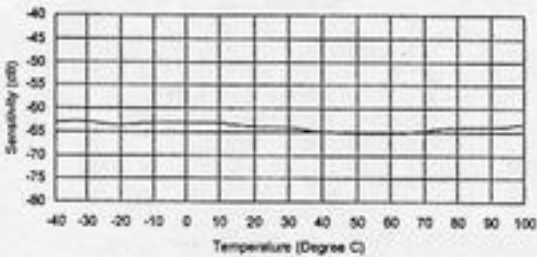

Center Frequency Shift vs. Temperature

Center Frequency Shift vs. Temperature

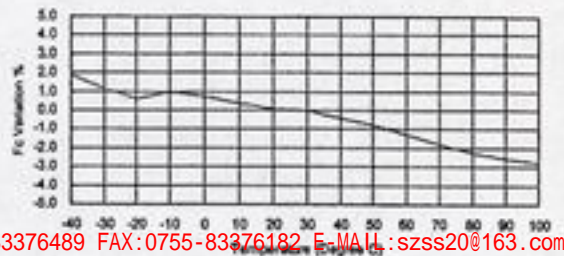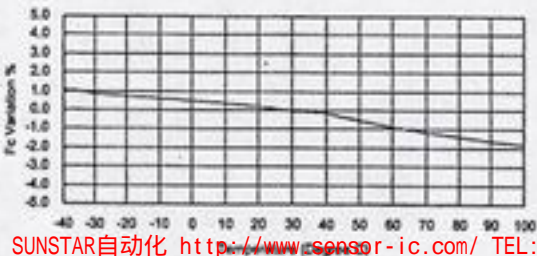

SUNSTAR商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——中国传感器科技信息网（全球传感器数据库）www.SENSOR-IC.COM 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到中国，共同开拓市场。本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学研究、产品设计、开发、生产制造的科技人员、管理人员、和采购人员提供满意服务。我公司专业生产、代理、经销、销售各种传感器、变送器、敏感元器件、开关、执行器、仪器仪表、自动化控制系统：专业从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达军工产品网：<http://www.junpinic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83607652 83376489 83376549 83370250 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS888@hotmail.com

邮编：518033 E-mail: szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382