

Magnetometers

HIGH SPEED DIGITAL ORIENTATION SENSOR

- ▼ High Resolution Flux Gate Magnetometers
- ▼ MEMS Accelerometers
- ▼ $\pm 1.5^\circ$ Accuracy in Azimuth (Heading)
- ▼ $\pm 0.5^\circ$ Accuracy in Inclination and Roll
- ▼ Accurately Senses Through All Orientations
- ▼ Computes Heading, Roll, & Pitch

Applications

- ▼ Magnetic Compassing for Land or Marine Use
- ▼ Vehicle Orientation
- ▼ Remotely Operated Vehicles
- ▼ Magnetic and Gravity Field Measurements



CXM543

The CXM543 Orientation Sensor is designed to measure the orientation (roll, inclination, and azimuth angles) of a platform or vehicle to which it is attached. The CXM543 determines the inclination and roll angles by using a 3-axis micro-machined accelerometer to measure the direction of earth's gravity. The azimuth angle is determined by measuring the earth's magnetic field using a 3-axis magnetometer subsystem.

The CXM543 employs a high-speed serial digital output for transmitting data. Both RS-232 and TTL level interfaces are present. Baud rate is user selectable over the range 300 baud to 72,800 baud.


The CXM543 has an internal hard-iron calibration firmware program. This allows the CXM543 to measure heading in the presence of hard-iron interference.

The CXM543 can be configured to operate in either a command (polled) mode (where an external computer

requests data) or an auto send (continuous) mode (where data is automatically sent repeatedly after power up). Output data can be set to ASCII format (ideal when using a PC) or in binary format (more suited to a microprocessor interface).


The CXM543 can be configured to output either orientation angle data (roll, inclination, and azimuth) or sensor data (AX, AY, AZ, MX, MY, MZ). When used in orientation mode, the accuracy of the transmitted angles is $\pm 1.5^\circ$ for azimuth and $\pm 0.5^\circ$ for roll and inclination. Angular resolution is better than $\pm 0.1^\circ$. When used as a gravity sensor, accuracy is ± 8.5 mg and resolution is better than 1 mg. As a magnetic field sensor, the CXM543 fluxgate magnetometers have an accuracy of $\pm 0.1 \mu\text{T}$ and a resolution of $\pm 0.005 \mu\text{T}$.

A Windows compatible program is available with the CXM543 to enable system configuration (e.g., baud rate, sample rate, mode, etc.), data acquisition, and display.

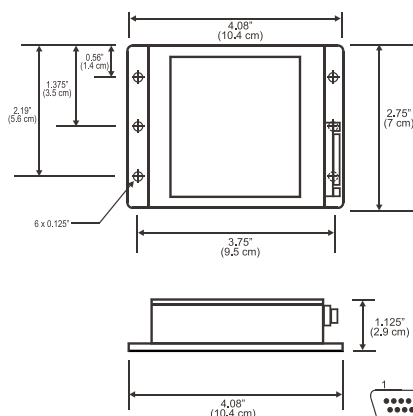

Specifications	CMX543
Performance	
Angular Accuracy	
Inclination & Roll (°)	± 0.5
Azimuth (°)	± 1.5
Accelerometer Bias (mg)	± 8.5
Magnetic (μT)	± 0.1
Angular Range	
Inclination (°)	± 90
Roll (°)	± 180
Azimuth (°)	± 180
Gravity Range (g)	± 1
Magnetic Range (μT)	± 100 (± 1 Gauss)
Linearity (% full scale)	± 0.1
Sensor Axes Alignment to Case (°)	± 0.5
Data Output Rate (angles mode) (Hz)	100
Environment	
Operating Temperature Range (°C)	0 to + 50
Data Levels	RS-232 and TTL
Electrical	
Baud Rate (user selectable)	300 - 72,800
Power Input	100 mA @ +7.5 to +15 VDC
Physical	
Size	2.75" W x 4.08" L x 1.125" H (7 cm x 10.4 cm x 2.9 cm)
Connector	9-pin non-magnetic "D"
Weight (grams)	200

Specifications subject to change without notice

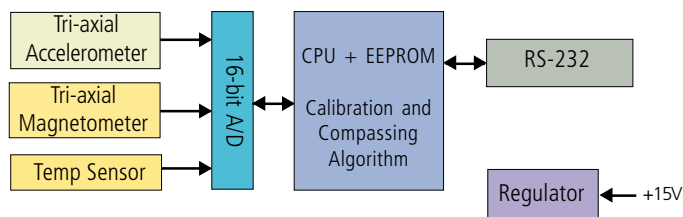

543 Digital Orientation/Compass Sensor



Pin	Function
2	RS 232 out
3	RS 232 in
5	Ground
6	TTL serial out
7	TTL serial in
8	Configure
9	+7.5 to +15V DC

Pin Diagram

Ordering Information

Model	Description
CMX543	High Speed Digital Orientation Sensor

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382