



LP 8000 Series

Low Differential Pressure Sensors

- Ranges from 10mbar to 10 bar
- Accuracy better than 0.25% FS BSL
- Line pressure from vacuum to 100 bar
- Uni-directional or bi-directional operation
- Excellent thermal and long term stability
- Full wet/wet media compatibility



The LP 8000 series accurately measure low differential or relative pressures of gases and liquids from 10mbar to 10 bar full scale. With a choice of current or voltage output, they are suitable for uni-directional (e.g. 0 to 20mbar) or bi-directional (e.g. -20 to 20mbar) pressure measurements.

An innovative eddy current measurement system enables the use of low displacement sensor diaphragms operating well within elasticity limits. In addition, the "dry cell" sensor concept means no internal fluid is used. Combined with a rugged design, this ensures high performance with long term reliability, even when operating over a wide temperature range.

The LP 8000 series are therefore ideally suited to a wide range of high precision applications including flow of liquids and gases, level measurement in pressurised tanks, leak detection and filter monitoring amongst many others.

LP 8000 Series



Low Differential Pressure Sensors

STANDARD SPECIFICATIONS

Pressure Measurement

Operating Pressure Ranges

Range (mbar)	10	20	50	100	200	500
Overpressure (bar)	1	2	3	5	7	10

Range (bar)	1	2	5	10
Overpressure (bar)	25	40	40	50

For other ranges, please refer to manufacturer. Sensors may be calibrated in other pressure units - please specify.

Zero & Span Adjustment

Site adjustable potentiometer trim
Zero: -15 to 15% F.S.
Span: 33 to 100% F.S.

Line Pressure

Vacuum to 100 bar.

Pressure Media

Fluids compatible with either:-
(A) 316L stainless steel, X750/600 Inconel and Viton.
(B) 316L stainless steel, beryllium copper, brass, soft soldering and Viton.

Supply Voltage

10 - 30 Vd.c.
15 - 30 Vd.c. (LPM with 0 - 10 Vd.c. output)
±12 Vd.c. (LPM with 0 ±5 Vd.c. output).

Output Voltage

LPX (uni-directional): 4 - 20mA (2 wire)
LPX (bi-directional): 12mA ±8mA (2 wire)
LPM (uni-directional): 0 - 5 Vd.c. (3 wire)
0 - 10 Vd.c. (3 wire)
LPM (bi-directional): 2.5 ±2.5V (3 wire)
5 ±5V (3 wire).

Load Impedance

LPX: 0.05 (Vsupply - 10) kΩ maximum.
LPM: 1kΩ minimum.

Performance

Accuracy

Combined Non-linearity, Hysteresis and Repeatability: ±0.25% F.S. BSL maximum.

Long Term Stability

At standard reference conditions, calibration will not change by more than 0.3% F.S./annum.

Temperature Range

Ambient: -40° to 100°C
Process Media: -40° to 120°C
Storage: -50° to 110°C

Temperature Effects

Output deviation over -20° to 80°C will not exceed the following values:-
Zero: 0.01% F.S./°C
Span: 0.01% F.S./°C

Mounting Position Effect

No effect on span. Possible zero shift can be corrected via the adjustment potentiometer.

Supply Sensitivity

0.01% F.S./Volt maximum.

Humidity

Up to 100% RH non-condensing.

Response Time

10msec (standard setting) up to 2 seconds.
N.B. NOT user adjustable - must be specified as ordering information.

Physical

Pressure Connections

G¹/₈ female.

Purge Ports

G¹/₈ female.

Purge Screws

316L stainless steel.

Electrical Connection

Screw terminal block under cover plate.
Maximum wire area 4mm² via PG7 gland (cable diameter 4 to 7mm).

Housing Material

316L stainless steel.
Environmental Protection: IP66.

CE Conformity

EMC Emissions: EN50081-1
EMC Immunity: EN50082-1
Certification: CE marked.

Weight

1.5Kg nominal.

OPTIONS

- (A) Panel Mounting Bracket
- (B) Calibration Certificate
- (C) Response Time: Any value 10msec - 2 sec

RELATED PRODUCTS

Druck manufacture a comprehensive range of pressure transducers, transmitters, indicators, controllers, deadweight testers and calibrators. The range of portable calibrators also covers temperature and electrical parameters. Please refer to manufacturer for further information and data sheets.

CALIBRATION STANDARDS

Instruments manufactured by Druck Limited are calibrated against precision pressure calibration equipment which is traceable to International Standards.

ORDERING INFORMATION


- (1) Select model number:

Code	Model
LPX	Current Output
LPM	Voltage Output
	Code
	8 Base Model
	Code Diaphragm Material
	3 Inconel X750
	4 Beryllium copper
	Code Electrical Connection
	8 Cable gland, PG7
	Code Temp. Comp
	1 -20° to 80°C
LPX	8 4 8 1

- (2) State minimum and maximum pressure and corresponding output signal.
(3) State options (if required).

Continuing development sometimes necessitates specification changes without notice.

INSTALLATION DRAWINGS - Dimensions in mm

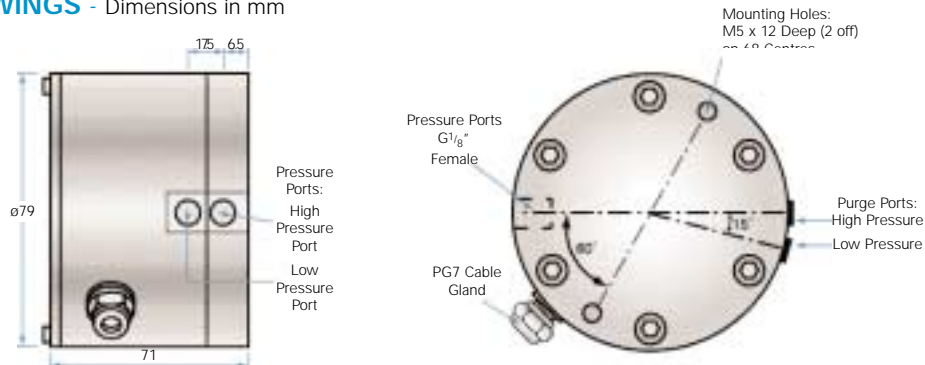

Druck Limited

Fir Tree Lane, Groby
Leicester, LE6 0FH, England

Tel: +44 (0) 116 231 7100
Fax: +44 (0) 116 231 7103
E-Mail: sales@druck.com
Internet: www.druck.com



Agent:

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382