

PMP 317

PMP 317 Series

Automotive Pressure Transducers

- Ranges from 100 mbar to 700 bar
- $\pm 0.15\%$ accuracy
- Wide temperature range
- 400% overpressure
- Compact and rugged design
- Low power consumption



The PMP 317 series has been designed to withstand the extreme temperature, vibration and shock levels of automotive test applications. A micromachined silicon sensing element is mounted within a high integrity pressure module constructed from stainless steel 316L and Hastelloy C276. This provides hostile media compatibility, high overpressure and burst ratings.

The temperature compensated signal is a customer specific high level output voltage ideal for interfacing with data acquisition hardware. Pressure and electrical interfaces can also be selected by the customer.

The PMP 317 series can be powered directly from the vehicle battery, even during the start cycle. It is suitable for measurements where temperature cannot be controlled and reliable high performance measurement is required. Applications include fuel system, transmission, manifold and turbo pressure, air conditioning, braking system and crankcase pressures.

PMP 317 Series



Automotive Pressure Transducers

STANDARD SPECIFICATION

Pressure Measurement

Operating Pressure Ranges

Any zero based pressure range between
100 mbar to 60 bar gauge
350 mbar to 700 bar absolute
60 bar to 700 bar sealed gauge

Bi-directional gauge and compound ranges available

Other engineering units can be specified

Overpressure

The rated pressure range can be exceeded by the following multiples with negligible effect on calibration
4 x FS up to 60 bar(200 bar maximum)
2 x FS above 60 bar(900 bar maximum)

Media Compatibility

Fluids compatible with Stainless Steel 316L and Hastelloy C276

Excitation Voltage

7 to 30 Vdc (<2mA at no load)

Output Voltage

3 Wire: 1 to 6 Volts
4 Wire: 0 to 5 Volts

Alternatives available - refer to Druck

Performance Specification

Accuracy

±0.15 % FS BSL combined effects of non-linearity, hysteresis and repeatability

Zero Offset & Span Setting

± 1 % FS

Long Term Stability

Less than 0.1% FS per annum

Operating Temperature Range

-55° to +125°C

Temperature Effects

±1.5% FS TEB over -40 to +125°C

Insulation Resistance

Greater than 100MΩ at 500Vdc

Acceleration Sensitivity

Typically 0.02% FS/g for 350 mbar and below, decreasing to 0.0003% FS/g for ranges above 60 bar, along the sensitive axis

Mechanical Shock

1000g, 1mS half sine pulse in each of three mutually perpendicular axes will not affect performance

Vibration

Response less than 0.05% FS/g at 30g peak 10Hz to 2kHz, limited by 12mm double amplitude

Safety

CE marked
EMC emissions: BS 50081-1
EMC immunity: BS 50082-2

Physical Specification

Weight
120 grams nominal

Pressure Connection

100mbar to 60 bar ranges

Male:-

G1/8B (60° Int cone)
G1/4B (60° Int cone or flat end)
1/4" NPT
7/16" UNF to MS33656-4
M10 x 1
Bulkhead fittings

Female:-
G1/4
1/4" NPT

Others available - refer to Druck

Above 60 bar to 700 bar ranges

G1/4 female

Adaptors available - refer to options

Electrical Connection

MIL-C-26482 6 pin bayonet plug or 4 core PTFE shielded cable(1m supplied as standard)
Alternatives available - refer to Druck

OPTIONS

- (A) Mating connector for bayonet plug
- (B) Male/male pressure adaptors for ranges above 60 bar. Specify thread required
- (C) Additional PTFE cable (length to be specified)

CALIBRATION STANDARDS


Pressure transducers manufactured by Druck are calibrated against precision pressure calibration equipment which is traceable to international standards.
Statement of conformity supplied as standard

ORDERING INFORMATION

- Please state the following
- (1) Model number (PMP 317)
 - (2) Pressure range and units
 - (3) Gauge, sealed gauge or absolute
 - (4) Output voltage (3 or 4 wire)
 - (5) Pressure connection
 - (6) Electrical connection
 - (7) Options (if required)

Continuing development sometimes necessitates specification changes without notice

INSTALLATION DRAWINGS - Dimensions mm

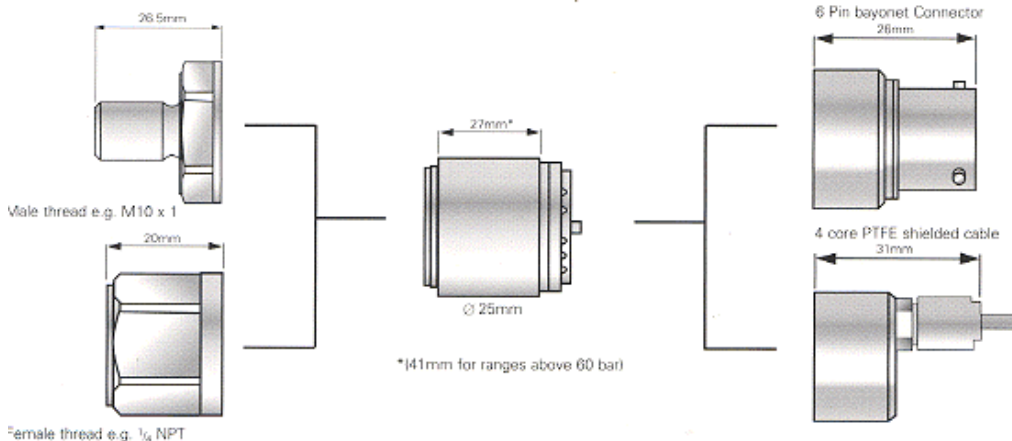

Druck Limited
Fir Tree Lane, Groby
Leicester, LE6 0FH

Tel: +44 (0) 116 231 7100
Fax: +44(0) 116 231 7103
E-mail: sales@druck.com
Internet: www.druck.com



Agent

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382