


UPS - II

Smart loop calibrator for milliamps

- Sources and reads milliamps
- Simulates 2-wire transmitters
- Powers and reads 2-wire transmitters
- Reads and simulates dp-transmitters in percentage of flow
- Fixed calibration currents
- Auto-stepping for handsfree calibration
- Auto-ramp cycling for endurance tests
- Fixed currents for valve stroking

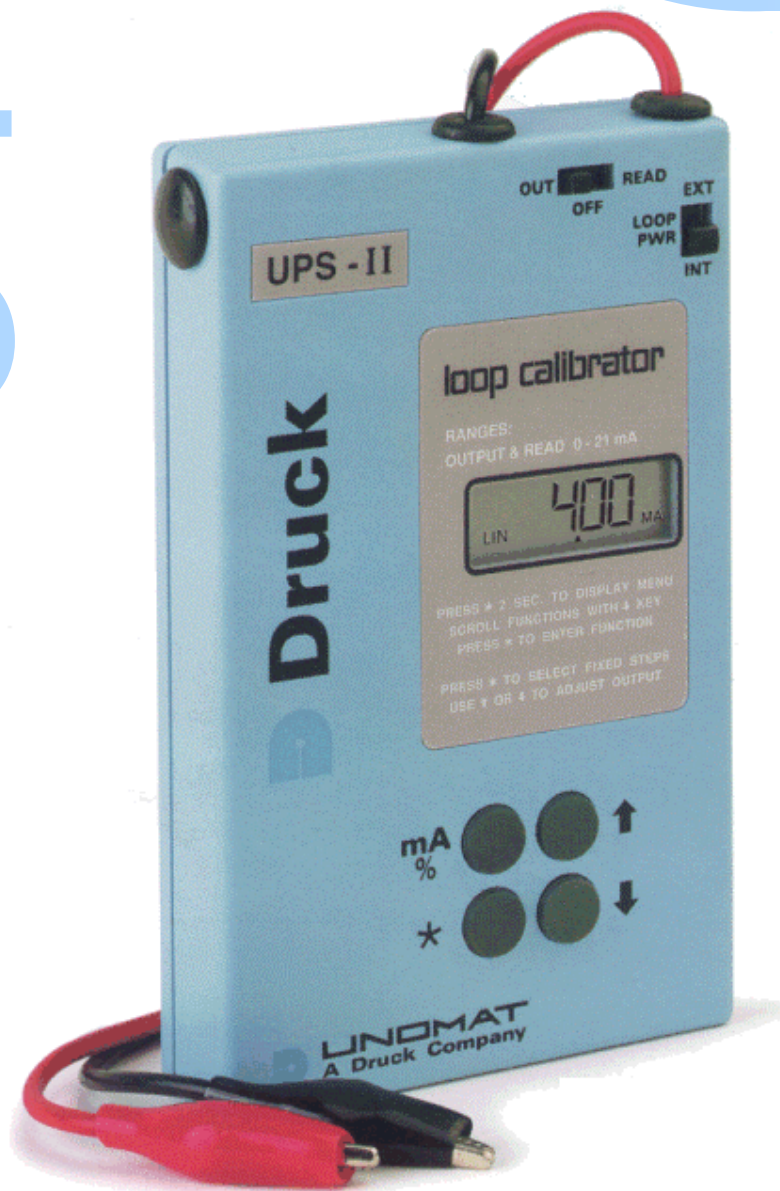

UPS - II



Specifications

SPECIFICATIONS

Output range
0-21.00 mA

Input range
0-21.00mA

Accuracy
0.05% of range

Resolution
10 microamps

Temperature effect
0.003% /°C, 0.0015% /°F

Internal loop power
24 VDC stabilized

External loop power
56 VDC max.

Measurement input
12 Ohms including fuse

Drive capability
900 Ohms

Operating temperature
-10°C to +50°C, 14°F to 122°F

Battery life
Sources 12 mA :13 hours
Measures :64 hours

Batteries
4x R6, AA (Penlite)

Loop mismatch
Flashes "LOOP"

Low battery
Flashes "LOBAT"

Overrange
Flashes "EEEE"

Reversed polarity
Flashes "POL"

Adaptor line/6 VDC
P/N 13600 230V/50Hz
P/N 13602 110V/60Hz

Housing
High impact ABS

Size
3" x 5" x 0.83"
77 x 124 x 21mm

Weight
285 grams/9oz
Including batteries

The UPS-II can power (24VDC) and read 2-wire transmitters to perform field calibrations. Output currents are adjustable to a resolution of 10 microamps in both source and transmitter simulation modes.

FIXED STEPS

The calibration can source or stimulate fixed calibration currents to test or calibrate receivers and to stroke valves. Different current levels are available from the menu.

4-20mA linear	4	8	12	16	20mA		
0-20mA linear	0	5	10	15	20mA		
4-20mA sq.rt (flow)	4	5	8	13	20mA		
0-20mA sq.rt (flow)	0	1.25	5	11.25	20mA		
4-20mA valve	3.8	4	4.2	12	19	20	21mA

Output currents can be changed manually or automatically. The time between steps is 10 seconds in the auto-stepping mode. In the valve mode, auto-stepping will be:

3.8 - 4 - 4.2 or 19 - 20 - 21mA

RAMPING

The calibrator can source or simulate with high resolution a continuous up/down cycle between 4 and 20mA or 0 and 20mA. The travel time between limits is 60 seconds.

READING IN PERCENTAGE






The calibrator can display readings in percentage of a 4-20mA or 0-20mA span and can also read or simulate dP-transmitters directly in percentage of flow.

ORDERING INFORMATION

Model UPS-II (includes carrying case, set of batteries, instruction guide and spare fuse).

Optional line adaptor:

230V/50Hz Part No. 13600
110V/60Hz Part No. 13602

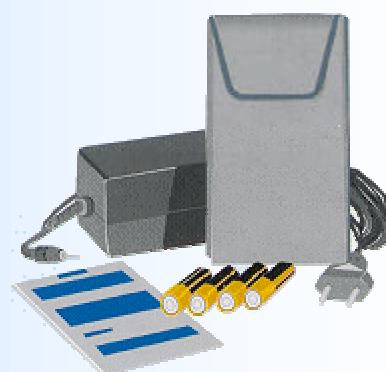

Continuing development sometimes necessitates specification changes without notice.



Druck Limited
Fir Tree Lane, Groby
Leicester LE6 0FH England
Tel: +44 (0) 116 231 7100
Fax: +44(0) 116 231 7103
E-mail: sales@druck.com
Internet: www.druck.com

Agent

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382