


PC Board Mountable Accelerometer
0.5 to 4.5 VDC Output
Integral Temperature Compensated
Low Cost

- ▶ Frontal Impact Air Bag Systems
- ▶ Side Impact Air Bag Systems
- ▶ Vibration/Shock Monitoring
- ▶ Crash Recorder
- ▶ Aerospace

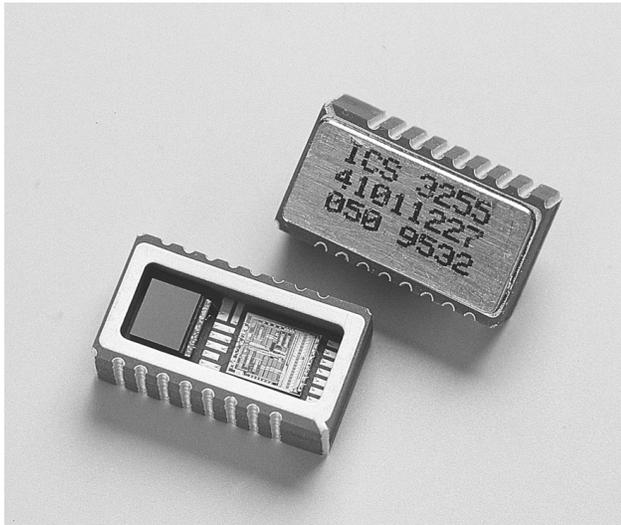

DESCRIPTION

The Model 3255 is a two-chip accelerometer designed for low cost surface mount applications. The package can be mounted in one of two orientations, allowing the measurement axis to be either parallel or perpendicular to the mounting surface without the use of costly brackets.

This accelerometer consists of a micro machined silicon mass suspended by multiple beams from a silicon frame. Piezoresistors located in the beams change their resistance as the motion of the suspended mass changes the strain in the beams. Silicon caps on the top and bottom of the device are added to provide over-range stops. This design provides for a very low profile, high shock resistance, durability and built-in damping over a wide usable bandwidth. Each sensor is individually serialized.

A patented self-test feature is also built into the sensor. By applying a voltage to the self-test pin, an electrostatic force is created that attracts the seismic mass towards the top cap, simulating an acceleration and allowing proper sensor function to be verified.


FEATURES

- ▶ Surface Mount Package
- ▶ $\pm 0.5\%$ Non-linearity (typical)
- ▶ Self Test Function
- ▶ DC Response
- ▶ Built-in Damping
- ▶ Built-in Overrange Stops

STANDARD RANGES

Range	g
± 25	●
± 50	●
± 100	●
± 250	●
± 500	●

DIMENSIONS

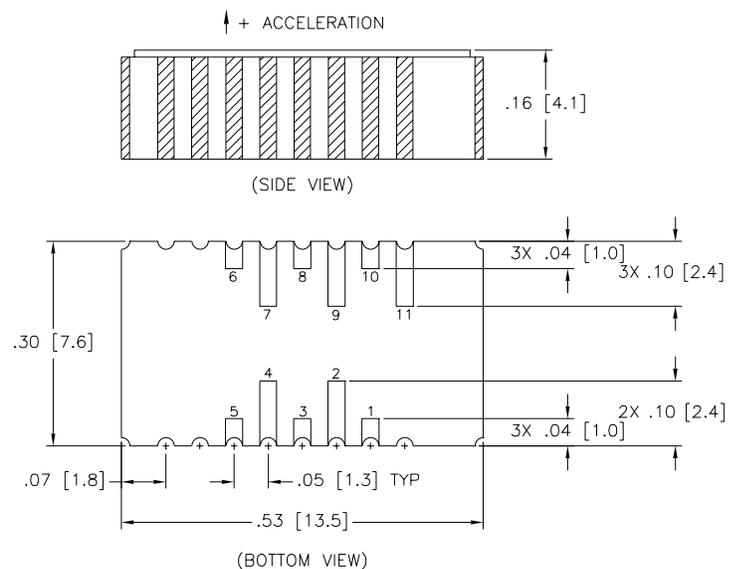

PERFORMANCE SPECIFICATIONS

Supply Current: 5.0 VDC

Ambient Temperature: 25°C (Unless otherwise specified)

PARAMETERS	RANGE			UNITS	NOTES
	±25G	±50G	±100G		
Bandwidth (MIN)	0-2000	0-2000	0-2000	Hz	8
Sensitivity (MIN / TYP/ MAX)	76.0/80.0/84.0	38.0/40.0/42.0	19.0/20.0/21.0	mV/g	1, 4

PARAMETERS	RANGE		UNITS	NOTES
	±250G	±500G		
Bandwidth (MIN)	0-3000	0-3000	Hz	8
Sensitivity (MIN / TYP/ MAX)	7.6/8.0/8.4	3.8/4.0/4.2	mV/g	1, 4

PARAMETERS	ALL RANGES			UNITS	NOTES
	MIN	TYP	MAX		
Zero Acceleration Output	2.3	2.5	2.7	Volts	1, 4
Non-Linearity		0.2	1.0	±% Span	2
Transverse Sensitivity		1	3	±% Span	
Supply Voltage	4.5	5.0	7.0	Volts	3
Supply Current			10	mA	
Output Noise		10		µV p-p	5
Self-Test Input Voltage	-30		0	Volts	6, 7
Self-Test Response (Vst = -5V)	-0.89	-1.48	-2.07	G	6, 7
Self-Test Input Current (Vst = -5V)			0.1	mA	6, 7
Self-Test Accuracy	-5		5	%	4, 6, 7
Output Source Current (load to ground)	1.0			mA	
Output Sink Current (supply to load)	0.5			mA	
Acceleration Limits			2000	G	
Operating Temperature	-40°C to +85°C				
Storage Temperature	-40°C to +125°C				
Weight	1.5 Grams				

Notes

- The output voltage increases from the Zero Acceleration Output for positive acceleration and decreases for negative acceleration.
- Best Fit Straight Line.
- Output is ratio metric with supply voltage in the range of (5.0 ± 0.5) V.
- Includes effects over operating temperature range.
- 1 Hz to 10 kHz.
- Applying the self-test input voltage simulates an acceleration. The sensor output is proportional to the square of the voltage difference between the self-test input and the positive supply. When not using the self-test function, the self-test input pin should be connected to the positive supply voltage. For detailed description refer to Technical Note TNO10.
- Self-test input voltage is with respect to supply voltage. For example, if supply voltage is 5 VDC then Vst = -5 V is equivalent to ground.
- The useful frequency range is defined as the range of frequencies over which the device sensitivity is within ±5% of the DC value.
- The alarm output is a digital output which is 0 V during normal operation and 5 V when the output voltage of the accelerometer die is outside the normal range. This is the case if there is a malfunction of the accelerometer or a broken wire bond to the sensor.

ORDERING INFORMATION

3255 - 050



CONNECTIONS

PAD	FUNCTION
1	Alarm Function
2	Signal Output
3	Ground
4	+5V Supply
5	Self Test
6 thru 11	No Electrical Connection

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382