

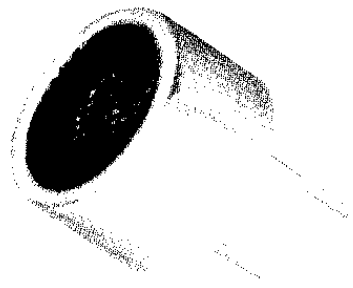



QSC-12B SERIES

Model No	QSC-12B
Centre Frequency	40 ± 2KHz
Free Capacitance	2500 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	6g




Color White
Material: Housing: Plastic
PC: Aluminum

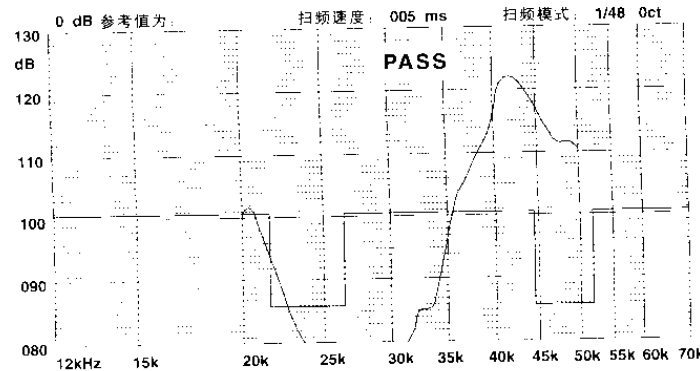




Color White
Material: Housing: Plastic
PC: Aluminum

QSC-16A SERIES

Model No	QSC-16A
Centre Frequency	25 ± 2KHz
Free Capacitance	3000 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	8g




Color White
Material: Housing: Plastic
PC: Aluminum

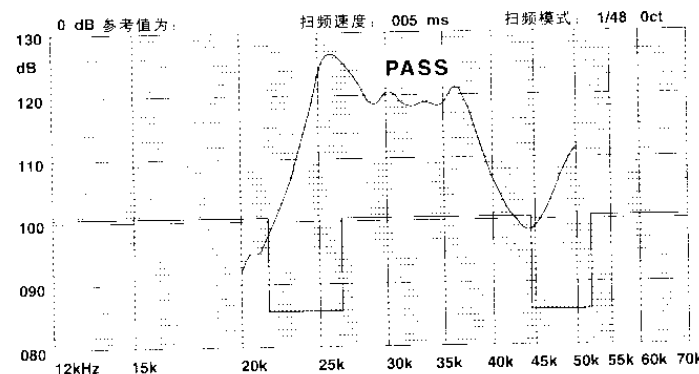




Color White
Material: Housing: Plastic
PC: Aluminum

QSC-16B SERIES

Model No	QSC-16B
Centre Frequency	40 ± 2KHz
Free Capacitance	3000 ± 20%pF
Min.Sound Pressure Level	≥110dB/10Vrms/50cm
Sensitivity	-75dB min.
Operating Temperature	-40 ℃~+80 ℃
Material	Aluminium
Weight	8g



Color White
Material: Housing: Plastic
PC: Aluminum

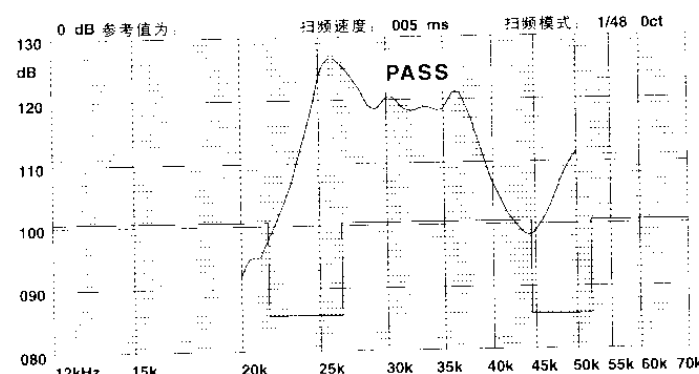

Color White
Material: Housing: Plastic
PC: Aluminum