





Tactile Switches 6mm × 6mm Radial Taped Side Push

■ Features

- Reliable contact by proprietary contact construction
- Crisp clicking by tactile feedback
- Unique design and insert moulded terminal against the flux rise
- Anti-sulfide terminal
- Radial taping for auto insertion and dip soldering



■ Dimensions (Unit: mm)

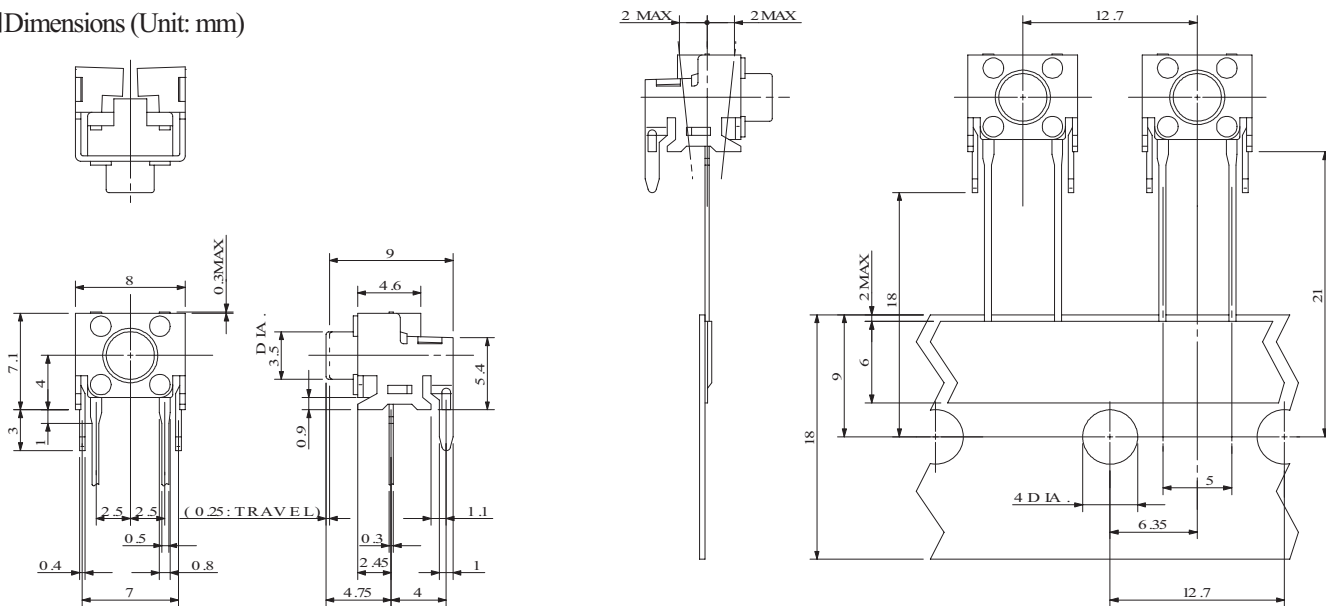

■ Specification

Item	Specification	Unit	Note
Operating Temperature Range	-25~+70	°C	
Storage Temperature Range	-40~+85	°C	
Type of Operation	Tactile Feedback		
Contact Configuration	Push-On Momentary, 1 Pole-1 Throw		
Power Rating	Max. 20mA 15VDC		
Contact Resistance	Max. 100	mΩ	
Insulation Resistance	100M Ω Min. at 100VDC		
Dielectric Withstand Voltage	250 VAC for 1 Minute		
Contact Bounce	Max. 5	ms	
Operating Force	0.98±0.49	N	A Type
Operating Force	1.57±0.49	N	B Type
Return Force	Min. 0.10	N	A Type
Return Force	Min. 0.49	N	B Type
Travel	0.25 -0.1/+0.2	mm	

■ Model Designation

