

K-Shear[®] Accelerometer

Type 8704B5000

Dual-Purpose, Voltage Mode Accelerometer

Rugged light weight dual purpose accelerometer measures vibration or mechanical shock in wide range of applications. High level vibration measurements or impulse/impact levels up to 5 000 g can be made with this all welded, hermetically sealed accelerometer.

- Low impedance, voltage mode
- Quartz-shear sensing elements
- Ultra-low base strain
- Ultra low thermal transient response
- Hermetically sealed
- Conforming to CE


Description

The accelerometer Type 8704B5000 accurately measures mechanical shock or vibration up to 5 000 g. The unique K-Shear sensing system is insensitive to base strain, transverse acceleration and thermal transients. Quartz shear cut, sensing crystals ensure long-term stability not achievable with other sensing materials. The sensor is constructed in a hermetically sealed, welded, titanium case. The 10-32 thread top connector features a robust design to provide years of reliable operation under conditions where repeated shock and vibration is encountered.

The built-in Piezotron[®] electronic impedance converter, provides a high signal level at a low impedance output allowing the use of inexpensive coaxial cable. The accelerometer can be powered by a Kistler 5100 series coupler/signal conditioner or by any industry standard IEPE (Integrated Electronic Piezo-Electric) sensor power source.

Application

The Type 8704B5000 can be used for general purpose vibration measurements in a laboratory or for environmental product shock testing in vehicle, automotive, metal-to-metal impacting, shipping package design and survivability.

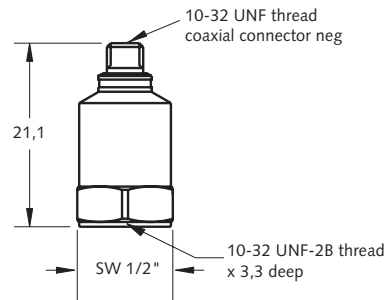

Mounting

A threaded 10-32 UNF stud provides positive attachment of the accelerometer to the test structure. Reliable and accurate measurements require that the mounting surface be clean and flat. The operating instruction manual for the accelerometer Type 8704B5000 provides detailed information regarding mounting surface preparation.

Technical Data

Specification	Unit	Type 8704B5000
Acceleration range	g	±5 000
Overload	gpk	±10 000
Threshold (noise, 130 µVrms), nom.	grms	0,13
Sensitivity, ±5 %	mV/g	1
Resonant frequency mounted, nom.	kHz	54
Frequency response, ±5 %	Hz	1 ... 10 000
Amplitude non-linearity	%FSO	±1
Time constant, nom.	s	1,5
Transverse sensitivity, nom. (max. 3)	%	1,5

Environmental

Base strain sensitivity @ 250 µε	g/µε	0,01
Shock limit (1 ms pulse)	gpk	10 000
Temperature coefficient of sensitivity	%/°C	-0,06
Operating temperature range	°C	-55 ... 120
Storage temperature range	°C	-75 ... 150

Output

Bias, nom.	VDC	11
Impedance	Ω	<100
Voltage full scale	V	±5
Current	mA	2

Source

Voltage	VDC	20 ... 30
Constant current	mA	2 ... 20
Impedance, min.	kΩ	100

Construction

Sensing element	Type	quartz-shear
Case/base	material	Titanium
Degree of protection case/connector (EN 60529)		IP68
Connector	Type	10-32 neg.
Ground isolated		with pad
Mass	grams	7,1
Mounting (10-32 thd.x3,3)	Type	stud

1 g = 9,80665 m/s², 1 Inch = 25,4 mm, 1 gram = 0,03527 oz, 1 lbf-in = 0,113 N·m

Included Accessories

- 10-32 mounting stud Type 8402
- Mounting stud, 10-32 to M6; shipped only outside N.A. 8411

Ordering Key


Range

±5 000 g	5000
----------	------

Type 8704B

Measuring Chain

- 1 Low impedance sensor Type 87...
- 2 Sensor cable, 10-32 pos. to BNC pos. 1761B...
- 3 Power supply/signal conditioner 51...
- 4 Output cable, BNC pos. to BNC pos. 1511



8704B_000-240e-05.08