

Sacroiliac Load Cell

Type M5670BA...

Twelve-axial

Type M5670BA... is designed to measure forces and moments in the sacroiliac of the crash test dummy WorldSID.

- Twelve-axial (F_x , F_y , F_z , M_x , M_y , M_z , left and right each)
- 350/700 Ω measuring bridge
- ID module available
- Low linearity errors and hysteresis errors
- Kistler system cabling
- Polarities according to SAE J211/1



Description

The load cell is made of elements on which forces are transmitted. The mechanical deformation element, applied with strain gage, serves for mechanical electrical deformation. The forces to be measured create mechanical stretches and buckling in the gaging member.

In order to avoid linearity errors, the deformation paths are constructively held small (high stiffness); thus a proportional behavior is realized. The force and moment proportional resistance variations are measured by a Wheatstone-type bridge circuit.

Line-up of equivalent load cells:

	Type
Kistler	M5670BA...
Denton	W50-71130

The load cell is available with ID modules, either a UPS module (Universal Parameter Memory) or a Dallas module can be chosen for this functionality. These modules are integrated in an external housing in the wiring or in the connector. Customized cable lengths and connectors with specific pin assignments are optionally available.

Technical Data

Axial Data		F_x	F_y	F_z	M_x	M_y	M_z
Measuring range	kN	6	12	6			
	N·m				1 000	400	400
Bridge output voltage (typ.)	mV/V	1,95	1,38	1,95	2,6	2	1
Sensitivity (typ.)	$\mu\text{V/V/kN}$	325	115	325			
	$\mu\text{V/V/N·m}$				2,6	5	2,5
Bridge resistance	Ω	350	700	350	700	700	700
Ultimate load, static	%	150	150	150	150	150	150

General Data

Supply voltage		
without ID module	VDC	5 ... 15
with ID module	VDC	9 ... 12
Insulation resistance ¹⁾	M Ω	>90
Operating temperature range	$^{\circ}\text{C}$	-20 ... 80
Storage temperature range	$^{\circ}\text{C}$	-30 ... 90
Amplitude non-linearity (typ.)	%	<1
Hysteresis (typ.)	%	<1
Channel cross talk	%	<5
Bridge zero output (typ./max.)	mV/V	0,02/0,03
Weight (without cable)	grams	1 070

All specifications are typical at 25 $^{\circ}\text{C}$ and rated at 10 V sensor supply voltage, unless otherwise specified.

¹⁾ All wires to screen (GND), measured with 10 VDC

M5670BA_000-965e-12.11

This information corresponds to the current state of knowledge. Kistler reserves the right to make technical changes. Liability for consequential damage resulting from the use of Kistler products is excluded.

©2011, Kistler Group, Eulachstrasse 22, 8408 Winterthur, Switzerland
Tel. +41 52 224 11 11, Fax +41 52 224 14 14, info@kistler.com, www.kistler.com
Kistler is a registered trademark of Kistler Holding AG.

Application

Type M5670BA... is designed to measure forces and moments in the sacroiliac of the crash test dummy WorldSID.

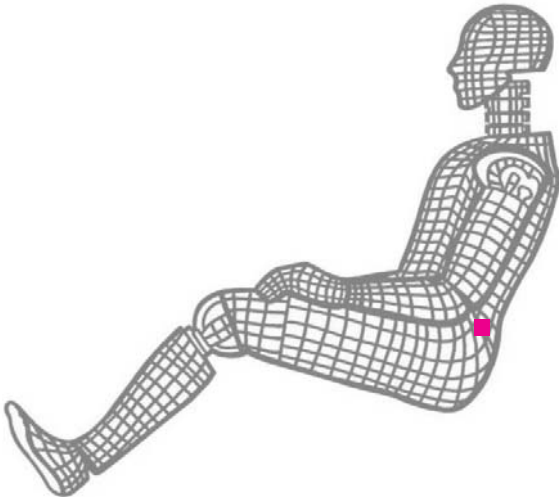


Fig. 1: Dummy application, location sacroiliac

Ordering Key

Type M5670BA

Design

Standard	HM
----------	----

Cable Length before Electronics

0 cm	00
<10 cm (digit x 1 cm)	C#
10 cm ... 9,9 m (digit x 10 cm)	##
10 m ... 90 m (digit x 10 m)	D#

Additional Electronics

Sensor detail, as per type declaration force-moment TP-650-2	#
--	---

Cable Length after Electronics

0 cm	00
<10 cm (digit x 1 cm)	C#
10 cm ... 9,9 m (digit x 10 cm)	##
10 m ... 90 m (digit x 10 m)	D#

Connector

Conn. type, as per TP-600	#-
Conn. type assignment, as per TP-600	-#

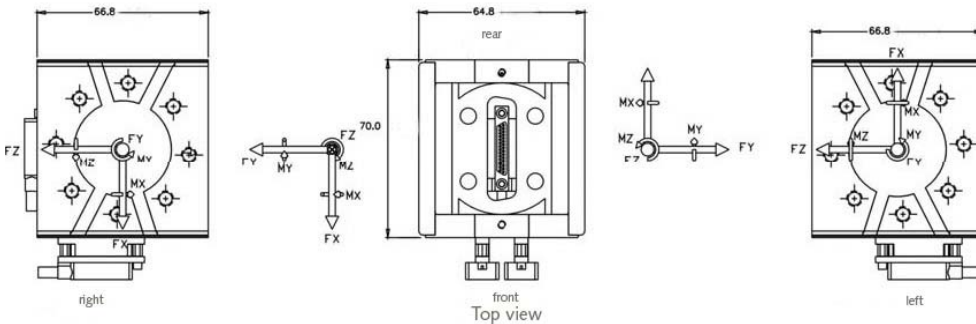


Fig. 2: Dimensions

Included Accessories

- None

Optional Accessories

- Add. label with serial number, plug side
- ID module
- Add. label with ID number at sensor
- Add. shunt

Type No.

- M015KABID on request
- M015KABID on request

M5670BA_000-965e-12.11

This information corresponds to the current state of knowledge. Kistler reserves the right to make technical changes. Liability for consequential damage resulting from the use of Kistler products is excluded.

©2011, Kistler Group, Eulachstrasse 22, 8408 Winterthur, Switzerland
 Tel. +41 52 224 11 11, Fax +41 52 224 14 14, info@kistler.com, www.kistler.com
 Kistler is a registered trademark of Kistler Holding AG.