



FLUSH DIAPHRAGM IS® PRESSURE TRANSDUCERS




IPT-750 SERIES BM-750 SERIES

- High Output
- Hygienic Construction
- Process Instrument Compatible
- Flush Stainless Steel Diaphragm
- Hermetic Sealed Connector (BM-750)
- Intrinsically Safe Applications Available (i.e. IS-IPT-750 or IS-BM-750)



This midsize range of Kulite pressure sensors, incorporating flush stainless steel diaphragms, are designed as general purpose measuring instruments. These units incorporate a four arm active semiconductor chip isolated from pressure media by an oil barrier and stainless steel membrane.

Typical applications include tank contents, head pressure and soil stress measurement. The units are manufactured to allow cleaning by sterilization when used in the food processing industry and medical field. Sealing is accomplished with an o-ring. Typical mounting configuration requires a clamp situated behind the .930 diameter shoulder. By using a standard inlet port adaptor, the unit can be converted for pipe mounting applications.

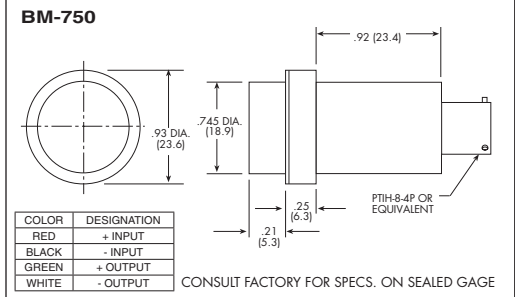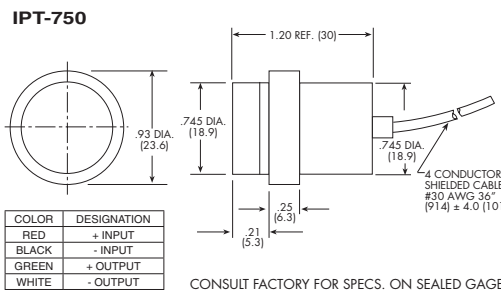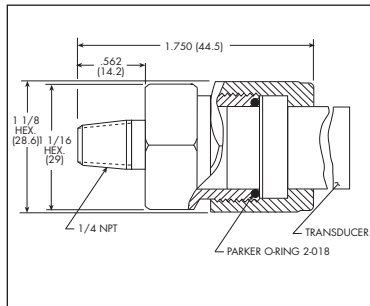

INPUT Pressure Range	1.7 25	3.5 50	7 100	17 250	35 BAR 500 PSI
Operational Mode	Absolute, Sealed Gage, Gage (Consult Factory For Vented Gage)				
Over Pressure	2 Times Rated Pressure Range				
Burst Pressure	3 Times Rated Pressure Range				
Pressure Media	Any Liquid or Gas Compatible With 17-4 PH or 316 SS				
Rated Electrical Excitation	10 VDC/AC (RMS)				
Maximum Electrical Excitation	12 VDC/AC (RMS)				
Input Impedance	1000 Ohms (Min.)				
OUTPUT Output Impedance	1000 Ohms (Nom.)				
Full Scale Output (FSO)	100 mV (Nom.)				
Residual Unbalance	± 5 mV (Typ.)				
Combined Non-Linearity, Hysteresis and Repeatability	± 0.1% FSO BFS (Typ.), ± 0.5% FSO (Max.)				
Resolution	Infinitesimal				
Natural Frequency (KHz) (Typ.)	120	210	285	425	550
Insulation Resistance	100 Megohm Min. @ 50 VDC				
ENVIRONMENTAL Operating Temperature Range	-65°F to +250°F (-55°C to +120°C)				
Compensated Temperature Range	80°F to +180°F (25°C to +80°C) Other Ranges Quoted on Request				
Thermal Zero Shift	± 1% FS/100°F (Typ.)				
Thermal Sensitivity Shift	± 1% /100°F (Typ.)				
Linear Vibration	100g Peak, Sine 10 to 5000 Hz				
Altitude	-150 ft. to +70,000 ft. Will Not Damage Sensor				
Humidity	100% Relative Humidity				
Mechanical Shock	100g half Sine Wave 11 msec. Duration				
PHYSICAL Pressure Port	Flush Mount, Unthreaded (1/4" N.P.T. Male SS Adaptor Available)				
Electrical Connection	4 Conductor 30 AWG Shielded Cable 36" Long (IPT-750)			PTIH-8-4P or Equivalent (BM-750)	
Weight	39 Grams Approx. (IPT-750)			42 Grams Approx. (BM-750)	
Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon				
Mounting Torque	100 Inch-Pounds (Max.) For Inlet Port Adaptor				