



# 4600 Precision Thermometer



- Thermometer accuracy  $\pm 0.015^{\circ}\text{C}$  from  $0^{\circ}\text{C}$  to  $50^{\circ}\text{C}$
- System accuracy  $\pm 0.115^{\circ}\text{C}$  from  $0^{\circ}\text{C}$  to  $50^{\circ}\text{C}$  when used with 400-series probes
- $^{\circ}\text{C}$  or  $^{\circ}\text{F}$  readout
- RS-232 communication capability

## DESCRIPTION

High precision thermometer for use with 400-series thermistor probes.

## FEATURES

- 400-series probe input
- RS-232 communication capability
- $^{\circ}\text{C}$  or  $^{\circ}\text{F}$  readout


## APPLICATIONS

- Laboratory measurements


## PERFORMANCE SPECS

Parameter		Units	Value
Instrument Accuracy	@ $-40^{\circ}\text{C}$	$\pm^{\circ}\text{C}$	0.100
	$0^{\circ}\text{C}$ to $50^{\circ}\text{C}$	$\pm^{\circ}\text{C}$	0.015
	@ $+70^{\circ}\text{C}$	$\pm^{\circ}\text{C}$	0.025
	@ $+100^{\circ}\text{C}$	$\pm^{\circ}\text{C}$	0.065
	@ $+150^{\circ}\text{C}$	$\pm^{\circ}\text{C}$	0.320
<b>Note:</b> Add interchangeability accuracy of 400 Series probes for total system accuracy. ( $\pm 0.40^{\circ}\text{C}$ @ $-40^{\circ}\text{C}$ ; $\pm 0.10^{\circ}\text{C}$ from $0^{\circ}$ to $70^{\circ}\text{C}$ ; $\pm 0.21^{\circ}$ @ $100^{\circ}\text{C}$ ; $\pm 0.40$ @ $150^{\circ}\text{C}$ )			
Resolution:	$-40^{\circ}$ to $+100^{\circ}\text{C}$	$^{\circ}\text{C}$	0.01
	$+102^{\circ}$ to $+150^{\circ}\text{C}$	$^{\circ}\text{C}$	0.02
Repeatability ( $-20^{\circ}$ to $+100^{\circ}\text{C}$ ) typical for 1 week at constant ambient temperature		$^{\circ}\text{C}$	0.0002 to .001
Reading Rate per Second			2
Battery Life		Hours	20
Operating Conditions		$^{\circ}\text{C}$	10 to 40
		% RH	85

## BLOCK DIAGRAM



# 4600 Precision Thermometer

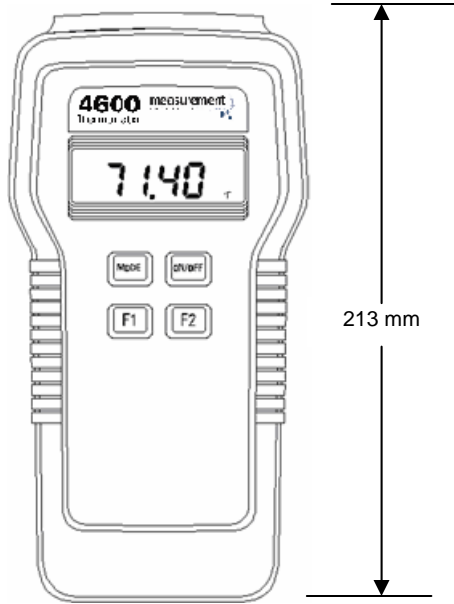

## ORDERING INFORMATION

Part Number	Description	Probes	MOQ
046002	4600 Precision Thermometer	400 Series	3

\* For quantities less than Minimum Order Quantity – contact distribution

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.