


# Technical Specification

## NO-B1 Nitric Oxide Sensor



Figure 1 NO-B1 Schematic Diagram

PATENTED

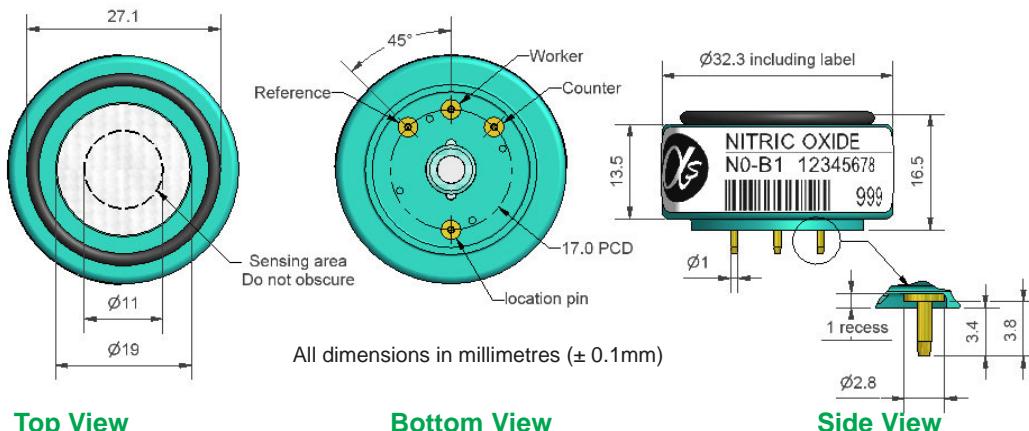

Top View

Bottom View

Side View

<b>PERFORMANCE</b>	Sensitivity	nA/ppm in 50ppm NO	400 to 660
	Response time	t <sub>90</sub> (s) from zero to 50ppm NO	< 20
	Zero current	ppm equivalent in zero air	0 to +3
	Resolution	RMS noise (ppm equivalent)	< 0.15
	Range	ppm NO limit of performance warranty	250
	Linearity	ppm error at full scale, linear at zero and 50ppm NO	-20 to -25
	Overgas limit	maximum ppm for stable response to gas pulse	1200

<b>LIFETIME</b>	Zero drift	ppm equivalent change/year in lab air	<0.3
	Sensitivitydrift	% change/year in lab air, monthly test	<5
	Operating life	months until 80% original signal (24 month warranted)	> 24

### ENVIRONMENTAL

Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 50ppm NO	87 to 95
Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 50ppm NO	102 to 107
Zero @ -20°C	ppm equivalent change from 20°C	± 1
Zero @ 50°C	ppm equivalent change from 20°C	6 to 10

<b>CROSS SENSITIVITY</b>	H <sub>2</sub> S	sensitivity	% measured gas @ 20ppm	H <sub>2</sub> S	< 60
	NO <sub>2</sub>	sensitivity	% measured gas @ 10ppm	NO <sub>2</sub>	< 5
	Cl <sub>2</sub>	sensitivity	% measured gas @ 10ppm	Cl <sub>2</sub>	< 5
	SO <sub>2</sub>	sensitivity	% measured gas @ 20ppm	SO <sub>2</sub>	< 4
	H <sub>2</sub>	sensitivity	% measured gas @ 400ppm	H <sub>2</sub>	< 0.1
	CO	sensitivity	% measured gas @ 400ppm	CO	< 0.1
	NH <sub>3</sub>	sensitivity	% measured gas @ 20ppm	NH <sub>3</sub>	< 0.1
	CO <sub>2</sub>	sensitivity	% measured gas @ 5% Vol	CO <sub>2</sub>	< 0.1

### KEY SPECIFICATIONS

Bias voltage	mV (working electrode potential is above ground)	+300
Temperature range	°C	-30 to 50
Pressure range	kPa	80 to 120
Humidity range	% rh continuous	15 to 90
Storage period	months @ 3 to 20°C (stored in sealed pot)	6
Load resistor	Ω (recommended)	10 to 47
Weight	g	< 13

 **NOTE:** all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

# Technical Specification

## NO-B1 Performance Data

Figure 2 Sensitivity Temperature Dependence

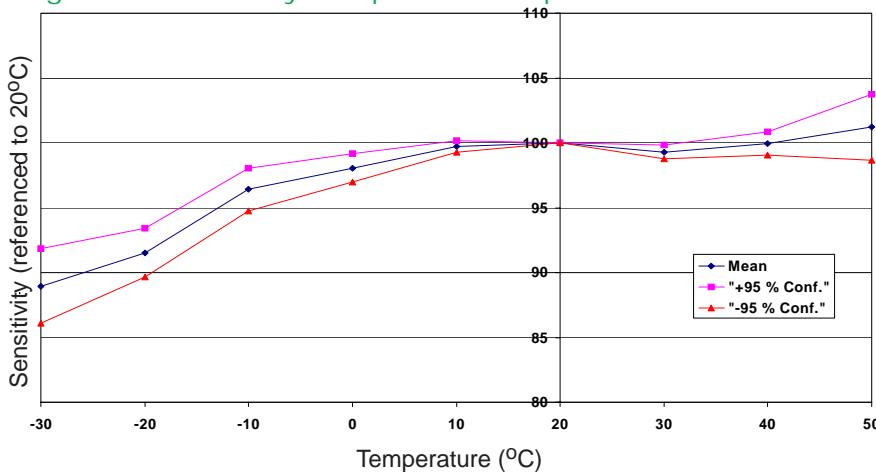


Figure 2 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors. The mean and  $\pm 95\%$  confidence intervals are shown.

Figure 3 Zero Temperature Dependence


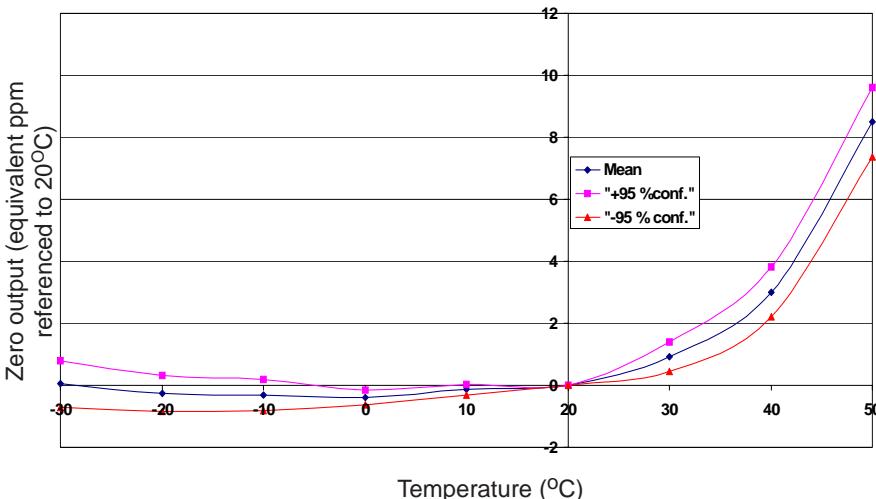


Figure 3 shows the variation in zero output caused by changes in temperature expressed as ppm gas equivalent.

This data is taken from a typical batch of sensors. The mean and  $\pm 95\%$  confidence intervals are shown.

Figure 4 NO-B1 Response to 1200ppm NO

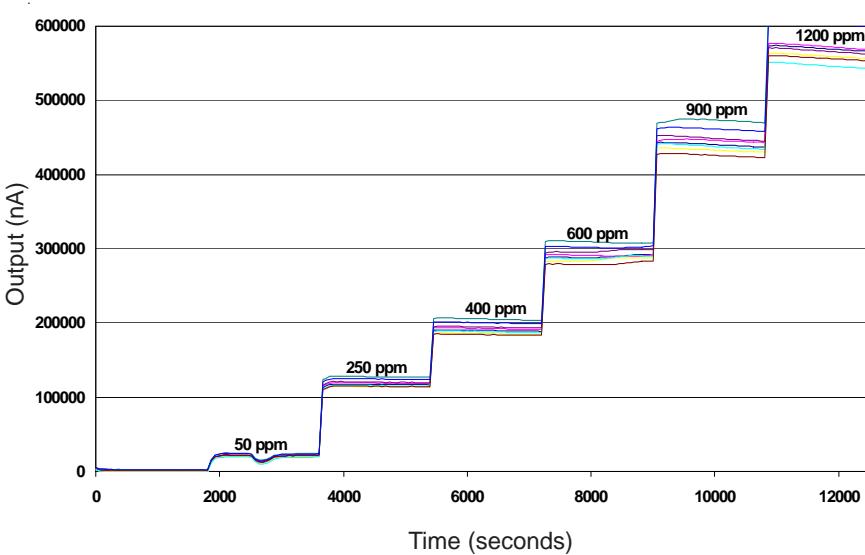

The NO-B1 responds rapidly to gas concentrations up to 1200ppm NO.

This data is taken from a typical batch of sensors.