

UV-TIAMO-M

- SiC UV Photodiode
- Integrated Transimpedance Amplifier
- Sensitivity Range: 210-380 nm
- Max. Irradiance: 180 mW/cm²
- TO-5 Can, Flat Window Cap



Description

UV-TIAMO devices are using modern hybrid technology to cancel unwanted signal disturbances caused by moisture or electromagnetic radiation. The stable 0-5 V output voltage can be directly connected to a SPC controller or a voltage multimeter. No external amplifier is needed

Maximum Ratings

Parameter	Symbol	Values		Unit
		Min.	Max.	
Operating Temperature	T_{CASE}	- 25	+ 85	°C
Storage Temperature	T_{STG}	- 40	+ 100	°C
Lead Solder Temperature *	T_{SLD}		+ 300	°C

* must be completed within 5 seconds

General Characteristics ($T_{CASE}=25^{\circ}C$, $V_{SUPPLY}=+5V$)


Parameter	Symbol	Min.	Values	Max.	Unit
			Typ.		
Supply Voltage	V_{SUPPLY}	2.5		5.0	V
Saturation Voltage	V_{SAT}		V_{SUPPLY}		V
Dark Offset Voltage	V_{OFFSET}		50		μV
Temperature Coefficient	T_C			+0.3	%/K
Current Consumption	I		0.8		mA
Bandwidth (-3 dB)	Θ		15		Hz
Rise Time (63%)	t_r		10		ms

Spectral Characteristics ($T_{CASE}=25^{\circ}C$, $V_{SUPPLY}=+5V$)


Parameter	Symbol	Min.	Values	Max.	Unit
			Typ.		
Broadband Sensitivity	S	0.018		18	mW/cm ²
Sensitivity at Peak	S_{max}		280		mV/μW/cm ²
Wavelength of max. Spectral Sensitivity	λ_{max}		300		nm
Sensitivity Range ($S=0.1*S_{max}$)		210		380	nm
Visible Blindness ($S_{max}/S_{>405nm}$)	VB	10^{10}			

Performance Characteristics

Spectral Response

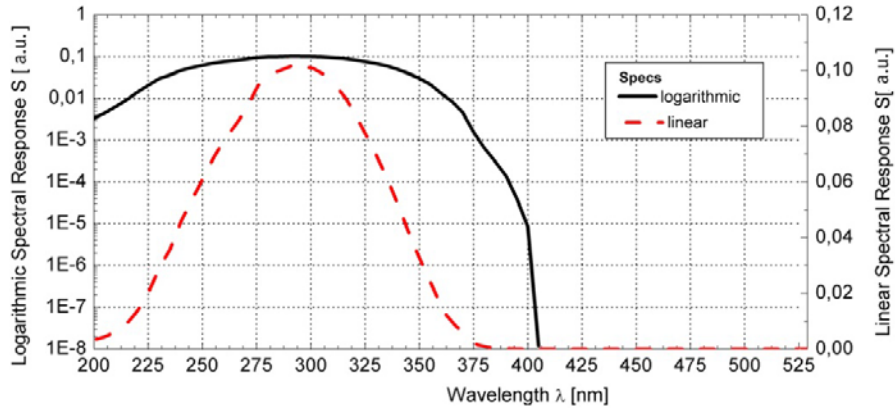

Field of View

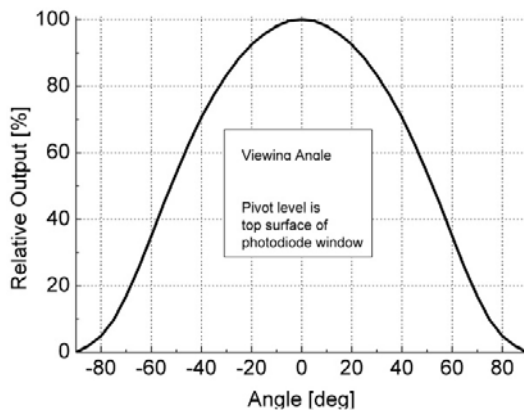

Outline Dimensions

TO-5 with flat window

