



**SEMITEC<sup>®</sup>**


**Ishizuka Electronics Corporation**

**PRODUCT CATALOG**

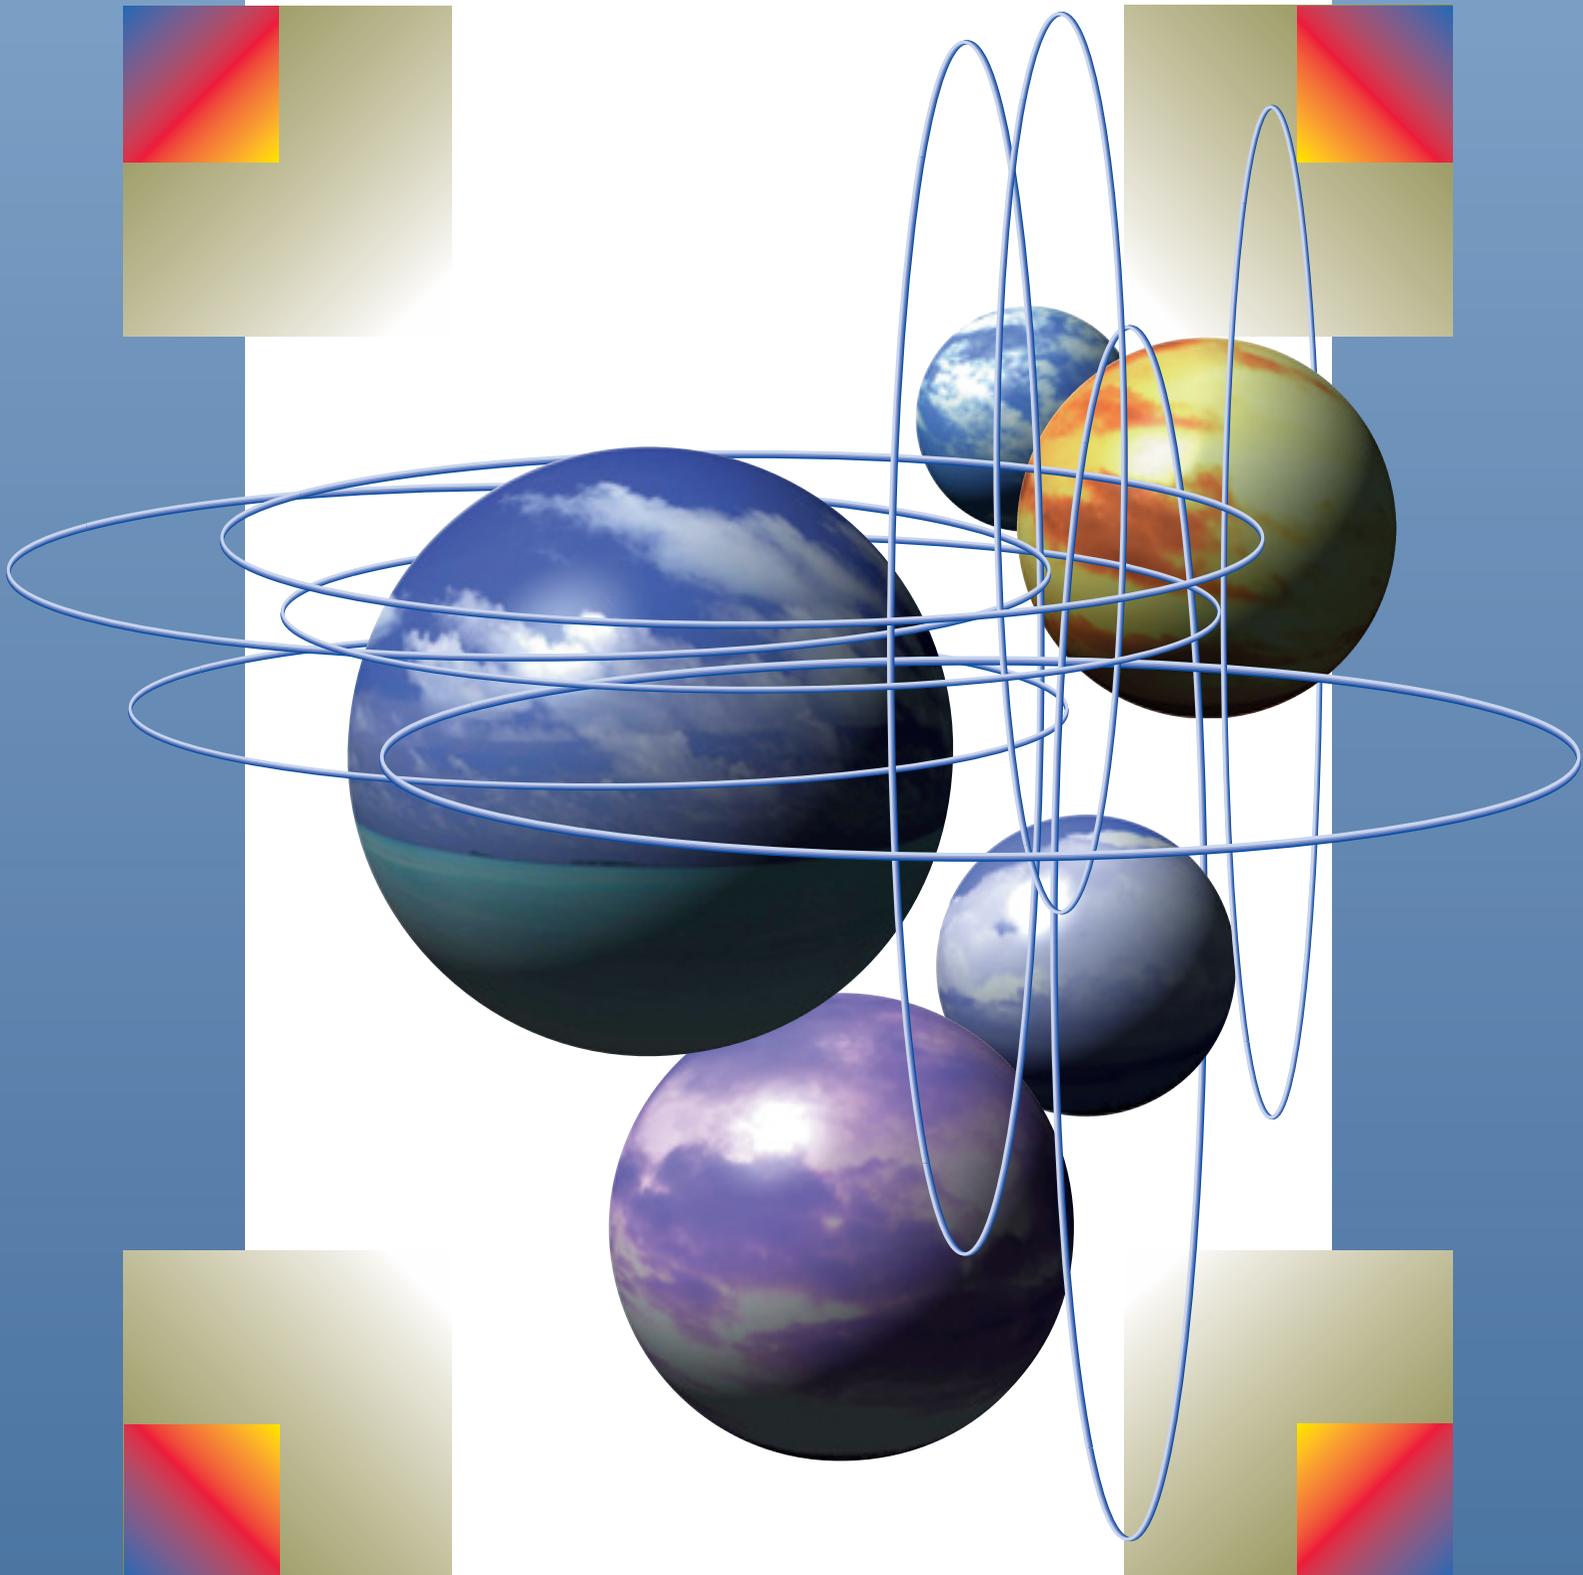

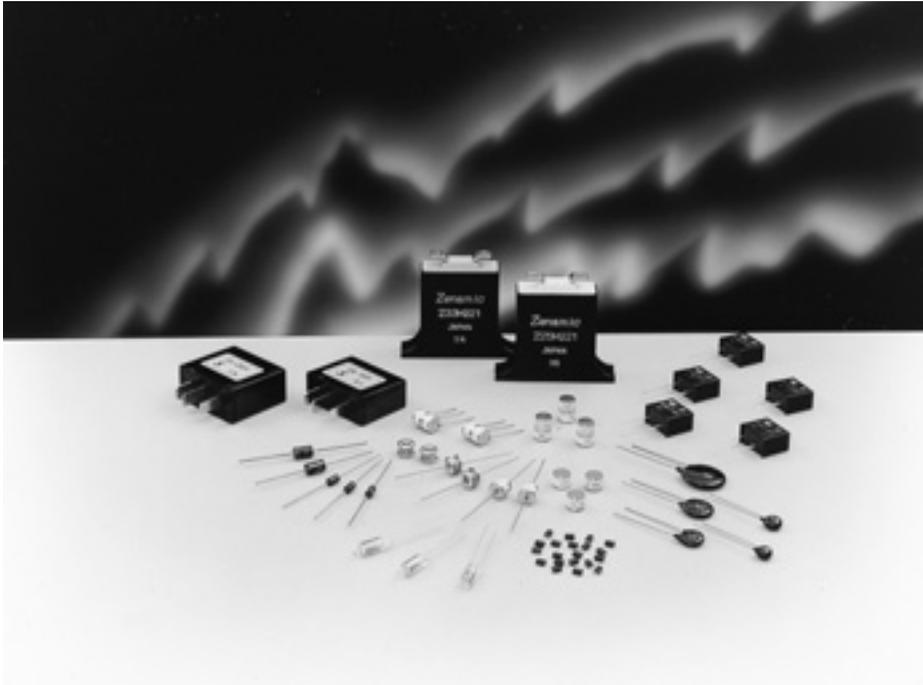

## SURGE ABSORBERS

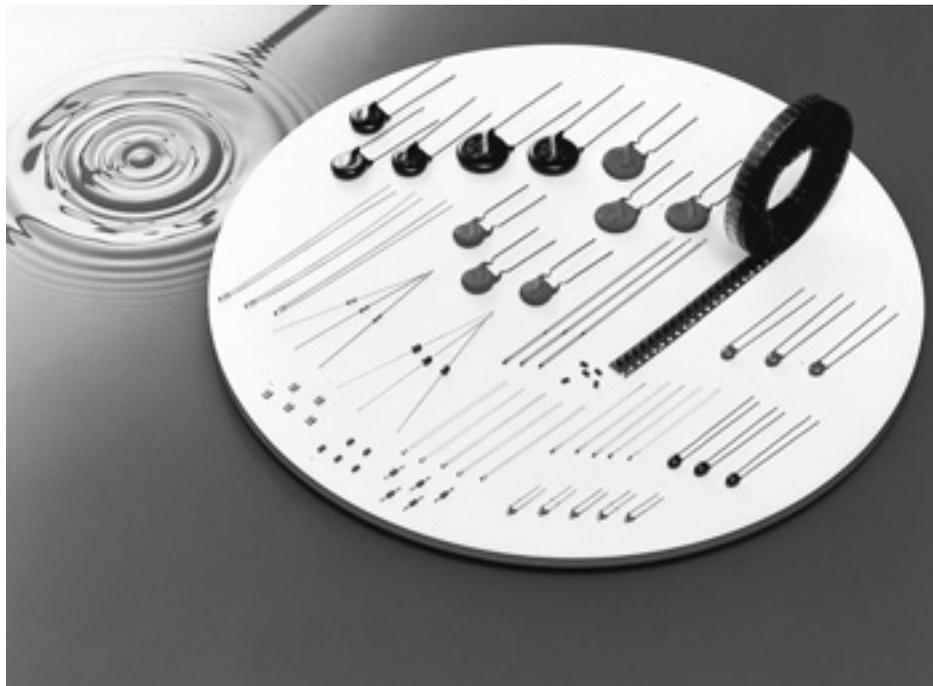

## THERMISTORS

<p><b>New Line-Up</b></p> <ul style="list-style-type: none"> <li>· AP THERMISTOR</li> <li>· THERMOPILE</li> <li>· NC SENSOR</li> </ul>	4
<p><b>THERMISTOR</b></p> <ul style="list-style-type: none"> <li>· HIGH PRECISION SERIES</li> <li>· SMD SERIES</li> <li>· HIGH HEAT-RESISTANCE SERIES</li> <li>· DISK SERIES</li> <li>· SENSORS</li> </ul>	7
<p><b>POWER THERMISTOR</b></p> <ul style="list-style-type: none"> <li>· D-TYPE SERIES</li> <li>· MARK II SERIES</li> <li>· D2-TYPE SERIES</li> </ul>	23
<p><b>VRD</b> (TRANSIENT VOLTAGE SUPPRESSOR)</p> <ul style="list-style-type: none"> <li>· LEAD TYPE SERIES</li> <li>· SMD SERIES</li> </ul>	28
<p><b>CRD</b> (CURRENT REGULATIVE DIODE)</p> <ul style="list-style-type: none"> <li>· LEAD TYPE SERIES</li> <li>· MELF TYPE SERIES</li> </ul>	32
<p><b>ZENAMIC</b> (METAL OXIDE VARISTOR)</p> <ul style="list-style-type: none"> <li>· LEAD TYPE SERIES</li> <li>· M TYPE SERIES</li> <li>· SURGE ABSORBER UNIT SERIES</li> </ul>	34
<p><b>GAS TUBE ARRESTER</b></p> <ul style="list-style-type: none"> <li>· CERAMIC TUBE SERIES</li> <li>· GLASS TUBE SERIES</li> <li>· SA-01 SERIES</li> </ul>	40

# AP THERMISTOR

The AP Thermistor features higher accuracy and higher resistance to heat than our existing high-precision thermistor. AP Thermistor suits various types of application.


## Features

- Super high-precision : Tolerance on  $R_{25}$  and  $B_{25/85}$  is  $\pm 0.5\%$ .
- Narrow deviation in wide temperature range: Accurate temperature detecting with tolerance of  $\pm 0.5^\circ\text{C}$  in  $-60^\circ\text{C}$  to  $70^\circ\text{C}$ .
- High resistance to heat : Category temperature range is  $-60^\circ\text{C}\sim 150^\circ\text{C}$ .


## Applications

Portable devices, Battery packs, Fan motor, Automobile, Office automation equipment, Electrical household appliances, Security devices, Thermometer, Measurement equipment, Temperature detecting, etc.

## Part number

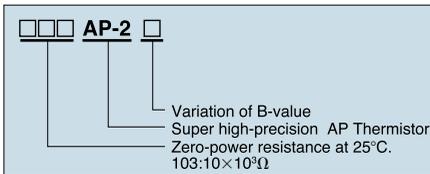


## Dimensions

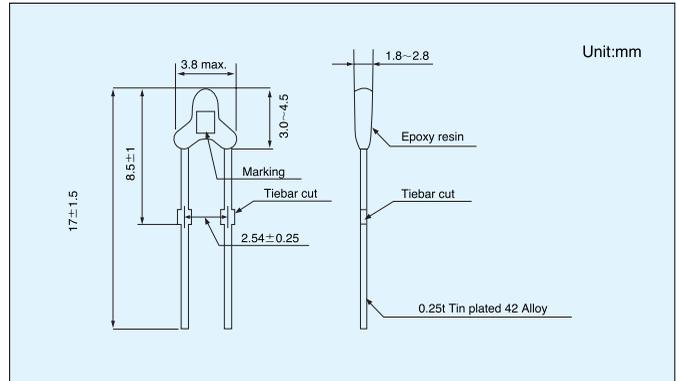

This products complies with RoHS

## Temperature accuracy

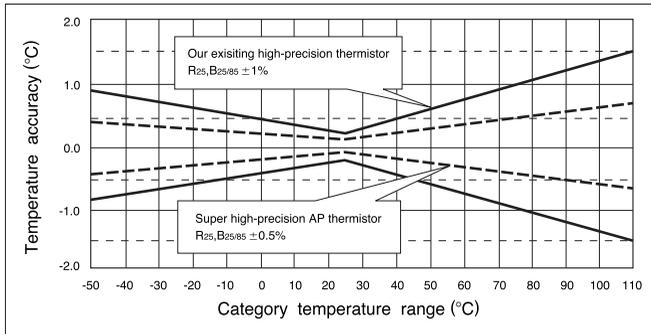

## Rating and characteristic

Part No.	$R_{25}^{*1}$	B value <sup>*2</sup>	Dissipation factor (mW/°C) Approx.	Thermal time constant(s) <sup>*3</sup> Approx.	Rated maximum power dissipation(at 25°C)(mW)	Category temperature range(°C)
202AP-2	2.00kΩ	3976K	1.2	15	6	-60~150
232AP-2	2.252kΩ	3976K				
502AP-2	5.00kΩ	3976K				
103AP-2	10.0kΩ	3435K				
103AP-2-A		3976K				
203AP-2	20.0kΩ	3976K				
503AP-2	50.0kΩ	4220K				
104AP-2	100kΩ	4261K				
204AP-2	200kΩ	4470K				

\*1  $R_{25}$ : Zero-power resistance value at 25°C.

\*2 B-value : Calculated from the zero-power resistance values measured at 25°C and 85°C.

\*3 Time when Thermistor temperature reaches 63.2% of the temperature difference. The value is measured in still air.

# THERMOPILE TYPE INFRARED SENSOR

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com

## THERMOPILE

Thermopile type Infrared sensor  
utilizing own silicon micromachining  
technology.


Applications: Tympanic thermometer  
Microwave oven  
Non contact temperature measurement



### Part number

Part No.	type	Thermistor
10TP583T	TO18	Built-in

### Dimensions

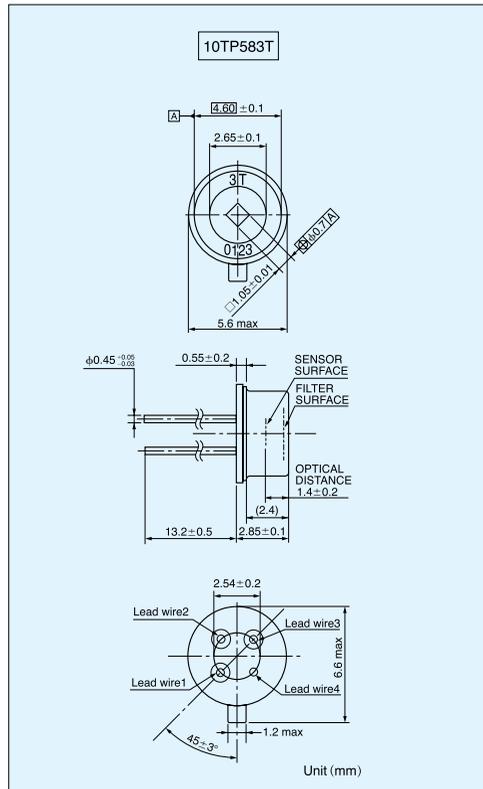

### Ratings

Parameters	Value		Unit	Conditions
	10TP581	10TP583T		
Sensitive area	1.05×1.05		mm <sup>2</sup>	Size of Absorbing Film
*1 Responsivity	15±30%		V/W	
*1 Output Voltage	200±30%		μV	
*2 Output Voltage	1.00±30%		mV	
*1 Temperature Coefficient of Responsivity	0.02±0.02		% / °C	Reference
Thermopile Resistance	65±30%		kΩ	
Temperature Coefficient of Thermopile Resistance	±0.1		% / °C	
Johnson Noise Voltage	33		nV / √Hz	Johnson Noise r.m.s., 298K 1Hz Typical
*1 S/N Ratio	75.7		dB	Output Voltage/Johnson Noise, Typical
*1 Noise Equivalent Power	2.2		nW / Hz <sup>1/2</sup>	Typical
*1 Specific Detectivity	4.7×10 <sup>7</sup>		cm·Hz <sup>1/2</sup> /w	Typical
Time Constant	15		ms	Typical
Operating Temperature range	-20~100		°C	
Storage Temperature range	-40~100		°C	
Filter Range	Cut on 5		μm	Standard
Field of View	±50		deg.	Incident Angle to Achieve 50% Responsivity
Insulation Resistance	≥500		MΩ	Application of DC25V
Sealing	≤1×10 <sup>-9</sup>		Pa·m <sup>3</sup> /s	
*3 Thermistor Resistance Value	100±3%		kΩ	Rated Zero-power Resistance Value at 25°C
*3 Thermistor B-Value	3435±0.7%		K	
*3 Thermistor Rated Power	0.5		mW	at 25°C

\*1 Test Condition  
Blackbody Temperature : 500K  
Sensor-Blackbody Distance : 100mm  
Sensor Temperature : 298K  
Aperture size : φ12.7mm

\*2 Test Condition  
Blackbody Temperature : 310K  
Sensor Temperature : 298K

\*3 Built-in Type

# NON-CONTACT SENSOR (Infrared sensing temperature detector)

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com

## NC SENSOR



NC SENSOR is the remote temperature sensor consisting of two precision thermistors.

### 1.Features


- Larger output in comparison with other IR sensors.
- Operating temperature of up 150°C.(M-type : 130°C)
- Minimum negative influence caused by a dew and/or dust.

### 2.Applications

- Temperature measurement of the LBP and PPC heat-roller.
- White goods such as microwave-ovens, air-conditioner, refrigerator and so on.
- Any other measurement requiring the remote-sensing.

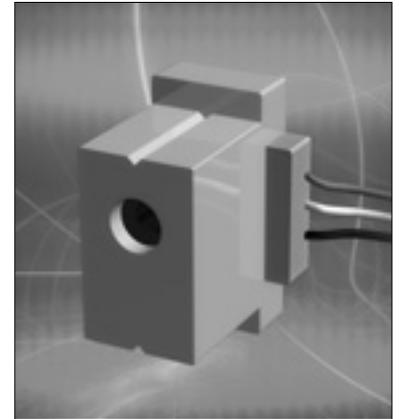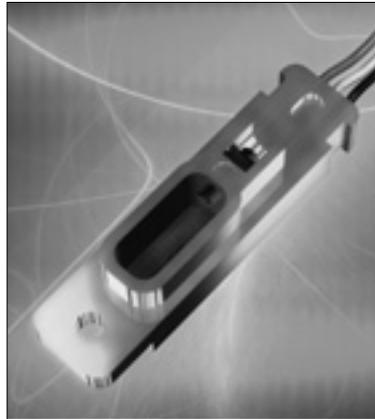

### 3. Dimensions

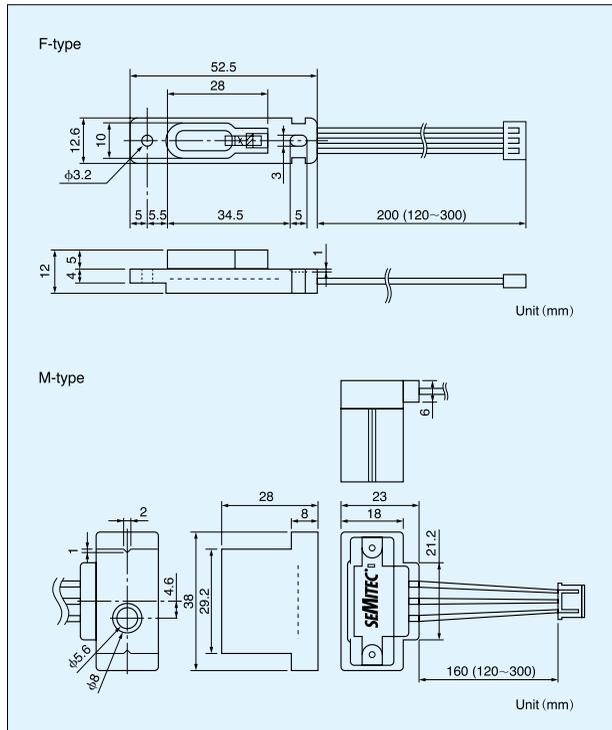

### 4.Specification

Parameters	F-type (for heat-roller)		M-type (for microwave ovens)	
	Performance	Conditions	Performance	Conditions
Temperature Accuracy	180°C±3°C	Blackbody Temperature : 180°C Thermal Emissivity : 0.96 Temperature compensation : 100°C Roller Size : 40mm Testing Distance : 5mm Resistor Connected : 33.0kΩ Power Line Voltage : DC 5.000V	60°C±5°C	Blackbody Temperature : 60°C Thermal Emissivity : 0.995 Temperature compensation : 25°C Resistor Connected : 68.0kΩ Power Line Voltage : DC 5.000V
Category Temperature Range	-10°C~150°C		-10°C~130°C	
Temperature Detecting range	-10°C~260°C		-10°C~100°C	

The NC SENSOR is a custom-made product.  
Please consult our sales staff.

# THERMISTOR

"Thermistor" is the generic name given to thermally sensitive resistors. Negative temperature coefficient thermistor is generally called as thermistor. Thermistor is a semiconducting ceramic resistor produced by sintering the materials at high temperature and made mainly from metal oxide. Depending on the manufacturing method and the structure, there are many shapes and characteristics for various purposes such as temperature measurement, temperature compensation and etc. The thermistor resistance values, unless otherwise specified, are classified at a standard temperature of 25°C. B value is calculated from the resistance values at 25°C and 85°C.

## Resistance-Temperature Characteristics

The resistance of a temperature is solely a function of its absolute temperature. Since electrical power being dissipated within a temperature might heat above its ambient temperature and thereby reduce its resistance, it is necessary to test for resistance with temperature. The resistance so measured is called  $R_T$ , which means the resistance at essentially zero-power.

The mathematical expression which relates the resistance and the absolute temperature of a thermistor is as follows:


$$R_a = R_b \exp \left[ B \left( \frac{1}{T_1} - \frac{1}{T_2} \right) \right]$$

Where:  $R_a$  is the resistance at absolute temperature  $T_1$   
 $R_b$  is the resistance at absolute temperature  $T_2$   
 $B$  is a constant which depends on the material of the thermistor

Unless otherwise specified, all values of  $B$  are determined from measurements made at 25°C and 85°C.

The temperature coefficient of resistance  $\alpha$  is expressed in the following equation:

$$\alpha = - \frac{B}{T^2} \times 100 (\%/^{\circ}\text{C})$$

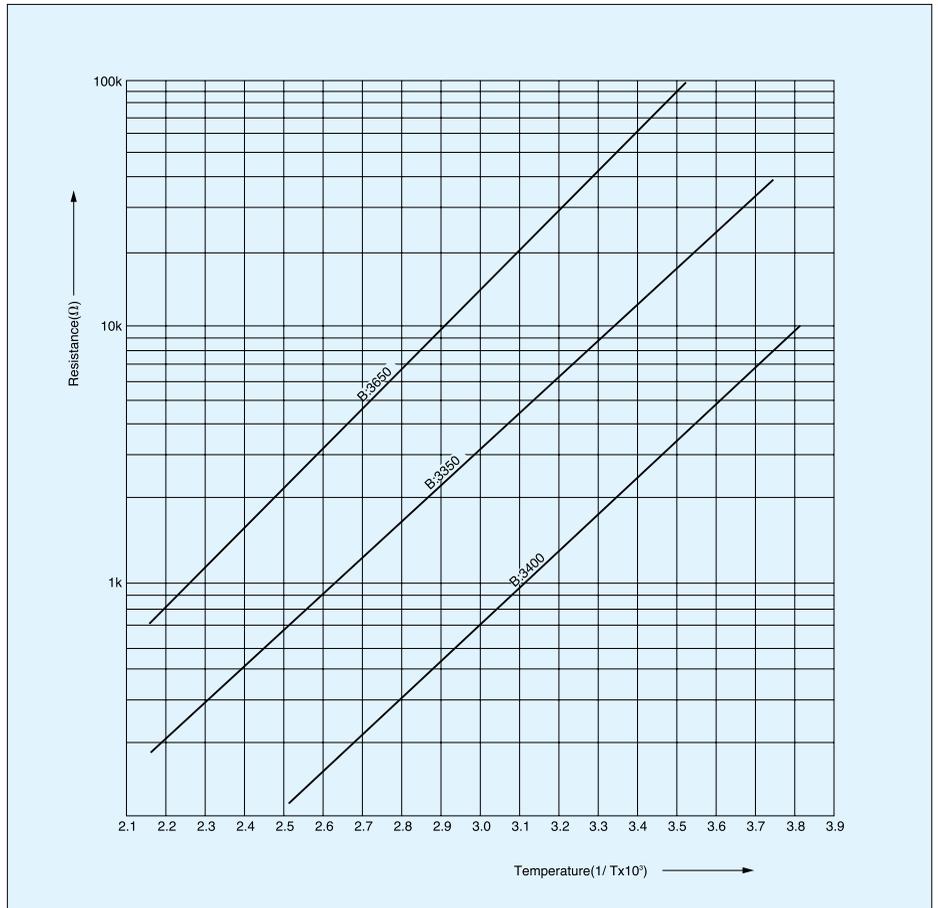

## Dissipation factor

Dissipation factor ( $\delta$ ) is power in milliwatts required to raise thermistor temperature 1°C. Measured with thermistor suspended by its leads in a specified environment.


$$\delta = \frac{P}{\Delta t} \text{ (mW/}^{\circ}\text{C)}$$

$P$  : Power (mW)

$\Delta t$  : Raise temperature (°C)

## Thermal time constant

Thermal time constant ( $\tau_a$ ) is the time required by a thermistor to change 63% of the difference between its initial and final temperature. Measured with thermistor suspended by its leads in specified environment.

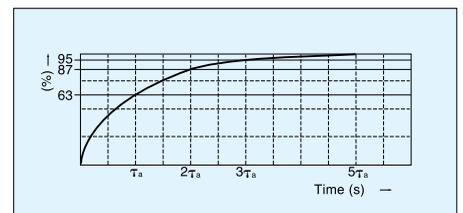


# ULTIMATE THINNESS, JT THERMISTOR

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com


## 500 $\mu$ m only

## JT THERMISTOR


JT thermistors feature ultra thinness of 500 $\mu$ m and superior electrical insulation. It is possible to use with safety in ambience that might contact with electrodes.

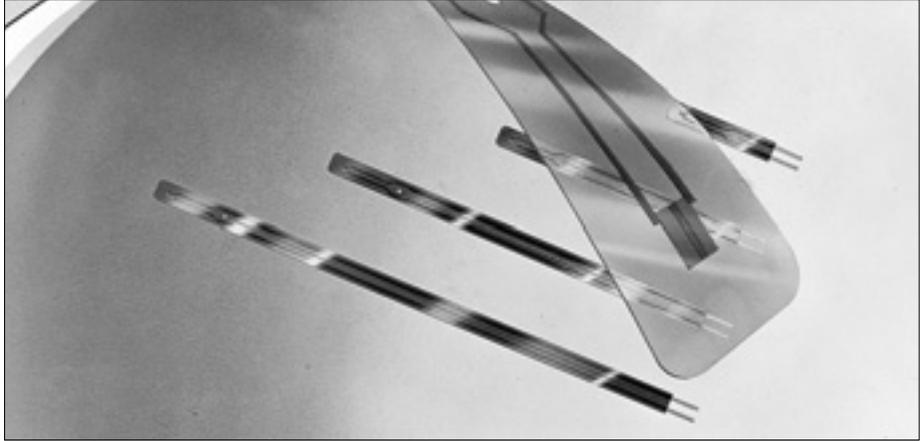

### Part number

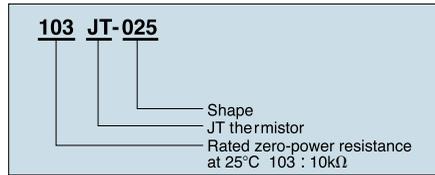

### Dimensions

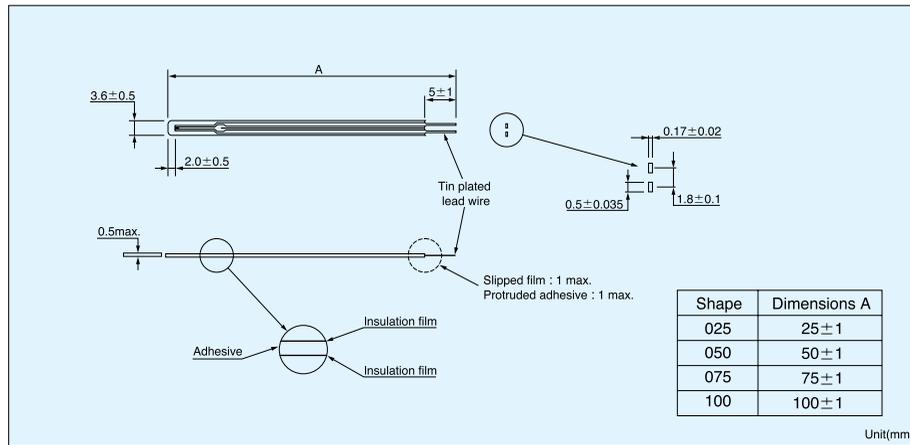

### Resistance-Temperature

Temperature (°C)	Type	
	103JT	104JT
-50	367.7	9584
-40	204.7	4572
-30	118.5	2282
-20	71.02	1191
-10	43.67	647.2
0	27.70	365.0
10	18.07	212.5
20	12.11	127.7
30	8.301	78.88
40	5.811	50.03
50	4.147	32.51
60	3.011	21.61
70	2.224	14.66
80	1.668	10.13
90	1.267	7.135
100		5.111
110		3.720
120		2.746
125		2.371

Unit(k $\Omega$ )

### Specifications

Part No.	R <sub>25</sub> *1	B value*2	Dissipation factor (mW/°C) Approx.	Thermal time constant(s)*3	Rated maximum power dissipation(at 25°C)(mW)	Category temp. range(°C)
103JT-□□□	10k $\Omega$ ±1%	3435K±1%	0.7	5	3.5	-50~90
104JT-□□□	100k $\Omega$ ±1%	4390K±1%	0.7	5	3.5	-50~125

\*1 R<sub>25</sub>: Rated zero-power resistance value at 25°C, ±2% and 3% are also available.

\*2 B value: determined by rated zero-power resistance at 25°C and 85°C.

\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.

# HIGH PRECISION THERMISTOR

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com


## AT THERMISTOR

The AT thermistor is a high-precision thermal sensing device featuring extremely small B-value tolerance and resistance.


When used as a temperature gauge, the AT thermistor requires no adjustment between the control circuit and the sensor.

This insures temperature precision of  $\pm 0.3^{\circ}\text{C}$ . Temperature indicators and control instruments are now available for use with the thermistor.


### Part number

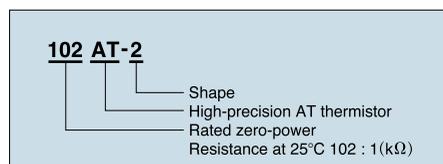


### Dimensions

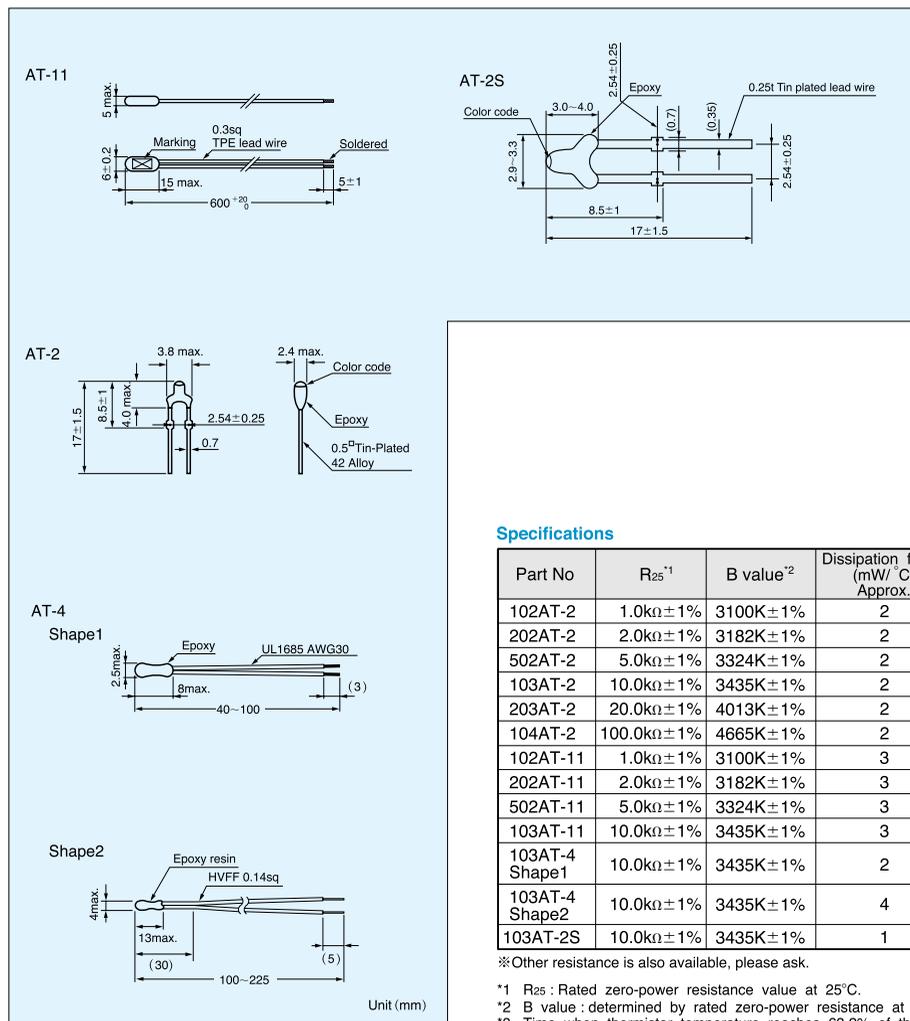

### Resistance tolerance

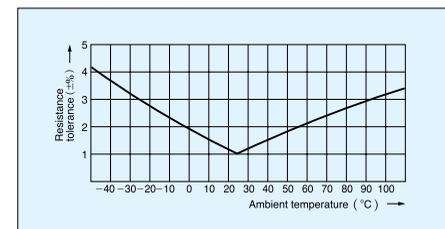

### Interchange precision

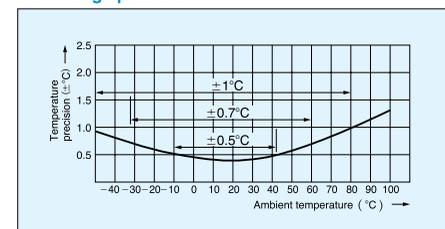

### Specifications

Part No	R <sub>25</sub> <sup>1</sup>	B value <sup>2</sup>	Dissipation factor (mW/°C) Approx.	Thermal time constant (s) <sup>3</sup> Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)	Color code
102AT-2	1.0k $\Omega$ ±1%	3100K±1%	2	15	10	-50~90	Black
202AT-2	2.0k $\Omega$ ±1%	3182K±1%	2	15	10	-50~90	Red
502AT-2	5.0k $\Omega$ ±1%	3324K±1%	2	15	10	-50~110	Yellow
103AT-2	10.0k $\Omega$ ±1%	3435K±1%	2	15	10	-50~110	White
203AT-2	20.0k $\Omega$ ±1%	4013K±1%	2	15	10	-50~110	None
104AT-2	100.0k $\Omega$ ±1%	4665K±1%	2	15	10	-50~110	None
102AT-11	1.0k $\Omega$ ±1%	3100K±1%	3	75	15	-50~90	None
202AT-11	2.0k $\Omega$ ±1%	3182K±1%	3	75	15	-50~90	None
502AT-11	5.0k $\Omega$ ±1%	3324K±1%	3	75	15	-50~105	None
103AT-11	10.0k $\Omega$ ±1%	3435K±1%	3	75	15	-50~105	None
103AT-4 Shape1	10.0k $\Omega$ ±1%	3435K±1%	2	10	10	-30~90	None
103AT-4 Shape2	10.0k $\Omega$ ±1%	3435K±1%	4	35	20	-30~90	None
103AT-2S	10.0k $\Omega$ ±1%	3435K±1%	1	15	5	-50~110	white

※Other resistance is also available, please ask.

<sup>1</sup> R<sub>25</sub> : Rated zero-power resistance value at 25°C.


<sup>2</sup> B value : determined by rated zero-power resistance at 25°C and 85°C.

<sup>3</sup> Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.



# AT-5 THERMISTOR

AT-5 thermistor is available in taping.

## Part number

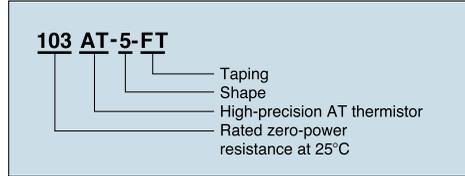

## Dimensions

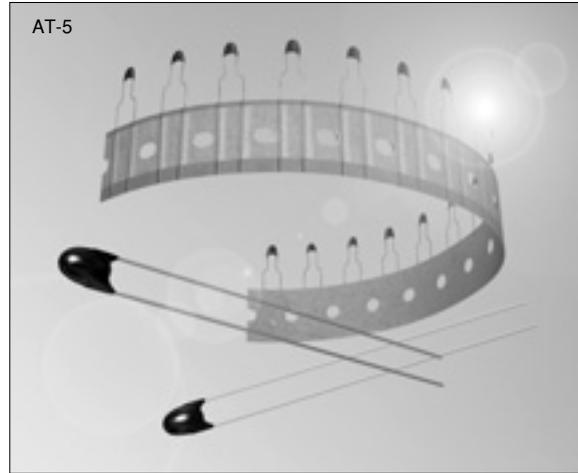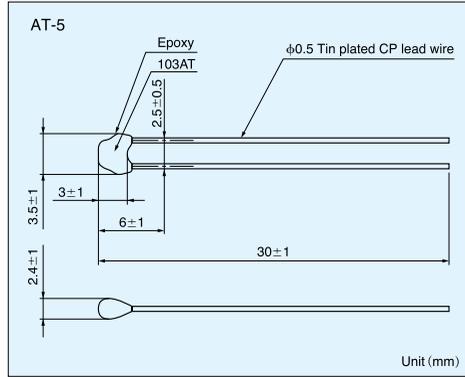

## Specifications

Part No	R <sub>25</sub> <sup>*1</sup>	B value <sup>*2</sup>	Dissipation factor (mW/°C) Approx.	Thermal time constant(s) <sup>*3</sup> Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
103AT-5	10.0kΩ±1%	3435K±1%	2.5	15	10	-50~110


※Other resistance is also available, please ask.

\*1 R<sub>25</sub>: Rated zero-power resistance value at 25°C.

\*2 B value: determined by rated zero-power resistance at 25°C and 85°C.

\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.

## Taping

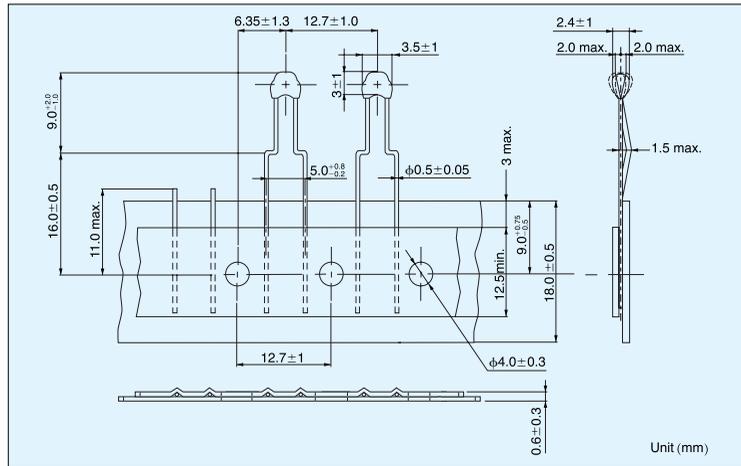



## Resistance -Temperature

Temperature (°C)	Type							Temperature (°C)	Type						
	102AT	202AT	502AT	103AT	203AT	503AT	104AT		102AT	202AT	502AT	103AT	203AT	503AT	104AT
-50	24.46	55.66	154.6	329.5	1253	3168	11473	35	0.7229	1.424	3.508	6.940	13.06	32.48	60.94
-45	18.68	42.17	116.5	247.7	890.5	2257	7781	40	0.6189	1.211	2.961	5.827	10.65	26.43	48.10
-40	14.43	32.34	88.91	188.5	642.0	1632	5366	45	0.5316	1.033	2.509	4.911	8.716	21.59	38.13
-35	11.23	24.96	68.19	144.1	465.8	1186	3728	50	0.4587	0.8854	2.137	4.160	7.181	17.75	30.44
-30	8.834	19.48	52.87	111.3	342.5	872.8	2629	55	0.3967	0.7620	1.826	3.536	5.941	14.64	24.42
-25	6.998	15.29	41.21	86.43	253.6	646.3	1864	60	0.3446	0.6587	1.567	3.020	4.943	12.15	19.72
-20	5.594	12.11	32.44	67.77	190.0	484.3	1340	65	0.3000	0.5713	1.350	2.588	4.127	10.13	15.99
-15	4.501	9.655	25.66	53.41	143.2	364.6	969.0	70	0.2622	0.4975	1.168	2.228	3.464	8.482	13.05
-10	3.651	7.763	20.48	42.47	109.1	277.5	709.5	75	0.2285	0.4343	1.014	1.924	2.916	7.129	10.68
-5	2.979	6.277	16.43	33.90	83.75	212.3	523.3	80	0.1999	0.3807	0.8835	1.668	2.468	6.022	8.796
0	2.449	5.114	13.29	27.28	64.88	164.0	390.3	85	0.1751	0.3346	0.7722	1.451	2.096	5.105	7.271
5	2.024	4.188	10.80	22.05	50.53	127.5	292.5	90	0.1536	0.2949	0.6771	1.266	1.788	4.345	6.041
10	1.684	3.454	8.840	17.96	39.71	99.99	221.5	95			0.5961	1.108	1.530	3.712	5.037
15	1.408	2.862	7.267	14.69	31.36	78.77	168.6	100			0.5265	0.9731	1.315	3.185	4.220
20	1.184	2.387	6.013	12.09	24.96	62.56	129.5	105			0.4654	0.8572	1.134	2.741	3.546
25	1.000	2.000	5.000	10.00	20.00	50.00	100.0	110			0.4128	0.7576	0.9807	2.369	2.994
30	0.8486	1.684	4.179	8.313	16.12	40.20	77.81								


# ET THERMISTOR

The ET thermistor is smaller version of the AT thermistor. Its fast response time and high reliability makes it particularly suitable for use in medical equipment and thermometers. Manufactured by full-automated production line, all ET thermistors have identical size and that makes it possible to assemble sensors automatically.

## Part number

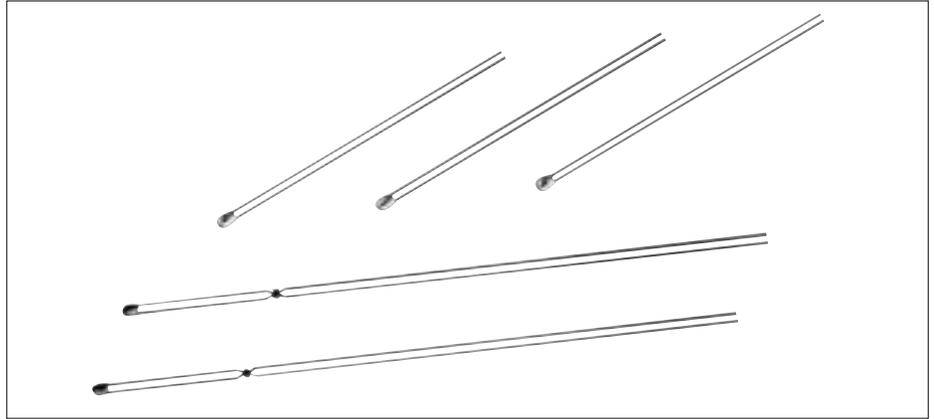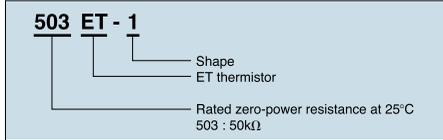

## Dimensions

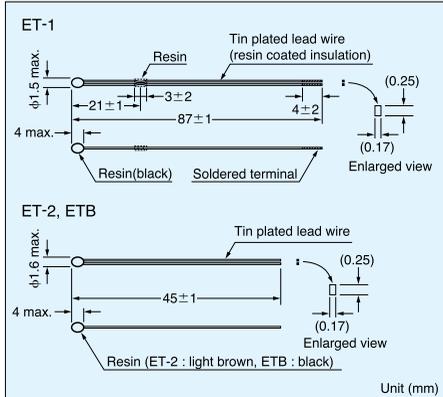

## Specifications


Part No.	R <sub>25</sub> *1	B value*2	Dissipation factor (mW/°C) Approx.	Thermal time constant (s)*3	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range (°C)
402ET-1(2)	4.0kΩ±3%	3100K±1%	0.7	6	3.5	-40~90
103ET-1(2)	10.0kΩ±3%	3250K±1%	0.7	6	3.5	-40~90
303ET-1(2)	30.0kΩ±3%	3760K±1%	0.7	6	3.5	-40~100
403ET-1(2)	40.0kΩ±3%	3525K±1%	0.7	6	3.5	-40~100
413ET-1(2)	41.0kΩ±3%	3435K±1%	0.7	6	3.5	-40~100
503ET-1(2)	50.0kΩ±3%	4055K±1%	0.7	6	3.5	-40~100
593ET-1(2)	59.0kΩ±3%	3617K±1%	0.7	6	3.5	-40~100
833ET-1(2)	83.0kΩ±3%	4013K±1%	0.7	6	3.5	-40~100
104ET-1(2)	100.0kΩ±3%	4132K±1%	0.7	6	3.5	-40~90
224ET-1(2)	226.0kΩ±3%	4021K±1%	0.7	6	3.5	-40~100
234ET-1(2)	232.0kΩ±3%	4274K±1%	0.7	6	3.5	-40~100
103ETB	10.0kΩ±2%	3435K±1%	0.7	6	3.5	-40~90

\*1 R<sub>25</sub>: Rated zero-power resistance value at 25°C.  
 \*2 B value: determined by rated zero-power resistance at 25°C and 85°C.  
 \*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.

## Resistance-Temperature

Temperature (°C)	Type											
	402ET	103ET	303ET	403ET	413ET	503ET	593ET	833ET	104ET	224ET	234ET	103ETB
-40	57.71	170.9	810.7	833.3	772.8	1602	1318	2664	3325	7005	9046	204.7
-30	35.34	102.2	445.1	481.1	456.5	855.0	754.3	1421	1769	3784	4680	118.5
-20	22.38	63.07	253.7	287.5	277.9	474.4	445.8	788.5	977.5	2116	2515	71.02
-10	14.60	40.08	149.8	177.2	174.1	272.7	271.7	453.0	559.0	1225	1401	43.67
0	9.797	26.16	91.30	112.4	111.7	161.9	170.1	269.3	329.8	730.1	808.2	27.70
10	6.737	17.51	57.31	73.00	73.63	99.13	109.4	164.8	200.5	447.8	480.2	18.07
20	4.736	11.99	37.00	48.61	49.57	62.38	72.10	103.6	125.3	282.1	293.7	12.11
30	3.394	8.387	24.47	33.08	34.08	40.24	48.55	66.91	80.27	182.1	184.4	8.301
40	2.476	5.988	16.56	22.96	23.89	26.58	33.41	44.18	52.62	120.3	118.6	5.811
50	1.835	4.353	11.45	16.26	17.06	17.93	23.44	29.80	35.23	81.07	78.00	4.147
60	1.378	3.217	8.070	11.70	12.38	12.33	16.73	20.51	24.00	55.75	52.39	3.011
70	1.049	2.414	5.791	8.569	9.135	8.588	12.15	14.37	16.59	39.01	35.87	2.224
80	0.7997	1.836	4.222	6.367	6.838	6.064	8.951	10.24	11.64	27.78	24.99	1.668
90	0.6145	1.416	3.125	4.797	5.190	4.338	6.697	7.419	8.287	20.10	17.72	1.267
100			2.346	3.662	3.990	3.142	5.077	5.459		14.75	12.75	

## Dimensions

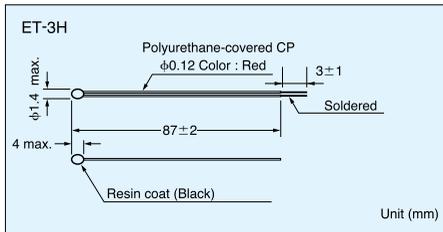

## Specifications

Part No.	R <sub>37</sub> *1	B value*2	Dissipation factor (mW/°C) Approx.	Thermal time constant (s)*3	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range (°C)
503ET-3H	29.615kΩ~30.263kΩ	3944K±0.5%	0.7	0.8	3.5	-40~100

\*1 R<sub>37</sub>: Rated zero-power resistance value at 37°C.  
 \*2 B value: determined by rated zero-power resistance at 30°C and 45°C.  
 \*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in oil.

## Tolerance of the group : ± 0.09% /group

Group	Resistance(kΩ)	Group	Resistance(kΩ)
C	29.615/29.641/29.667	I	29.937/29.964/29.991
D	29.668/29.695/29.721	J	29.992/30.018/30.045
E	29.722/29.749/29.775	K	30.046/30.073/30.100
F	29.776/29.802/29.828	L	30.101/30.127/30.154
G	29.829/29.856/29.883	M	30.155/30.182/30.209
H	29.884/29.910/29.936	N	30.210/30.237/30.263

Notes : Min./Center/Max.

# ACCURATE AXIAL TYPE THERMISTOR



SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com

## IT THERMISTOR


Our newly developed IT thermistors are axial leaded diode type packaged in high-density resin mold and featured strength against various operating environments.

We offer IT thermistor with  $\pm 2\%$  tolerance for a resistance value of 25°C and  $\pm 1\%$  for B value. IT thermistors are the most appropriate device for accurate temperature control below 100°C.



### Part number

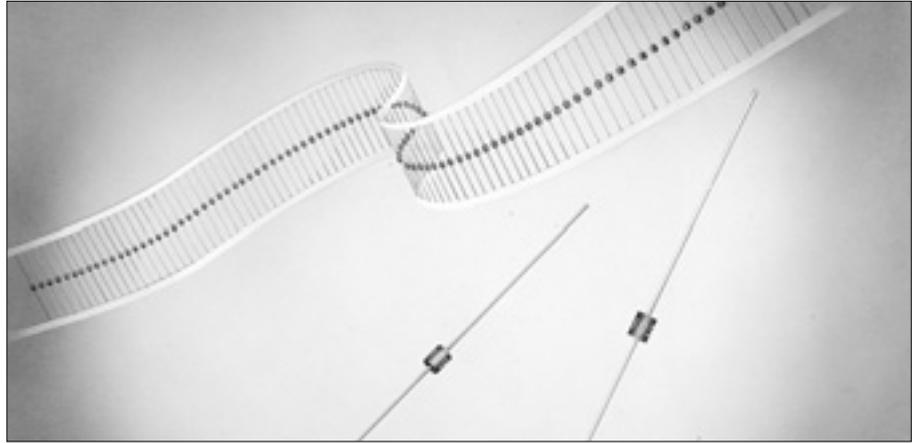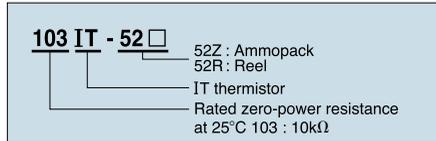


### Dimensions

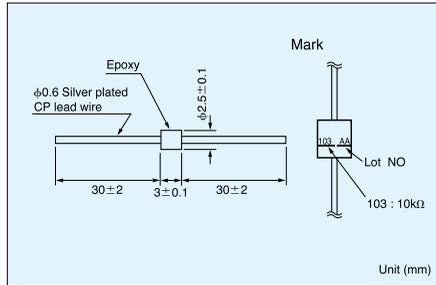

### Package

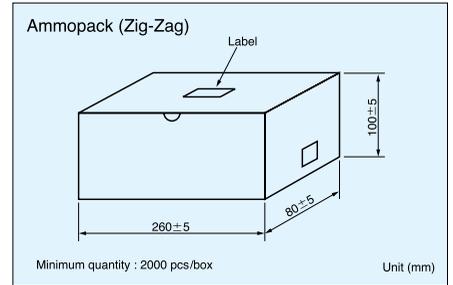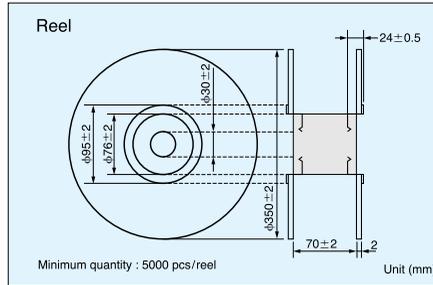

### Taping

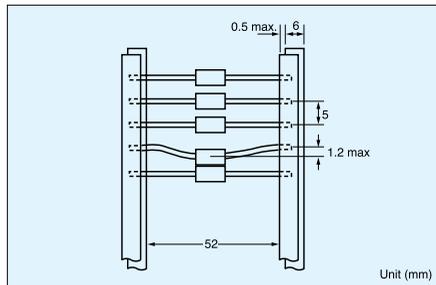

### Specifications

Part No.	R <sub>25</sub> *1	B value*2	Dissipation factor (mW/°C) Approx.	Thermal time constant(s) Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
302IT	3.0kΩ±2%	3860K±1%	3.6	13.5	18.0	-50~125
502IT	5.0kΩ±2%	3860K±1%	3.6	13.5	18.0	-50~125
103IT	10.0kΩ±2%	3435K±1%	3.6	13.5	18.0	-50~100
203IT	20.0kΩ±2%	3760K±1%	3.6	13.5	18.0	-50~125
303IT	30.0kΩ±2%	3760K±1%	3.6	13.5	18.0	-50~125
503IT	50.0kΩ±2%	4055K±1%	3.6	13.5	18.0	-50~125
104IT	100.0kΩ±2%	4390K±1%	3.6	13.5	18.0	-50~125

\*1 R<sub>25</sub> : Rated zero-power resistance value at 25°C,  $\pm 1\%$  and 3% are also available.

\*2 B value : determined by rated zero-power resistance at 25°C and 85°C.

\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.

### Resistance-Temperature

Temperature (°C)	Type								Temperature (°C)	Type							
	302IT	502IT	103IT	203IT	303IT	503IT	104IT	302IT		502IT	103IT	203IT	303IT	503IT	104IT		
-50	182.1	303.4	367.7	1026	1539	3135	9584	50	1.109	1.849	4.147	7.632	11.45	17.93	32.51		
-40	93.35	155.6	204.7	540.5	810.8	1602	4572	60	0.7744	1.291	3.011	5.380	8.070	12.33	21.61		
-30	49.85	83.09	118.5	296.7	445.1	855.0	2282	70	0.5513	0.9189	2.224	3.861	5.792	8.588	14.66		
-20	27.75	46.25	71.02	169.2	253.8	474.4	1191	80	0.4000	0.6667	1.668	2.815	4.223	6.064	10.13		
-10	16.02	26.70	43.67	99.85	149.8	272.7	647.2	90	0.2951	0.4918	1.267	2.083	3.125	4.338	7.135		
0	9.541	15.90	27.70	60.87	91.31	161.9	365.0	100	0.2210	0.3683	0.9753	1.564	2.346	3.142	5.111		
10	5.876	9.793	18.07	38.21	57.32	99.13	212.5	110	0.1680	0.2800		1.190	1.785	2.302	3.720		
20	3.728	6.214	12.11	24.66	36.99	62.38	127.7	120	0.1295	0.2158		0.9159	1.374	1.705	2.746		
30	2.431	4.051	8.301	16.31	24.47	40.24	78.88	125	0.1142	0.1903		0.8067	1.210	1.472	2.371		
40	1.623	2.705	5.811	11.04	16.56	26.58	50.03										

Unit (kΩ)

# SURFACE MOUNT TYPE THERMISTOR

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com




## HT THERMISTOR

HT thermistors are entirely new type of thermistor for surface mounting (by reflow soldering) and were acquired from advanced technology.

Our HT thermistors are adapted metal electrodes packaged in a resin mold, unlike conventional chip thermistors, and can offer  $\pm 2\%$  tolerance for a resistance value at 25°C.

HT series (SMD Thermistor) is not only compact-surface mounting type but also highly accurate and reliable.

### Part number

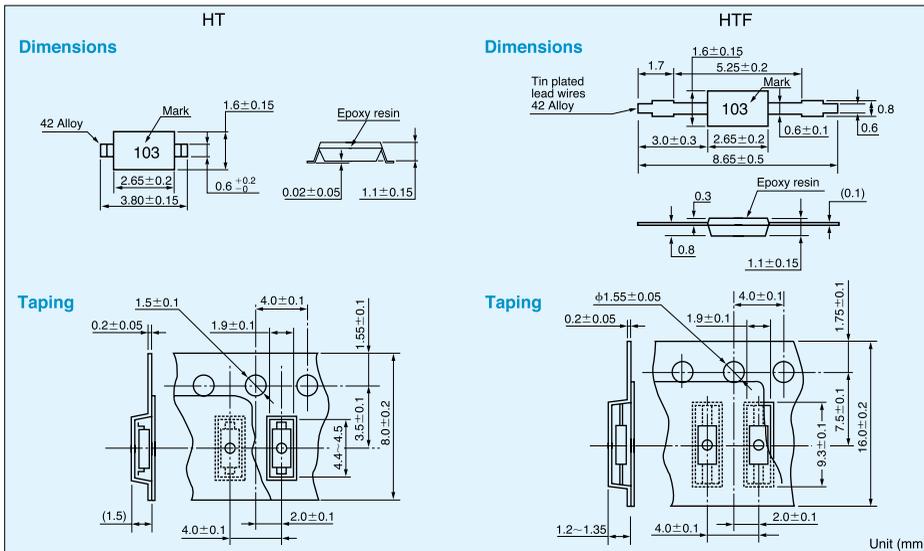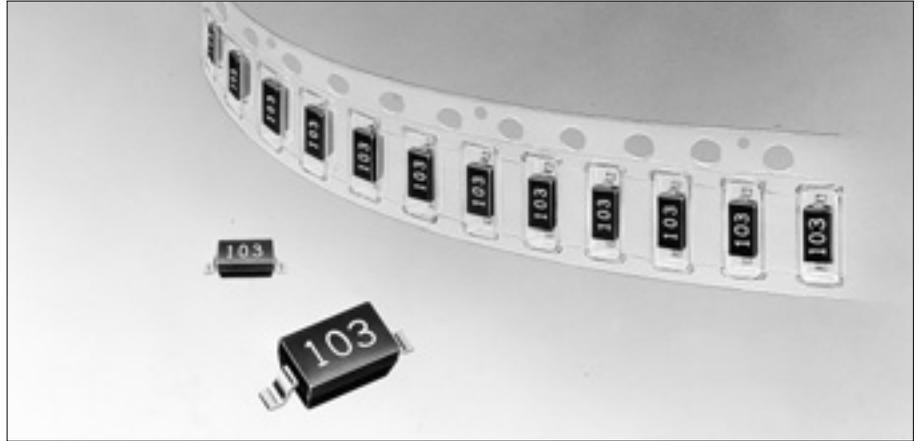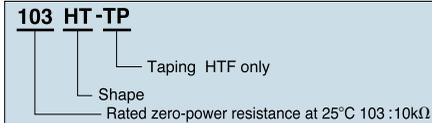

### Specifications

Minimum quantity: 3000pcs/reel

Part No.	R <sub>25</sub> *1	B value*2	Dissipation factor (mW/°C) Approx.	Thermal time constant(s)*3	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
302HT(F)	3.0kΩ±2%	3860K±1%	1.0	8.0	5.0	-50~125
502HT(F)	5.0kΩ±2%	3860K±1%	1.0	8.0	5.0	-50~125
103HT(F)	10.0kΩ±2%	3435K±1%	1.0	8.0	5.0	-50~100
203HT(F)	20.0kΩ±2%	3760K±1%	1.0	8.0	5.0	-50~125
303HT(F)	30.0kΩ±2%	3760K±1%	1.0	8.0	5.0	-50~125
503HT(F)	50.0kΩ±2%	4055K±1%	1.0	8.0	5.0	-50~125
104HT(F)	100.0kΩ±2%	4390K±1%	1.0	8.0	5.0	-50~125

\*1 R<sub>25</sub>: Rated zero-power resistance value at 25°C,  $\pm 1\%$  and 3% are also available.

\*2 B value: determined by rated zero-power resistance at 25°C and 85°C.

\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.

### Resistance-Temperature



Temperature (°C)	Type								Temperature (°C)	Type							
	302HT	502HT	103HT	203HT	303HT	503HT	104HT	302HT		502HT	103HT	203HT	303HT	503HT	104HT		
-50	182.1	303.4	367.7	1026	1539	3135	9584	50	1.109	1.849	4.147	7.632	11.45	17.93	32.51		
-40	93.35	155.6	204.7	540.5	810.8	1602	4572	60	0.7744	1.291	3.011	5.380	8.070	12.33	21.61		
-30	49.85	83.09	118.5	296.7	445.1	855.0	2282	70	0.5513	0.9189	2.224	3.861	5.792	8.588	14.66		
-20	27.75	46.25	71.02	169.2	253.8	474.4	1191	80	0.4000	0.6667	1.668	2.815	4.223	6.064	10.13		
-10	16.02	26.70	43.67	99.85	149.8	272.7	647.2	90	0.2951	0.4918	1.267	2.083	3.125	4.338	7.135		
0	9.541	15.90	27.70	60.87	91.31	161.9	365.0	100	0.2210	0.3683	0.9753	1.564	2.346	3.142	5.111		
10	5.876	9.793	18.07	38.21	57.32	99.13	212.5	110	0.1680	0.2800		1.190	1.785	2.302	3.720		
20	3.728	6.214	12.11	24.66	36.99	62.38	127.7	120	0.1295	0.2158		0.9159	1.374	1.705	2.746		
30	2.431	4.051	8.301	16.31	24.47	40.24	78.88	125	0.1142	0.1903		0.8067	1.210	1.472	2.371		
40	1.623	2.705	5.811	11.04	16.56	26.58	50.03										

Unit (kΩ)


# FL THERMISTOR

The FL Thermistor is developed on technology of the FT Thermistor. The FL Thermistor has "lead-wings" that makes mounting on the boards much easier.

## Part number

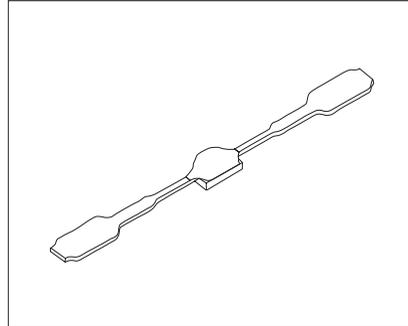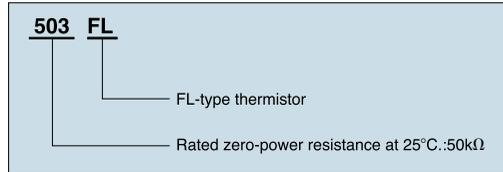

## Dimensions

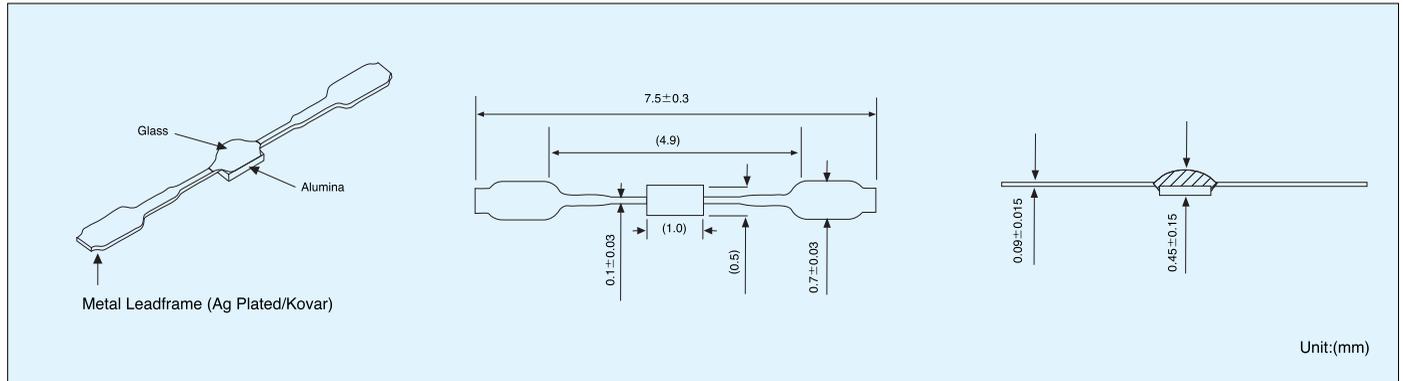

## Specifications


Part No.	R	B value*1	Dissipation factor*2	Thermal time constant*2	Category temp. range
			(mW/°C) Approx.	(s) Approx.	(°C)
364FL	7kΩ±5% (at 180°C)	3370K±1.5%	0.4	1.5	-40~350
503FL	50kΩ±5% (at 25°C)				
103FL	10kΩ±5% (at 25°C)				

\*1 : B-value:determined by zero-power resistance at 25°C and 85°C  
\*2 : in still air


## FT THERMISTOR

The FT thermistors, the highly reliable thermistors, are characterized by their fast response time, which was made possible by the miniaturization of the thermistor dimensions. FT thermistors are also heat-resistant type. FT thermistors are the most excellent products of today's chip thermistors manufacturing.

### Part number

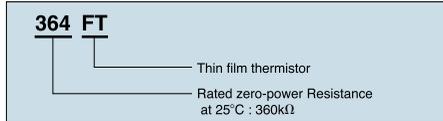

### Dimensions

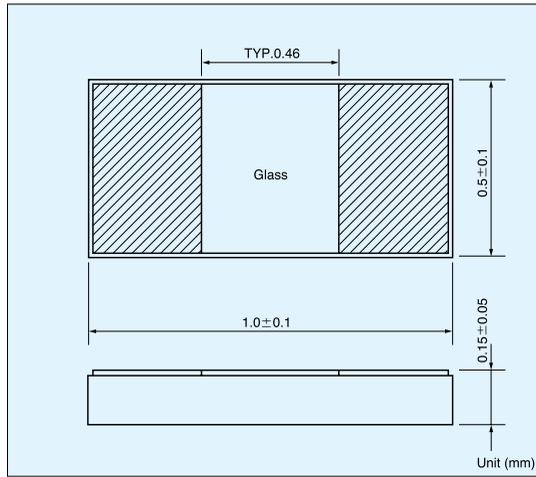

Electrode type	Connection method
Pt	Conductive resins
Au	Wire-bonding
Au/Ni	Solder

We can also custom-make FT THERMISTOR to better suit your applications. Please consult our sales staff.

### Specifications

Part No.	$R_{25}^{*1}$	B value <sup>*2</sup>	Dissipation factor (mW/°C) Approx.	Thermal time constant(s) <sup>*3</sup> Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
103FT	10kΩ ± 5%	3435K ± 1%	0.3	2.0	1.5	-40~250
103FT	10kΩ ± 5%	3370K ± 1%	0.3	2.0	1.5	-40~250
503FT	50kΩ ± 5%	3435K ± 1%	0.3	2.0	1.5	-40~250
503FT	50kΩ ± 5%	3370K ± 1%	0.3	2.0	1.5	-40~250
364FT	360kΩ ± 5%	3370K ± 1%	0.3	2.0	1.5	-40~250

\*1  $R_{25}$  : Rated zero-power resistance value at 25°C.

\*2 B value : determined by rated zero-power resistance at 25°C and 85°C.

\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.

### Resistance-Temperature

Temperature (°C)	P/N					Temperature (°C)	P/N				
	103FT		503FT		364FT		103FT		503FT		364FT
	B=3370K	B=3435K	B=3370K	B=3435K	B=3370K		B=3370K	B=3435K	B=3370K	B=3435K	B=3370K
-40	187.9	200.7	939.3	1002	6763	110	0.8003	0.7662	4.002	3.829	28.81
-30	110.7	117.0	553.4	584.7	3984	120	0.6345	0.6064	3.172	3.029	22.84
-20	67.26	70.34	336.3	351.9	2421	125	0.5671	0.5418	2.836	2.706	20.42
-10	42.10	43.55	210.5	217.7	1516	130					18.30
0	27.07	27.71	135.3	138.5	974.8	140					14.81
10	17.86	18.11	89.31	90.48	643.0	150					12.09
20	12.07	12.12	60.33	60.58	434.4	160					9.963
25	10.00	10.00	50.00	50.00	360.0	170					8.274
30	8.332	8.299	41.66	41.50	299.9	180					6.925
40	5.871	5.804	29.36	29.03	211.4	190					5.837
50	4.216	4.139	21.08	20.70	151.8	200					4.954
60	3.081	3.006	15.40	15.04	110.9	210					4.232
70	2.288	2.220	11.44	11.11	82.36	220					3.636
80	1.725	1.666	8.623	8.331	62.09	230					3.142
90	1.318	1.269	6.592	6.344	47.46	240					2.731
100	1.021	0.9797	5.105	4.898	36.76	250					2.385



Unit (kΩ)

## SMD type chip

Chip thermistors are specially processed, highly reliable thermistors.

They can be face-bonded to act as thermal compensators for ICs and they are manufactured in sizes down to 1 square mm, they can also be used to detect temperature with relatively small time constants.


### KT-type Part number

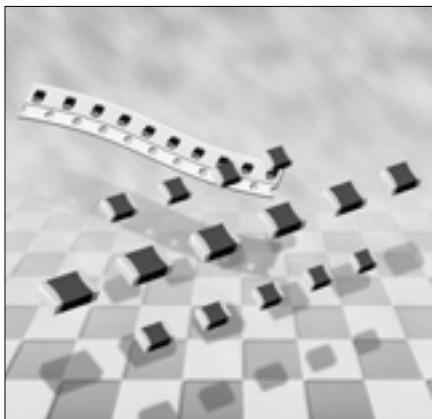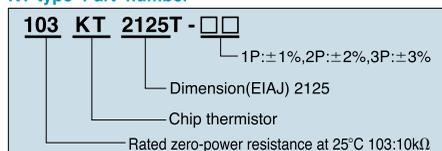


### Precautions

- Do not expose the thermistors to high soldering heat for more than specified time. (260°C for not longer than 10s is recommended)


### Dimensions

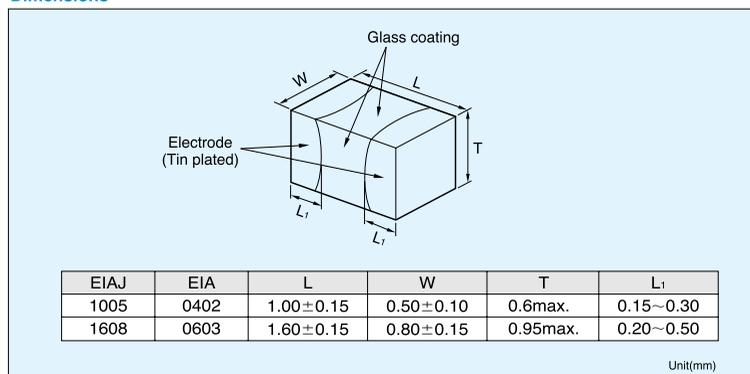

### Reflow soldering profile

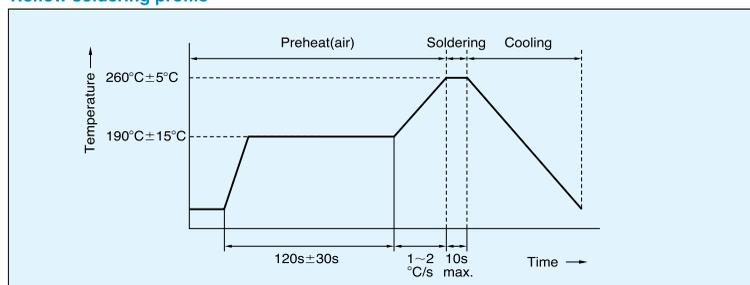


### Taping (2125, 1608 type)

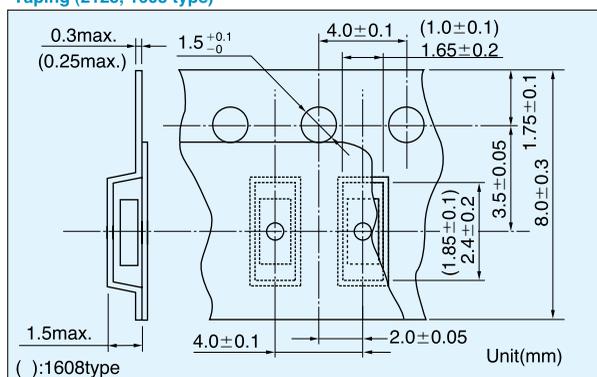

Minimum quantity:4000pcs/reel

### (1005 type)

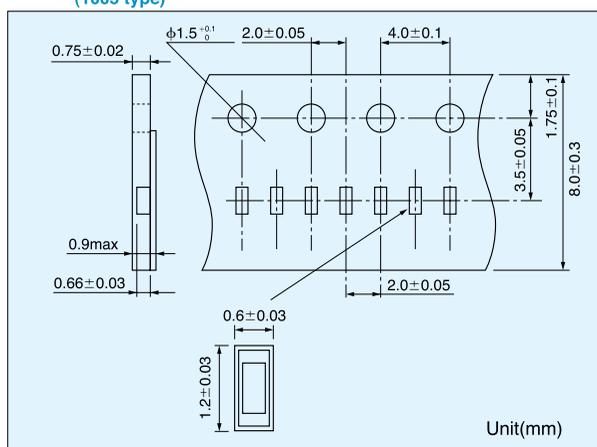

Minimum quantity:10000pcs/reel

### Specifications

Part No.	R <sub>25</sub> <sup>*1</sup>	B value <sup>*2</sup>	Dissipation factor (mW/°C) Approx.	Thermal time constant(s) <sup>*3</sup> Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
103KT1608T	10kΩ	3435K±1%	0.9	5.0	4.5	-40~125
503KT1608T	50kΩ	4055K±1%	0.9	5.0	4.5	-40~125
104KT1608T	100kΩ	4390K±1%	0.9	5.0	4.5	-40~125
103KT1005T	10kΩ	3435K±1%	0.7	2.2	3.5	-40~125


\*1 R<sub>25</sub>: Rated zero-power resistance value at 25°C.

\*2 B value: determined by rated zero-power resistance at 25°C and 85°C.


\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air. Other resistance is available, please ask.

# ML(Multi layer) - type


## Part number

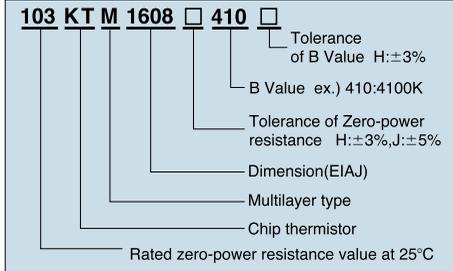

## Dimensions

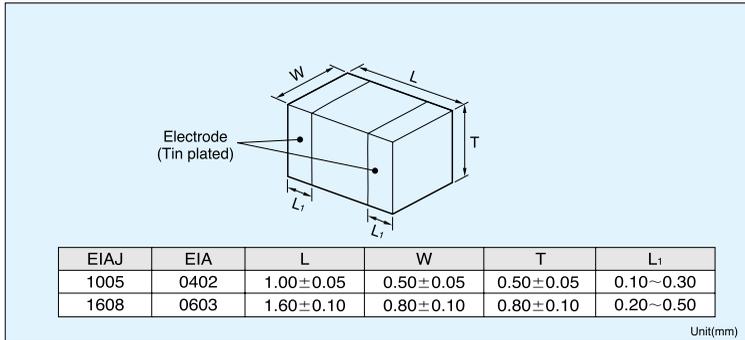


## Reflow soldering profile

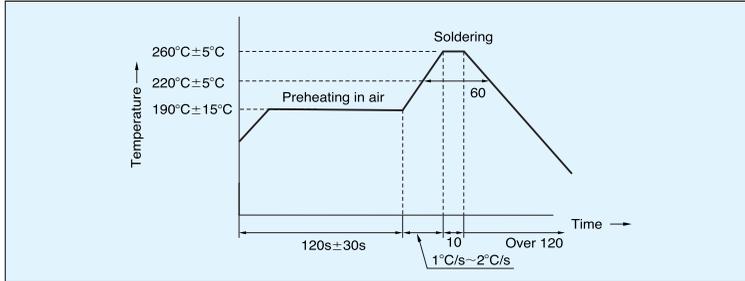


## Specifications

Part No.	Rating		Characteristic			
	R <sub>25</sub> ±3%	B <sub>25</sub> ±3%	Dissipation factor mW/°C Approx.(in still air)	Thermal time constant s Approx.(in still air)	Rated maximum power dissipation (at 25°C) mW	Category temperature range °C
	Ω	K				
221KTM1005H365H	220	3650	0.7	2.2	70	-40~125
331KTM1005H365H	330					
471KTM1005H365H	470					
681KTM1005H365H	680					
102KTM1005H410H	1.0k					
152KTM1005H410H	1.5k					
202KTM1005H410H	2.0k					
222KTM1005H410H	2.2k					
302KTM1005H410H	3.0k					
332KTM1005H410H	3.3k					
472KTM1005H410H	4.7k	4100	0.7	2.2	70	-40~125
502KTM1005H410H	5.0k					
682KTM1005H410H	6.8k					
103KTM1005H410H	10k					
153KTM1005H410H	15k					
303KTM1005H410H	30k					
473KTM1005H410H	47k					
683KTM1005H420H	68k					
104KTM1005H420H	100k					
154KTM1005H420H	150k					
204KTM1005H420H	200k	4200	0.7	2.2	70	-40~125
220KTM1005H325H	22					
330KTM1005H325H	33					
470KTM1005H325H	47					
680KTM1005H325H	68					
101KTM1005H325H	100					
151KTM1005H325H	150					

## Taping ( 1608 type)

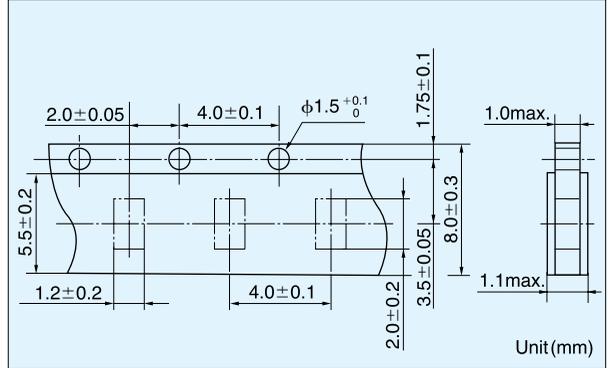

## (1005 type)

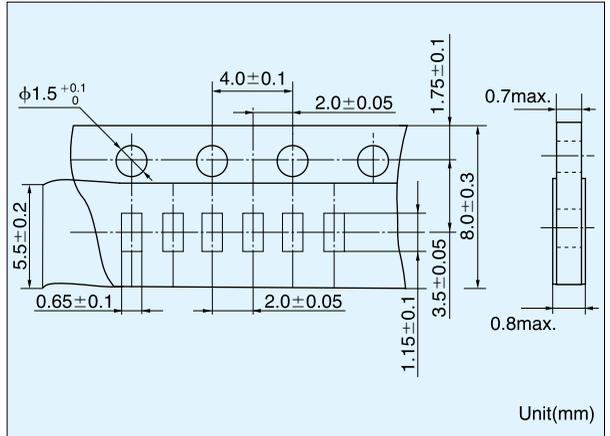

Part No.	Rating		Characteristic			
	R <sub>25</sub> ±3%	B <sub>25</sub> ±3%	Dissipation factor mW/°C Approx.(in still air)	Thermal time constant s Approx.(in still air)	Rated maximum power dissipation (at 25°C) mW	Category temperature range °C
	Ω	K				
221KTM1608H365H	220	3650	0.9	5.0	90	-40~125
331KTM1608H365H	330					
471KTM1608H365H	470					
681KTM1608H365H	680					
102KTM1608H410H	1.0k					
152KTM1608H410H	1.5k					
222KTM1608H410H	2.2k					
332KTM1608H410H	3.3k					
472KTM1608H410H	4.7k					
502KTM1608H396H	5.0k					
682KTM1608H410H	6.8k	4100	0.9	5.0	90	-40~125
103KTM1608H410H	10k					
153KTM1608H410H	15k					
303KTM1608H410H	30k					
473KTM1608H410H	47k					
683KTM1608H420H	68k					
104KTM1608H420H	100k					
154KTM1608H420H	150k					
204KTM1608H420H	200k					
220KTM1608H325H	22					
330KTM1608H325H	33	4200	0.9	5.0	90	-40~125
470KTM1608H325H	47					
680KTM1608H325H	68					
101KTM1608H325H	100					
151KTM1608H325H	150					

# HIGH HEAT-RESISTANCE AND HIGH SENSITIVE THERMISTOR


SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com

## GT THERMISTOR


GT thermistor is combined both superior feature of BT thermistor and ET thermistor as fast response time, high reliability, wide category temperature range, high moisture proof, high accuracy and reasonable price.

GT thermistor is made up of a high quality thermistor element and the lead wire is connected to the thermistor element by alloyed technology, and glass coating for the thermistor element.



### Part number

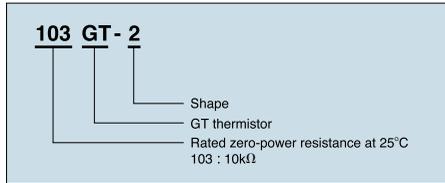

### Dimensions

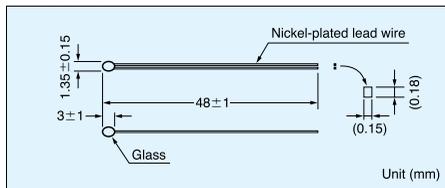

### Time constant

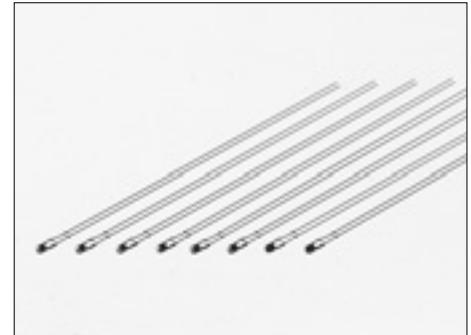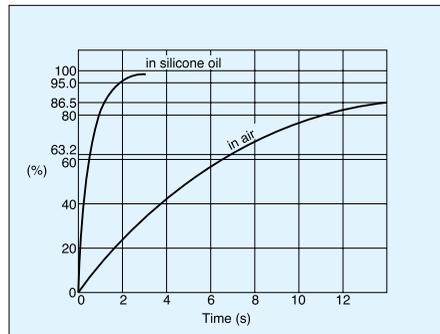

### Specifications

Part No.	R <sub>25</sub> *1	B value*2	Dissipation factor (mW/°C) Approx.	Thermal time constant(s)*3 Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
102GT-2	1.0kΩ±3%	3305K±2%	0.6	7(0.6)	3	-50~200
202GT-2	2.0kΩ±3%	3838K±2%	0.6	7(0.6)	3	-50~300
502GT-2	5.0kΩ±3%	3964K±2%	0.6	7(0.6)	3	-50~300
103GT-2	10.0kΩ±3%	4126K±2%	0.6	7(0.6)	3	-50~300
203GT-2	20.0kΩ±3%	4282K±2%	0.6	7(0.6)	3	-50~300
503GT-2	50.0kΩ±3%	4288K±2%	0.6	7(0.6)	3	-50~300
104GT-2	100.0kΩ±3%	4267K±2%	0.6	7(0.6)	3	-50~300
204GT-2	200.0kΩ±3%	4338K±2%	0.6	7(0.6)	3	-50~300
504GT-2	500.0kΩ±3%	4526K±2%	0.6	7(0.6)	3	-50~300
105GT-2	1000.0kΩ±3%	4608K±2%	0.6	7(0.6)	3	-50~300

### Resistance-Temperature

Part No.	Rated zero-power resistance	B value*2	Dissipation factor (mW/°C) Approx.	Thermal time constant(s)*3 Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
852GT-2-20155	R50=3.485kΩ±5%	B0/100=3450K±2%	0.6	7(0.6)	3	-50~300
852GT-2-20156	R50=3.485kΩ±3%	B0/100=3450K±2%	0.6	7(0.6)	3	-50~300
493GT-2-20157	R5=127kΩ±2%	B0/100=3970K±2%	0.6	7(0.6)	3	-50~300
493GT-2-20158	R5=127kΩ±1.5%	B0/100=3970K±2%	0.6	7(0.6)	3	-50~300
493GT-2-20159	R75=7.214kΩ±3%	B0/100=3970K±2%	0.6	7(0.6)	3	-50~300
542GT-2-20184	R75=0.7331kΩ±3%	B0/100=3450K±2%	0.6	7(0.6)	3	-50~300
252GT-2-20185	R0=6kΩ±5%	B0/100=3390K±2%	0.6	7(0.6)	3	-50~300
542GT-2-20186	R0=15kΩ±3%	B0/100=3450K±2%	0.6	7(0.6)	3	-50~300
542GT-2-20187	R0=15kΩ±2.5%	B0/100=3450K±2%	0.6	7(0.6)	3	-50~300
493GT-2-20188	R40=26.06kΩ±2%	B0/100=3970K±2%	0.6	7(0.6)	3	-50~300
234GT-2-20194	R25=231.44kΩ±3%	B100/200=4537K±1%	0.6	7(0.6)	3	-50~300
234GT-2-20195	R150=3.161kΩ±3%	B100/200=4537K±2%	0.6	7(0.6)	3	-50~300
103GT-2-20196	R25=10kΩ±1%	B25/85=3435K±1%	0.6	7(0.6)	3	-50~300
252GT-2-20197	R25=2.5kΩ±2.5%	B0/100=3390K±2%	0.6	7(0.6)	3	-50~300
262GT-2-20198	R0=8kΩ±1%	B25/50=3745K±2%	0.6	7(0.6)	3	-50~300
103GT-2-20199	R25=10kΩ±5%	B25/125=3980K±2%	0.6	7(0.6)	3	-50~300
104GT-2-20201	R25=100kΩ±3%	B100/200=4300K±3%	0.6	7(0.6)	3	-50~300
145GT-2-20203	R200=4kΩ±5%	B200/300=5133K±3%	0.6	7(0.6)	3	-50~300
333GT-2-20204	R125=1.509kΩ±3%	B0/100=3570K±2%	0.6	7(0.6)	3	-50~300
303GT-2-20205	R25=30kΩ±3%	B0/100=3970K±2%	0.6	7(0.6)	3	-50~300

\*1 R<sub>25</sub>: Rated zero-power resistance value at 25°C.


\*2 B value: determined by rated zero-power resistance at 25°C and 85°C.

\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air. (silicone oil)



# BT THERMISTOR

The BT thermistor is a small thermal sensing device providing high reliability, stable characteristics and a wide operating range of -50°C to 300°C. It is used in various applications including medical apparatus, industrial equipment and home electric appliances.

## Part number



## Dimensions

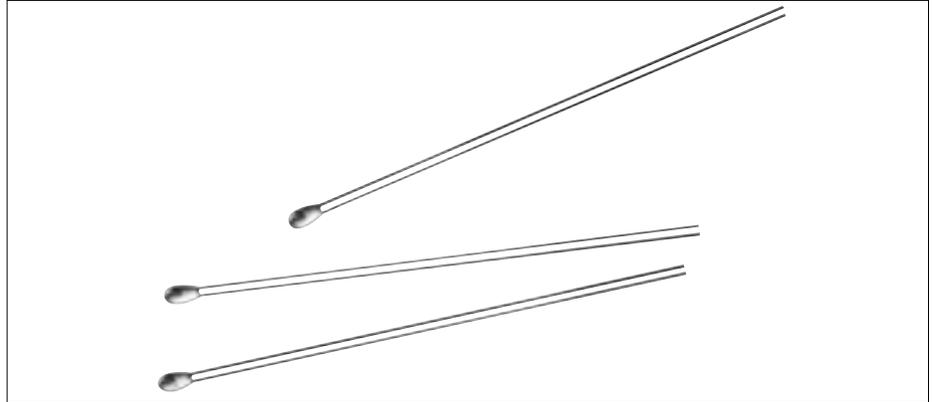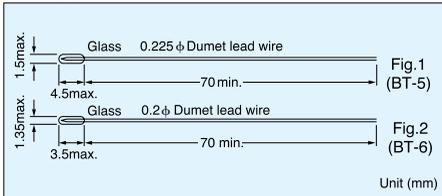

## Specifications

Part No.	R <sub>25</sub> <sup>1</sup>	B value <sup>2</sup>	Dissipation factor (mW/°C) Approx.	Thermal time constant(s) <sup>3</sup> Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
1BT-5	1.000kΩ±10%	3,250K±3%	0.5	4~12	2.5	-50~150
2BT-5	2.000kΩ±10%	3,420K±3%	0.5	4~12	2.5	-50~300
5BT-5(6)	5.000kΩ±10%	3,450K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300
9BT-5(6)	9.000kΩ±10%	3,470K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~150
10BT-5(6)	10.00kΩ±10%	3,250K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300
20BT-5(6)	20.00kΩ±10%	3,330K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300
30BT-5(6)	30.00kΩ±10%	3,450K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300
40BT-5(6)	40.00kΩ±10%	3,550K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300
100BT-5(6)	100.0kΩ±10%	3,750K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300
400BT-5(6)	400.0kΩ±10%	4,050K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300
500BT-5(6)	500.0kΩ±10%	3,760K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300
1.3MBT-5(6)	1300kΩ±10%	4,380K±3%	0.5(0.4)	4~12(3~8)	2.5(2)	-50~300

\*1 R<sub>25</sub>: Rated zero-power resistance value at 25°C, ±5% are also available.

\*2 B value: determined by rated zero-power resistance at 25°C and 85°C.

\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air

## Resistance-Temperature



Temperature (°C)	Type											
	1BT	2BT	5BT	9BT	10BT	20BT	30BT	40BT	100BT	400BT	500BT	1.3MBT
-50	29.87	70.71		344.8	284.8	686.7			4860			
-40	17.33	40.02		190.3	163.4	383.1			2599	11043		
-30	10.35	23.28		109.1	97.62	222.6			1439	6198		
-20	6.374	13.96	35.44	64.81	60.41	134.2		306.8	827.4	3573		
-10	4.038	8.640	21.84	39.70	38.63	83.61		184.7	491.1	2109		8066
0	2.629	5.513	13.87	25.15	25.45	53.75	83.80	115.0	301.4	1274	1486	4598
10	1.755	3.610	9.057	16.36	17.22	35.53	54.46	73.88	190.1	788.4	945.3	2718
20	1.200	2.421	6.060	10.92	11.92	24.09	36.37	48.77	123.1	498.7	614.7	1652
25	1.000	2.000	5.000	9.000	10.00	20.00	30.00	40.00	100.0	400.0	500.0	1300
30	0.8380	1.661	4.148	7.456	8.434	16.70	24.88	33.00	81.71	322.4	408.9	1029
40	0.5973	1.163	2.898	5.200	6.084	11.81	17.39	22.82	55.39	212.8	277.7	656.0
50	0.4338	0.8311	2.065	3.698	4.456	8.511	12.40	16.10	38.31	143.3	192.1	427.8
60	0.3205	0.6043	1.497	2.677	3.303	6.248	8.990	11.57	27.00	98.24	135.3	284.5
70	0.2407	0.4468	1.104	1.970	2.460	4.658	6.629	8.457	19.38	68.52	96.90	193.0
80	0.1834	0.3357	0.8267	1.473	1.850	3.522	4.962	6.279	14.14	48.50	70.47	133.0
90	0.1417	0.2559	0.6280	1.117	1.405	2.698	3.767	4.730	10.48	34.91	52.00	92.76
100	0.1110	0.1978	0.4836	0.8581	1.078	2.093	2.897	3.611	7.866	25.47	38.90	65.53
110	0.08789	0.1547	0.3771	0.6685	0.8355	1.640	2.255	2.792	5.968	18.83	29.49	46.91
120		0.1224	0.2975	0.5264	0.6540	1.296	1.774	2.182	4.580	14.10	22.63	34.03
130		0.09789	0.2373	0.4191	0.5171	1.027	1.410	1.727	3.551	10.68	17.55	25.02
140		0.07908	0.1913	0.3369	0.4126	0.8190	1.130	1.378	2.782	8.180	13.76	18.59
150		0.06450	0.1556	0.2735	0.3321	0.6581	0.9113	1.107	2.201	6.332	10.90	13.99
160			0.1278		0.2696	0.5327	0.7374	0.8943	1.757	4.957	8.717	10.63
170			0.1058		0.2207	0.4345	0.5997	0.7252	1.416	3.915	7.034	8.163
180			0.08836		0.1818	0.3567	0.4909	0.5915	1.150	3.120	5.722	6.336
190			0.07432		0.1508	0.2947	0.4048	0.4859	0.9418	2.508	4.692	4.965
200			0.06295		0.1258	0.2451	0.3360	0.4018	0.7770	2.032	3.876	3.926
210					0.1056	0.2052	0.2808	0.3344	0.6458	1.658	3.225	3.131
220							0.2360	0.2802	0.5403	1.363	2.702	2.517
230							0.1995	0.2361	0.4551	1.127	2.277	2.039
240							0.1695	0.2000	0.3855	0.9390	1.930	1.663
250							0.1447	0.1704	0.3286	0.7864	1.644	1.366
260							0.1243	0.1458	0.2816	0.6626	1.407	1.129
270							0.1072	0.1255	0.2426	0.5613	1.209	0.9398
280							0.09283	0.1084	0.2100	0.4780	1.041	0.7871
290							0.08078	0.09408	0.1826	0.4091	0.8995	0.6628
300							0.07060	0.08200	0.1595	0.3518	0.7810	0.5612

Unit(KΩ)


# CT THERMISTOR

The CT thermistor is a thermal sensor in a DO35 package. Similar to the BT thermistor, it is highly reliable and offers a wide operating range of  $-50^{\circ}\text{C}$  to  $(150^{\circ}\text{C})$   $250^{\circ}\text{C}$ . It is primarily used in home electric appliances and features a competitive price for full-automated manufacturing system.

## Part number

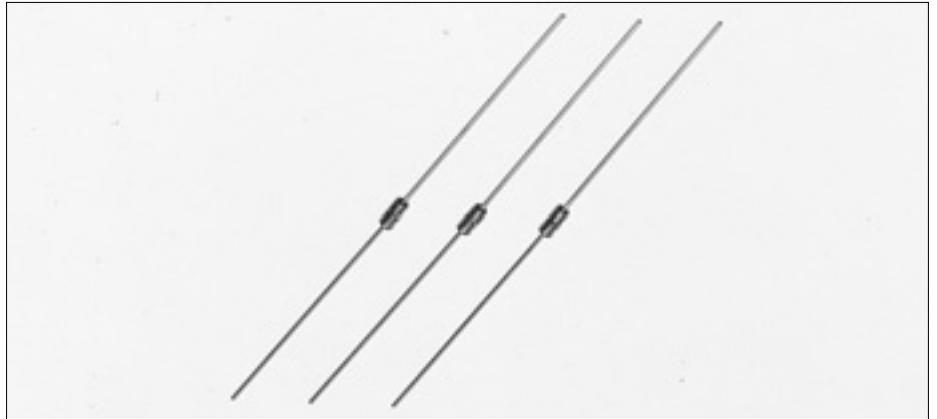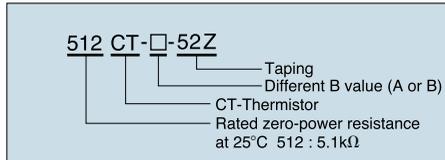


## Dimensions

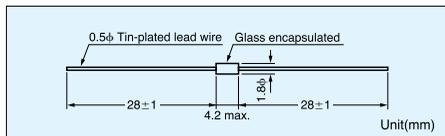

To allow automatic insertion, this product can be taped.

## Taping Specification

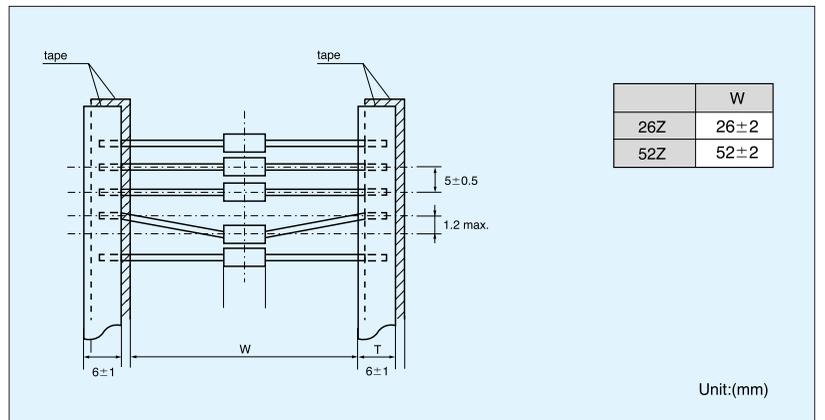

## Resistance-Temperature

Part No.	$R_{25}^{*1}$	B value <sup>*2</sup>	Dissipation factor (mW/°C) Approx.	Thermal time constant(s) <sup>*3</sup> Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C) <sup>*4</sup>
252CT	2.5kΩ±5%	3800K±2%	2.0	16	250	-40~(150)250
302CT	3.0kΩ±5%	3750K±2%	2.0	16	250	-40~(150)250
502CT-A	5.0kΩ±5%	3450K±2%	2.0	16	250	-40~(150)250
502CT-B	5.0kΩ±5%	3950K±2%	2.0	16	250	-40~(150)250
902CT	9.0kΩ±5%	3700K±2%	2.0	16	250	-40~(150)250
103CT-A	10.0kΩ±5%	3700K±2%	2.0	16	250	-40~(150)250
103CT-B	10.0kΩ±5%	3950K±2%	2.0	16	250	-40~(150)250
203CT-A	20.0kΩ±5%	3700K±2%	2.0	16	250	-40~(150)250
203CT-B	20.0kΩ±5%	3950K±2%	2.0	16	250	-40~(150)250
503CT	50.0kΩ±5%	3950K±2%	2.0	16	250	-40~(150)250
104CT	100.0kΩ±5%	3950K±2%	2.0	16	250	-40~(150)250
204CT	200.0kΩ±5%	4150K±2%	2.0	16	250	-40~(150)250
504CT	500.0kΩ±5%	4300K±2%	2.0	16	250	-40~(150)250

\*1  $R_{25}$  : Rated zero-power resistance value at 25°C.


\*2 B value : determined by rated zero-power resistance at 25°C and 50°C.

\*3 Time when thermistor reaches 63.2% of the temperature difference. The value is measured in the air.


## TEMPERATURE COMPENSATION D THERMISTOR

The D thermistor, based on resistance changes, is used in transistor, coil and other temperature compensating circuits found in TV's, radio, etc.


### Part number

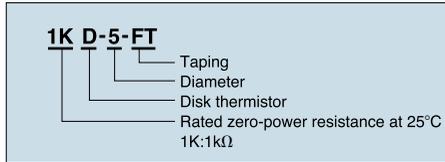

### Dimensions

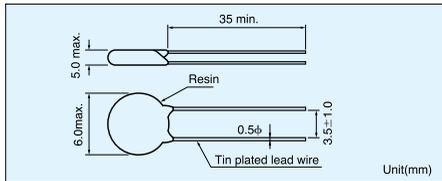

### Taping

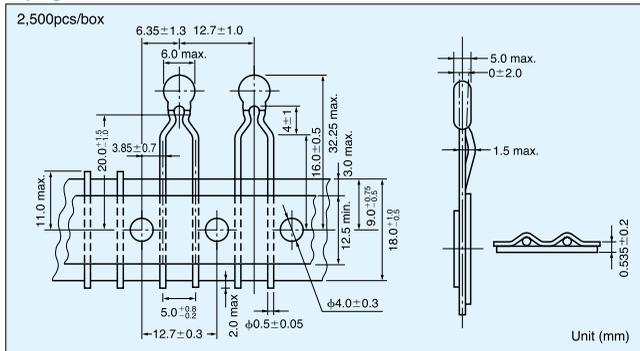

### Specifications

Part No.	R25*1	B value*2	Dissipation factor (mW/°C) Approx.	Thermal time constant(s)*3 Approx.	Rated maximum power dissipation (at 25°C)(mW)	Category temp. range(°C)
50D-5	50.0Ω±15%	3250K±5%	3.5	13	297	-40~+110
80D-5	80.0Ω±15%	3300K±5%	3.5	13	297	-40~+110
100D-5	100.0Ω±15%	3300K±5%	3.5	13	297	-40~+110
200D-5	200.0Ω±15%	3400K±5%	3.5	13	297	-40~+110
250D-5	250.0Ω±15%	3450K±5%	3.5	13	297	-40~+110
300D-5	300.0Ω±15%	3500K±5%	3.5	13	297	-40~+110
360D-5	360.0Ω±15%	3550K±5%	3.5	13	297	-40~+110
500D-5	500.0Ω±15%	3650K±5%	3.5	13	297	-40~+110
800D-5	800.0Ω±15%	3850K±5%	3.5	13	297	-40~+110
1KD-5	1.0kΩ±15%	3950K±5%	3.5	13	297	-40~+110
1.5KD-5	1.5kΩ±15%	3950K±5%	3.5	13	297	-40~+110
2KD-5	2.0kΩ±15%	4000K±5%	3.5	13	297	-40~+110
5KD-5	5.0kΩ±15%	4100K±5%	3.5	13	297	-40~+110
8KD-5	8.0kΩ±15%	4200K±5%	3.5	13	297	-40~+110
10KD-5	10.0kΩ±15%	4200K±5%	3.5	13	297	-40~+110
15KD-5	15.0kΩ±15%	4250K±5%	3.5	13	297	-40~+110
20KD-5	20.0kΩ±15%	4300K±5%	3.5	13	297	-40~+110
25KD-5	25.0kΩ±15%	4300K±5%	3.5	13	297	-40~+110
50KD-5	50.0kΩ±15%	4650K±5%	3.5	13	297	-40~+110
100KD-5	100.0kΩ±15%	4850K±5%	3.5	13	297	-40~+110

\*1 R25 : Rated zero-power resistance value at 25°C, ±10% are also available.

\*2 B value : determined by rated zero-power resistance at 25°C and 85°C.


\*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.



# POWER THERMISTOR

The POWER THERMISTOR is a device for suppressing inrush current to an electric circuit. Circuits including electric bulbs or capacitors induce an inrush current more than 100 times the normal current when the circuit switch is turned on. The POWER THERMISTOR in the circuits protects electric equipments from being damaged by limiting the inrush current.

MARK II is a NEW POWER THERMISTOR featuring smaller size and larger energy capacity to meet severe requirements in inrush current suppression. There is the tendency of miniaturization in low power switching power supply, and MARK II is effectively applicable for the needs, though the comparatively larger sized fixed resistors (ceramic coat) are used now.

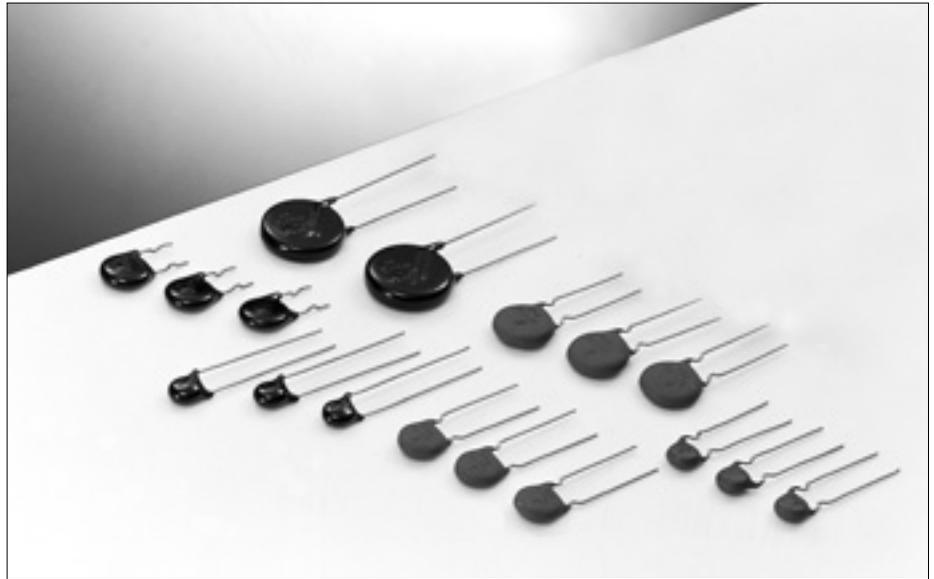


## Application

The power thermistor will suppress inrush current which is caused by a capacitor, filament for a bulb, inverter for fluorescent lamp, a heater and etc., also will control fan motor speed of cooler for electric circuit.

Especially MARK II was developed to use for power supply of TV, VCR instead of cement resistor.

## How to use the power thermistor

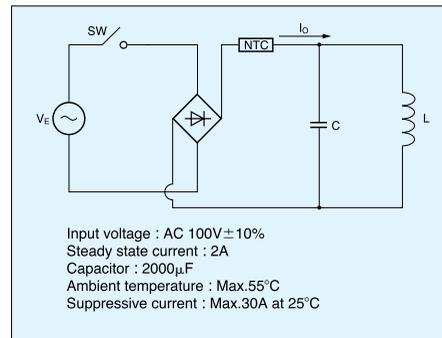

The most suitable power thermistor for the above circuit is required to fulfill the following terms and conditions.

1. The permissible current at ambient temperature of 55°C should be over 2A.
2. The thermistor resistance for suppressive current which becomes below 30A should be over 4.2 ohm from the under-mentioned formula.

$$\frac{\sqrt{2} V_E \times 1.1}{R_C + R_{25}} \leq 30$$


$R_C$  : Internal resistance value in the circuit is 1 ohm (100V/100A)

$R_{25}$  : Rated zero-power resistance at 25°C

3. Max. capacitance shall be over 2000μF at AC 100V.

Accordingly, suitable thermistors are 6D-22, 5D-18 and 8D-18, and if we consider in the points of small time constant which means a small size and large effect for suppressive current which means large rated zero-power resistance, 8D-18 is the most suitable one.

Use the following circuit in the power supply for 100V and 200V.

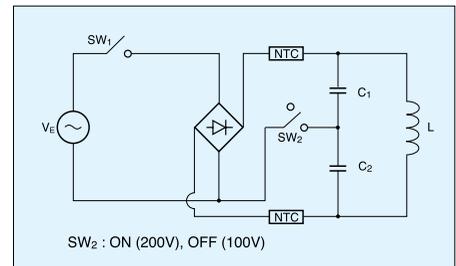

**Thermal time constant**

If ambient temperature of a thermistor is changed from T<sub>1</sub> to T<sub>2</sub> suddenly, temperature of the thermistor changes slowly. The time constant means the time when temperature of the thermistor reaches 63% of the temperature difference.

**Residual resistance**

If current is flowed through a thermistor, any heat will be generated in the thermistor by which its resistance will be decreased, however, a decrease of a resistance will be stabilized at a saturation resistance value which is determined by impressed electric power and a dissipation constant. The residual resistance value means maximum saturation resistance value when the maximum permissible current is flowed through the thermistor.

**Temperature coefficient α**

The temperature coefficient of a thermistor is expressed by the following equation ;

$$\alpha = -\frac{B}{T^2} \times 100 (\% / ^\circ\text{C})$$

**Dissipation factor**



If small voltage is applied to a thermistor, small current will flow which produce enough heat in the thermistor. Dissipation factor is electric power which make 1°C raise by heat in a thermistor.

$$\delta = \frac{P}{\Delta t} (\text{mW}/^\circ\text{C})$$

P is applied electric power.  
Δt is rised temperature of the thermistor.

**Maximum permissible current**

If the maximum permissible current flows to a thermistor at 25°C, temperature of the thermistor rises to 200°C, (160°C). When ambient temperature is above 25°C, the maximum permissible current shall be over reduced as the maximum permissible current reduction curve.

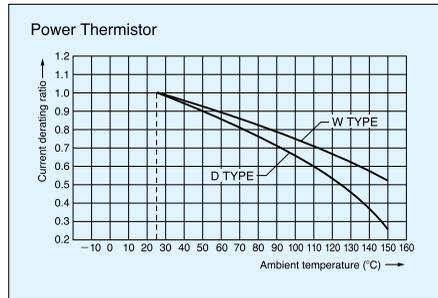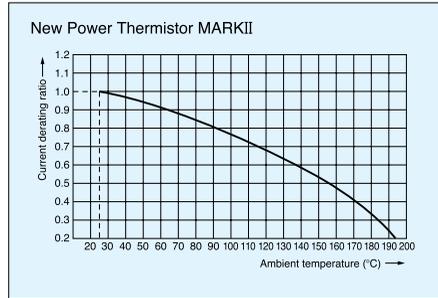

**Reliability tests**

**MARKII - type**

**Dry heat test**

Test sample is exposed in air at 200°C for 1,000 hours. ΔR25/R25 ≤ ±20%

**Damp heat test**

Test sample is exposed in atmosphere of 95%RH at 40°C for 1,000 hours. ΔR25/R25 ≤ ±10%

**Load test**

Test sample is applied the maximum rating current in air at 25°C for 1,000 hours. ΔR25/R25 ≤ ±20%

**Change of temperature**

Test sample is given 10 times of the following temperature cycle,  
→ -40°C for 30 minutes → room temperature for 5 minutes →  
→ 200°C for 30 minutes → room temperature for 5 minutes.  
ΔR25/R25 ≤ ±10%

**D-type**

**Dry heat test**

Test sample is exposed in air at 160°C for 1,000 hours. ΔR25/R25 ≤ ±10%

**Damp heat test**

Test sample is exposed in atmosphere of 95%RH at 40°C for 1,000 hours. ΔR25/R25 ≤ ±10%

**Load test**

Test sample is applied the maximum rating current in air at 25°C for 1,000 hours. ΔR25/R25 ≤ ±10%

**Change of temperature**

Test sample is given 10 times of the following temperature cycle,  
→ -10°C for 30 minutes → room temperature for 5 minutes →  
→ 160°C for 30 minutes → room temperature for 5 minutes.  
ΔR25/R25 ≤ ±10%

**D2-type**

**Dry heat test**

Test sample is exposed in air at 160°C for 1,000 hours. ΔR25/R25 ≤ ±15%

**Damp heat test**

Test sample is exposed in atmosphere of 95%RH at 40°C for 1,000 hours. ΔR25/R25 ≤ ±15%

**Load test**

Test sample is applied the maximum rating current in air at 25°C for 1,000 hours. ΔR25/R25 ≤ ±15%

**Change of temperature**

Test sample is given 10 times of the following temperature cycle,  
→ -40°C for 30 minutes → room temperature for 5 minutes →  
→ 100°C for 30 minutes → room temperature for 5 minutes.  
ΔR25/R25 ≤ ±15%


**Resistance-temperature characteristics**

The theoretical characteristics of a thermistor is expressed by following equation.

$$R_1 = R_2 \exp\left\{B\left(\frac{1}{T_1} - \frac{1}{T_2}\right)\right\}$$

R<sub>1</sub> is the zero-power resistance at absolute temperature T<sub>1</sub>  
R<sub>2</sub> is the zero-power resistance at absolute temperature T<sub>2</sub>

B is constant which depends on the material used to make the thermistor. Unless otherwise specified, all values of B are determined from measurements made at 25°C and 85°C.

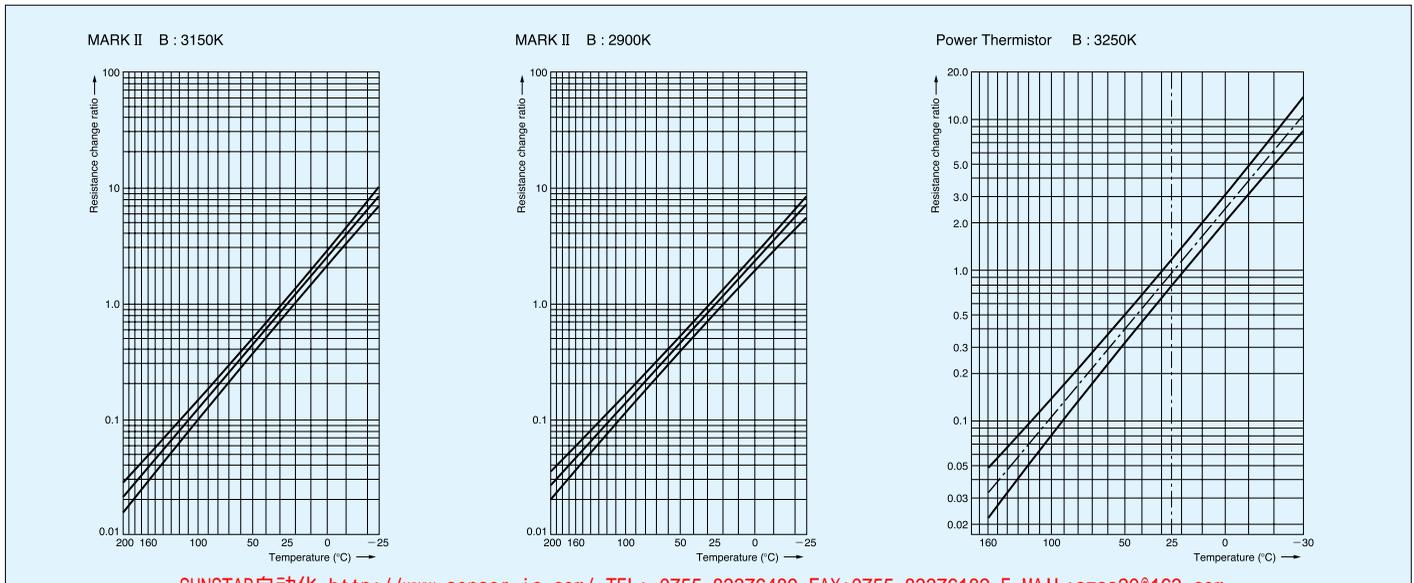




**Specifications (D-type)**


Part No.	R <sub>25</sub> *1 (Ω)	B value*2 B <sub>25/85</sub> (K)	Maximum energy J (W·s)	Maximum rating current at 25°C (A)	Residual resistance (Ω)	Dissipation factor (mW/°C) Approx.	Thermal time constant (s) Approx.	Category temp. range (°C)	Maximum capacitance (μF)			
									AC100V	AC120V	AC220V	AC240V
3D-22	3±15%	3250±5%	40.0	5.4	0.137	29.8	130	-30~160	8,500	5,900	1,700	1,470
4D-22	4±15%	3250±5%	50.0	4.7	0.182	30.7	160	-30~160	11,000	7,600	2,200	1,900
6D-22	6±15%	3250±5%	80.0	3.9	0.274	32.4	220	-30~160	17,000	11,800	3,500	2,950
4D-18	4±15%	3250±5%	9.0	4.1	0.182	22.8	100	-30~160	2,000	1,350	410	340
5D-18	5±15%	3250±5%	11.0	3.8	0.228	24.6	120	-30~160	2,500	1,700	510	430
8D-18	8±15%	3250±5%	18.0	3.1	0.365	27.2	150	-30~160	4,100	2,800	840	710
10D-18	10±15%	3250±5%	22.0	2.8	0.456	28.2	150	-30~160	5,000	3,400	1,030	860
5D-13	5±15%	3250±5%	4.0	3.4	0.228	20.1	55	-30~160	900	620	180	150
8D-13	8±15%	3250±5%	6.0	2.7	0.365	20.3	65	-30~160	1,400	970	280	240
16D-13	16±15%	3250±5%	12.0	1.9	0.730	21.4	105	-30~160	2,800	1,900	570	480
5D-11	5±15%	3250±5%	4.0	3.3	0.228	19.0	50	-30~160	900	620	180	150
8D-11	8±15%	3250±5%	6.0	2.6	0.365	19.8	70	-30~160	1,400	970	280	240
10D-11	10±15%	3250±5%	7.0	2.4	0.456	20.1	75	-30~160	1,800	1,250	370	310
10D-9	10±15%	3250±5%	2.0	2.2	0.456	17.2	40	-30~160	510	350	100	80
16D-9	16±15%	3250±5%	4.0	1.7	0.730	17.4	50	-30~160	820	560	160	140
22D-7	22±15%	3250±5%	1.0	1.4	1.003	15.7	30	-30~160	310	210	60	50

**Part number**

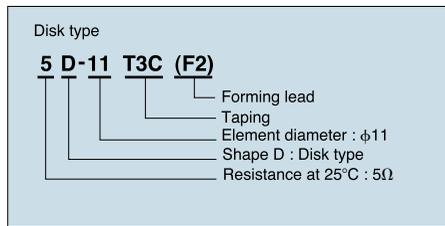


- UL approved (Disk type)  
File No. E92669  
Thermistor type device
- Canadian Standards (Disk type)  
File No. CA97673

**Dimensions**

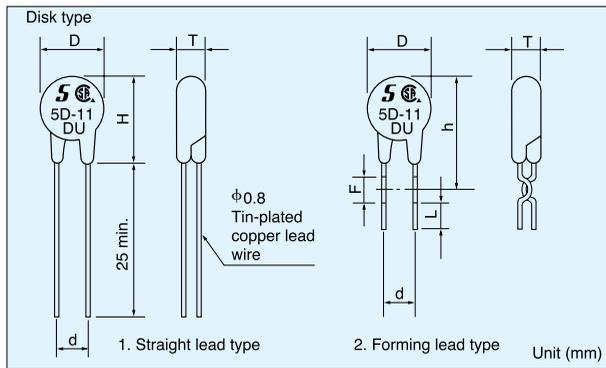

**Taping**

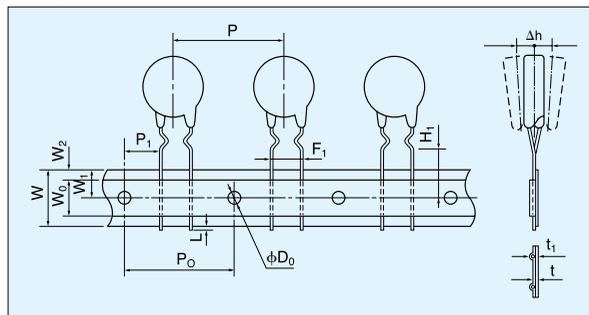

	D	T	H	h	F	L	d
D-7	9.5max.	5max.	13max.	15max.	3±0.5	3.5±0.5	6±1
D-9	11max.	6max.	15max.	17max.			7.5±1
D-11	14max.		18max.	20max.			
D-13	16max.	8max.	20max.	22max.			
D-18	21max.	9max.	26max.	28max.			
D-22	25max.	8max.	30max.	32max.	10±1		

Unit (mm)

**Taping**

	P	P <sub>0</sub>	P <sub>1</sub>	W	W <sub>0</sub>	W <sub>1</sub>	W <sub>2</sub>	H <sub>1</sub>	L	F <sub>1</sub>	φD <sub>0</sub>	t	t <sub>1</sub>	Δh
D-7	15±1	15±0.3	3.75±0.7	18 <sup>+1.0</sup> <sub>-0.5</sub>	5min.	9±0.5	3max.	16±0.5	1max.	7.5±0.5	4±0.3	0.6±0.3	1.6max.	0±2
D-9														
D-11														
D-13	30±1													

Unit (mm)




**Specifications (MARKII-type)**

Part No.	R <sub>25</sub> <sup>*1</sup> (Ω)	B value <sup>*2</sup> B <sub>25/85</sub> (K)	Maximum energy J (W·s)	Maximum rating current at 25°C (A)	Residual resistance (Ω)	Dissipation factor (mW/°C) Approx.	Thermal time constant(s) Approx.	Category temp. range (°C)	Maximum capacitance (μF)			
									AC100V	AC120V	AC220V	AC240V
M5R107	5.1±10%	2900±5%	2.0	4.6	0.18	17.0	20	-40~200	400	270	80	60
M8R207	8.2±10%	2900±5%	2.8	3.6	0.30	17.2	25	-40~200	560	380	110	90
M10007	10.0±10%	2900±5%	3.4	3.3	0.36	17.2	30	-40~200	680	470	140	110
M12007	12.0±10%	3150±5%	3.6	3.6	0.24	17.5	25	-40~200	560	380	110	90
M16007	16.0±10%	3150±5%	4.0	3.1	0.43	17.8	30	-40~200	800	550	160	130
M22007	22.0±10%	3150±5%	4.8	2.6	0.59	18.0	40	-40~200	960	660	190	160
M2R210	2.2±10%	2900±5%	8.2	7.4	0.08	18.9	40	-40~200	1,640	1,130	330	280
M3R010	3.0±10%	2900±5%	8.6	6.4	0.11	19.2	45	-40~200	1,720	1,190	350	290
M3R910	3.9±10%	2900±5%	8.0	5.6	0.11	19.5	45	-40~200	1,880	1,300	380	320
M5R110	5.1±10%	3150±5%	7.2	5.7	0.14	19.2	40	-40~200	1,440	1,000	290	250
M8R210	8.2±10%	3150±5%	7.8	4.5	0.22	19.9	50	-40~200	1,560	1,080	320	270
M10010	10.0±10%	3150±5%	8.2	4.1	0.27	20.1	60	-40~200	1,640	1,130	330	280
M1R014	1.0±10%	2900±5%	18.0	11.9	0.04	22.0	65	-40~200	3,720	2,580	760	640
M2R014	2.0±10%	2900±5%	21.0	8.6	0.07	23.4	90	-40~200	4,200	2,900	860	720
M3R014	3.0±10%	3150±5%	15.0	8.3	0.08	23.6	80	-40~200	3,080	2,130	630	530
M3R914	3.9±10%	3150±5%	17.0	7.4	0.08	24.5	95	-40~200	3,400	2,360	700	590
M5R114	5.1±10%	3150±5%	18.0	6.5	0.14	24.7	110	-40~200	3,600	2,500	740	620


\*1 R<sub>25</sub> : Rated zero-power resistance value at 25°C.  
 \*2 B value : determined by rated zero-power resistance at 25°C and 85°C.  
 \*3 Residual resistance is the maximum value when maximum rating current is applied.  
 \*4 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.

**Part number**

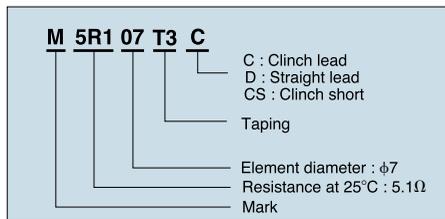


●UL approved File No. E92669 Thermistor type devices

**Dimensions**

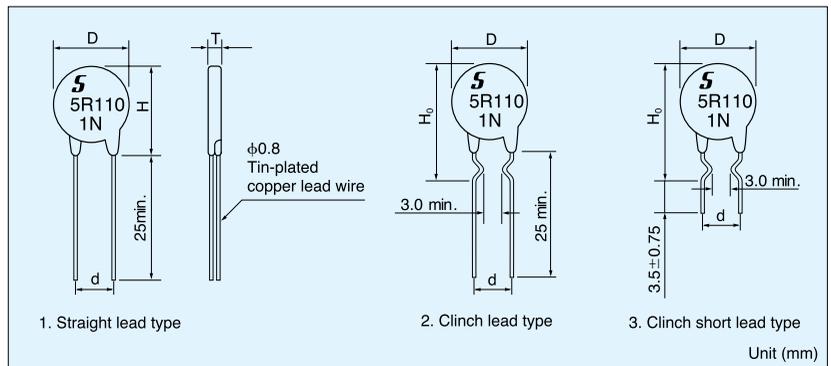

**Taping**

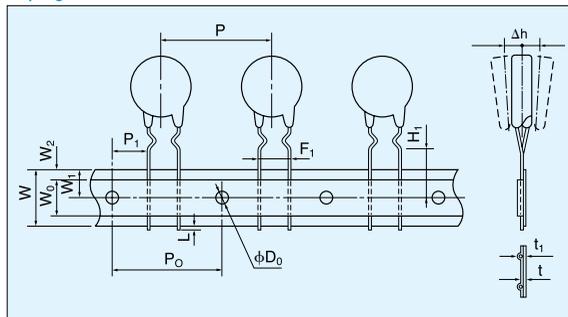

	D	T	H	H <sub>0</sub>	d
M...07	9.5max.	6max.	12max.	15max.	7.5±1
M...10	13max.		17max.	19.5max.	
M...14	17max.		20.5max.	22.5max.	

Unit (mm)

**Taping**

	P	P <sub>0</sub>	P <sub>1</sub>	W	W <sub>0</sub>	W <sub>1</sub>	W <sub>2</sub>	H <sub>1</sub>	L	F <sub>1</sub>	φD <sub>0</sub>	t	t <sub>1</sub>	Δh
M...07	15±1	15±0.3	3.75±0.7	18 <sup>+1.0</sup> <sub>-0.5</sub>	5min.	9±0.5	3max.	16±0.5	1max.	7.5±0.5	4±0.2	0.6±0.3	1.5max.	0±2
M...10	30±1													
M...14	30±1													

Unit (mm)




Specifications (D2-type)

Part No.	R <sub>25</sub> <sup>*1</sup> (Ω)	Maximum rating current at 25°C (A)	Residual resistance <sup>*2</sup> (Ω)	Dissipation factor (mW/°C) Approx.	Thermal <sup>*3</sup> time constant(s) Approx.	Category temp. range (°C)	Maximum capacitance at AC220V (μF)
5D2-07	5	3.0	0.36	30	35	-40~160	80
8D2-07	8	2.0	0.57	30	41	-40~160	110
10D2-07	10	2.0	0.71	30	45	-40~160	140
12D2-07	12	1.7	0.77	30	41	-40~160	80
16D2-07	16	2.0	1.03	30	45	-40~160	160
22D2-07	22	1.0	1.42	30	50	-40~160	190
2D2-10	2	5.0	0.14	32	50	-40~160	330
3D2-10	3	4.0	0.21	32	53	-40~160	350
5D2-10	5	4.0	0.32	32	53	-40~160	290
8D2-10	8	3.0	0.52	32	70	-40~160	320
10D2-10	10	3.0	0.65	32	75	-40~160	330
12D2-10	12	1.8	0.70	32	53	-40~160	173
16D2-10	16	1.6	0.94	32	70	-40~160	173
2D2-14	2	5.0	0.14	36	90	-40~160	860
3D2-14	3	5.0	0.19	36	80	-40~160	630
4D2-14	4	5.0	0.26	36	95	-40~160	700
5D2-14	5	4.0	0.32	36	110	-40~160	740
8D2-14	8	2.5	0.47	36	80	-40~160	289
10D2-14	10	2.2	0.58	36	95	-40~160	371
12D2-14	12	2.0	0.70	36	105	-40~160	454
16D2-14	16	1.8	0.94	36	115	-40~160	578


\*1 R<sub>25</sub> : Rated zero-power resistance value at 25°C.  
 \*2 Residual resistance is the maximum value when maximum rating current is applied.  
 \*3 Time when thermistor temperature reaches 63.2% of the temperature difference. The value is measured in the air.

Part number

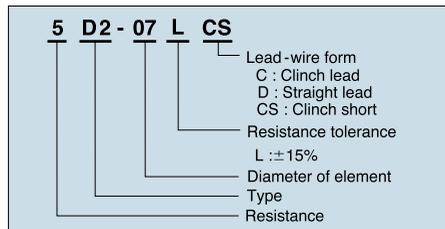

●UL approved File No. E92669 Thermistor type devices

Dimensions

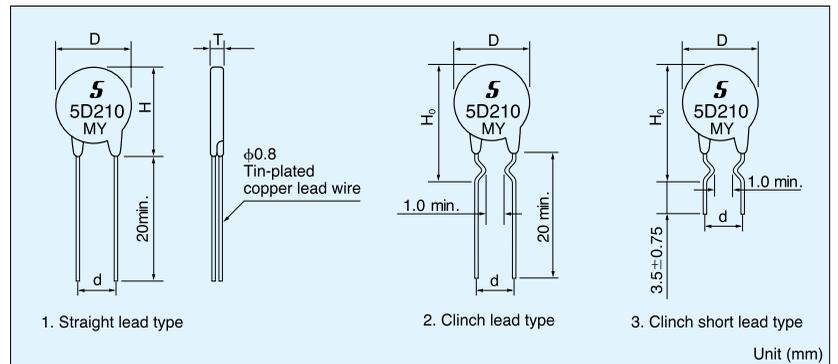


	D	T	H	H <sub>0</sub>	d
D2-07	11max.	9max.	13max.	16max.	5.0±1
D2-10	13max.		17max.	19.5max.	
D2-14	17max.		21max.	22.5max.	

Unit (mm)

## TRANSIENT VOLTAGE SUPPRESSOR

# VRD

VRD is a transient voltage suppressor used for protecting electric circuits from surge voltage and thus preventing breakdown. VRD has superior surge suppression characteristics, such as extremely fast response time, very low clamping voltage, and high surge capacity. Unlike metal oxide varistors, VRD does not have characteristics to change with surge variations within the rated capacity. This feature comprises another superior characteristics of the VRD as a transient voltage suppressors.

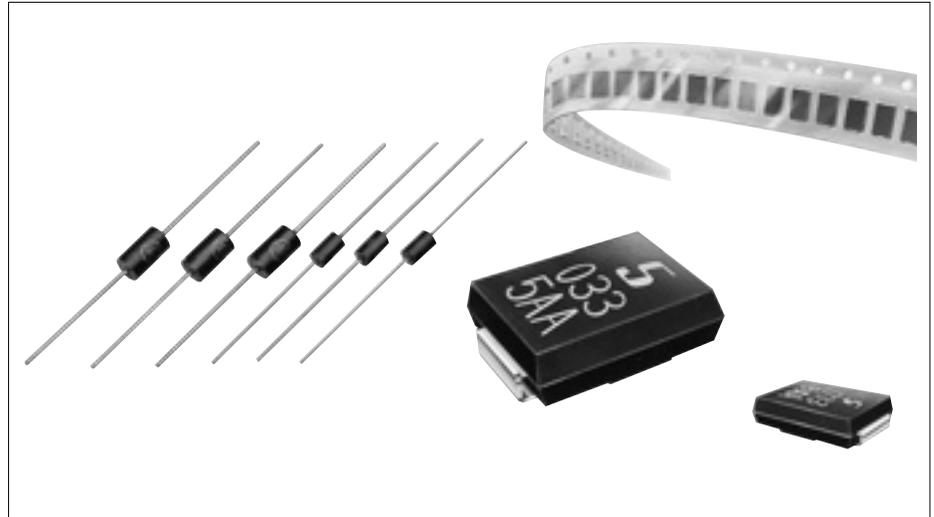

### Electrical characteristics

Figure 1 shows the electrical characteristics. Bipolar type has almost symmetrical breakdown voltage ( $V_B$ ) The reverse breakdown voltage of the ZD type is 200 Volts or more at 10 $\mu$ A DC.

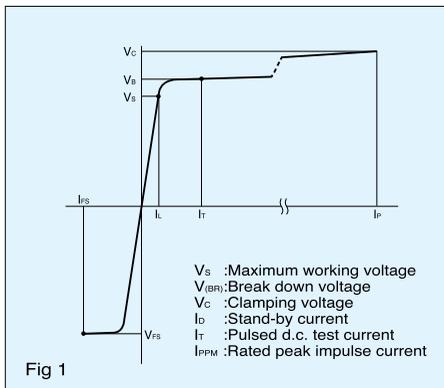


Fig 1

### Taping

One of standard taping is as shown in Figure.

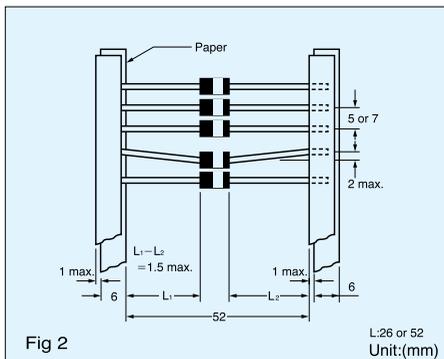


Fig 2

### Surge capability

Allowable surge capability ( $P_{PPM}$ ) is determined by the following equation:

$$P_{PPM} = I_{PPM} \times V_c$$

$I_{PPM}$ : Rated peak impulse current  
 $V_c$ : clamping voltage

The allowable surge capability (Rated peak impulse power dissipation  $P_{PPM}$ ) of VRD is shown in following Figure 3 and the surge capability derating characteristics are shown in Figure 6.

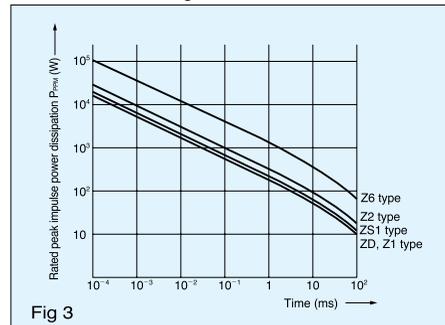


Fig 3

### Surge waveform

There are many types of surge waveform depending on the source of the surge. For the VRD surge suppression characteristics test, the EXP waveform shown below is used. The EXP waveform is shown as  $t_a/t_b$  depending on the time width, however 10/1000 waveform is used as the standard test waveform.

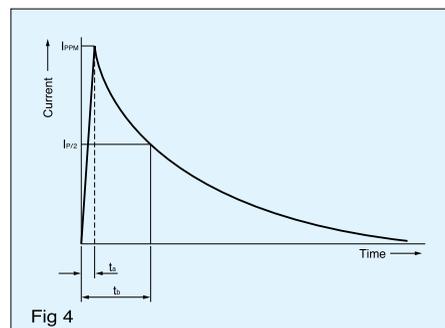


Fig 4

### Surge suppression characteristics

When EXP waveform is applied, the surge suppression waveform shown in the figure 5 can be observed.

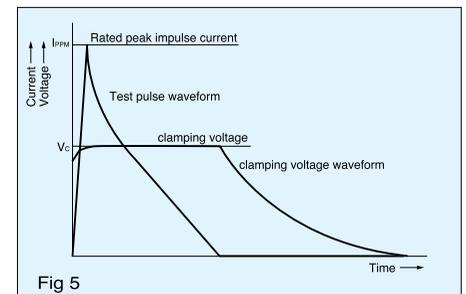


Fig 5

### Power derating


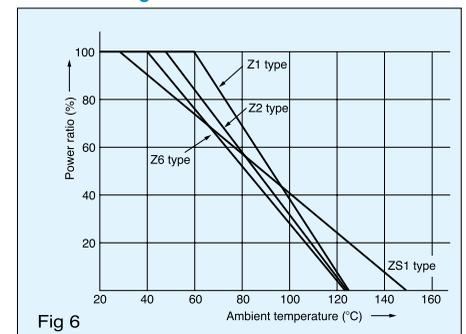


Fig 6

**Z1 type VRD has bipolar electrical characteristics.**

Maximum ratings  
 Rated peak impulse power dissipation :250 W(10/1000 $\mu$ s)  
 3.00 kW(8/20 $\mu$ s)  
 Rated average power dissipation:500 mW  
 Operating and storage temperature : -40°C to 125°C

Symbol mark

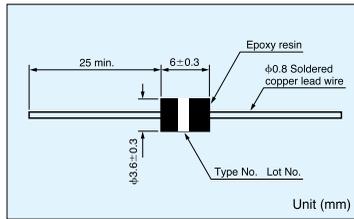


Part No.		Stand-off voltage V <sub>s</sub> V	Stand-by current I <sub>D</sub> $\mu$ A	Breakdown voltage V <sub>(BR)</sub> V	Pulsed d.c. test current I <sub>T</sub> mA	Clamping Voltage & Rated peak impulse current				Temperature coefficient (TYP)	Capacitance (TYP) pF
Bi-polar type						10/1000 $\mu$ s		8/20 $\mu$ s			
						V <sub>C</sub> V	I <sub>PPM</sub> A	V <sub>C</sub> V	I <sub>PPM</sub> A		
Z1015		12.1	5	13.5-16.5	1	22.0	11.3	28.4	106.0	0.075	450
Z1018		14.5	5	16.2-19.8	1	26.5	9.43	34.0	89.1	0.079	360
Z1022		17.8	5	19.8-24.2	1	31.9	7.83	41.2	73.5	0.082	290
Z1027		21.8	5	24.3-29.7	1	39.1	6.39	50.5	60.0	0.085	240
Z1033		26.8	5	29.7-36.3	1	47.7	5.24	61.7	49.1	0.087	200
Z1039		31.6	5	35.1-42.9	1	56.4	4.43	73.0	41.5	0.090	170
Z1047		38.1	5	42.3-51.7	1	67.8	3.69	88.0	34.4	0.092	140
Z1056		45.4	5	50.4-61.6	1	80.5	3.10	105.0	28.8	0.094	110
Z1068		55.1	5	61.2-74.8	1	98.0	2.55	127.0	23.8	0.096	90
Z1082		66.4	5	73.8-90.2	1	118.0	2.14	153.0	19.8	0.099	80
Z1100		81.0	5	90.0-110	1	144.0	1.73	187.0	16.2	0.101	65
Z1120		97.0	5	108-132	1	173.0	1.44	222.0	13.6	0.103	53
Z1150		121.0	5	135-165	1	215.0	1.16	277.0	10.9	0.105	42

**Z2 type VRD has bipolar or unipolar electrical characteristics.**

Maximum ratings  
 Rated peak impulse power dissipation :500 W (10/1000 $\mu$ s)  
 6.00 kW (8/20 $\mu$ s)  
 Rated average power dissipation:1W  
 Operating and storage temperature : -40°C to 125°C

Symbol mark

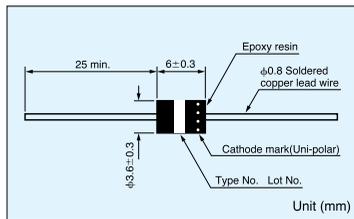

Part No.		Stand-off voltage V <sub>s</sub> V	Stand-by current I <sub>D</sub> $\mu$ A	Breakdown voltage V <sub>(BR)</sub> V	Pulsed d.c. test current I <sub>T</sub> mA	Clamping Voltage & Rated peak impulse current				Temperature coefficient (TYP)	Capacitance (TYP) pF
Bi-polar type	Uni-polar type					10/1000 $\mu$ s		8/20 $\mu$ s			
						V <sub>C</sub> V	I <sub>PPM</sub> A	V <sub>C</sub> V	I <sub>PPM</sub> A		
Z2008	-	6.63	500	7.38-9.02	10	12.5	40.0	16.3	372	0.045	1200
-	Z2008U	6.63	500	7.38-9.02	10	12.5	40.0	16.3	372	0.063	2400
Z2010	-	8.10	100	9.00-11.0	1	15.0	33.4	19.5	311	0.055	950
-	Z2010U	8.10	20	9.00-11.0	1	15.0	33.4	19.5	311	0.071	1900
Z2012	-	9.72	5	10.8-13.2	1	17.3	28.9	22.7	267	0.066	790
-	Z2012U	9.72	5	10.8-13.2	1	17.3	28.9	22.7	267	0.074	1580
Z2015	-	12.1	5	13.5-16.5	1	22.0	22.7	28.4	213	0.075	640
-	Z2015U	12.1	5	13.5-16.5	1	22.0	22.7	28.4	213	0.079	1280
Z2018	-	14.5	5	16.2-19.8	1	26.5	18.8	34.0	178	0.079	520
-	Z2018U	14.5	5	16.2-19.8	1	26.5	18.8	34.0	178	0.083	1040
Z2022	-	17.8	5	19.8-24.2	1	31.9	15.7	41.2	147	0.082	420
-	Z2022U	17.8	5	19.8-24.2	1	31.9	15.7	41.2	147	0.086	840
Z2027	-	21.8	5	24.3-29.7	1	39.1	12.8	50.5	120	0.085	340
-	Z2027U	21.8	5	24.3-29.7	1	39.1	12.8	50.5	120	0.089	680
Z2033	-	26.8	5	29.7-36.3	1	47.7	10.5	61.7	98.2	0.087	280
-	Z2033U	26.8	5	29.7-36.3	1	47.7	10.5	61.7	98.2	0.092	560
Z2039	-	31.6	5	35.1-42.9	1	56.4	8.86	73.0	83.0	0.090	240
-	Z2039U	31.6	5	35.1-42.9	1	56.4	8.86	73.0	83.0	0.095	480
Z2047	-	38.1	5	42.3-51.7	1	67.8	7.37	88.0	68.9	0.092	200
-	Z2047U	38.1	5	42.3-51.7	1	67.8	7.37	88.0	68.9	0.097	400
Z2056	-	45.4	5	50.4-61.6	1	80.5	6.21	105.0	57.7	0.094	160
-	Z2056U	45.4	5	50.4-61.6	1	80.5	6.21	105.0	57.7	0.099	320
Z2068	-	55.1	5	61.2-74.8	1	98.0	5.10	127.0	47.7	0.096	130
-	Z2068U	55.1	5	61.2-74.8	1	98.0	5.10	127.0	47.7	0.100	260
Z2082	-	66.4	5	73.8-90.2	1	118.0	4.24	153.0	39.6	0.099	110
-	Z2082U	66.4	5	73.8-90.2	1	118.0	4.24	153.0	39.6	0.102	220
Z2100	-	81.0	5	90.0-110	1	144.0	3.47	187.0	32.4	0.101	90
-	Z2100U	81.0	5	90.0-110	1	144.0	3.47	187.0	32.4	0.104	180
Z2120	-	97.2	5	108-132	1	173.0	2.89	222.0	27.3	0.103	75
-	Z2120U	97.2	5	108-132	1	173.0	2.89	222.0	27.3	0.106	150
Z2150	-	121.0	5	135-165	1	215.0	2.32	277.0	21.9	0.105	60
-	Z2150U	121.0	5	135-165	1	215.0	2.32	277.0	21.9	0.107	120
Z2180	-	146.0	5	162-198	1	258.0	1.94	333.0	18.2	0.106	49
-	Z2180U	146.0	5	162-198	1	258.0	1.94	333.0	18.2	0.108	98

NOTE: Nonsuffix:bi-polar, suffix"U" : uni-polar.


Part No.		Stand-off voltage V <sub>s</sub> V	Stand-by current I <sub>D</sub> μA	Breakdown voltage V <sub>(BR)</sub> V	Pulsed d.c. test current I <sub>T</sub> mA	Clamping Voltage & Rated peak impulse current				Max. temp. coef. %/°C	Capacitance (TYP) pF
Bi-polar type	Uni-polar type					10/1000μs		8/20μs			
						V <sub>C</sub> V	I <sub>PPM</sub> A	V <sub>C</sub> V	I <sub>PPM</sub> A		
-	Z6008U	6.63	500	7.38-9.02	10	12.5	120	16.3	1120	0.063	14600
Z6010	-	8.10	200	9.00-11.0	1	15.0	100	19.5	933	0.055	5600
-	Z6010U	8.10	50	9.00-11.0	1	15.0	100	19.5	933	0.071	11200
Z6012	-	9.72	10	10.8-13.2	1	17.3	86.7	22.7	802	0.066	4400
-	Z6012U	9.72	5	10.8-13.2	1	17.3	86.7	22.7	802	0.074	8800
Z6015	-	12.1	5	13.5-16.5	1	22.0	68.2	28.4	641	0.075	3300
-	Z6015U	12.1	5	13.5-16.5	1	22.0	68.2	28.4	641	0.079	6600
Z6018	-	14.5	5	16.2-19.8	1	26.5	56.6	34.0	535	0.079	2700
-	Z6018U	14.5	5	16.2-19.8	1	26.5	56.6	34.0	535	0.083	5400
Z6022	-	17.8	5	19.8-24.2	1	31.9	47.0	41.2	442	0.082	2400
-	Z6022U	17.8	5	19.8-24.2	1	31.9	47.0	41.2	442	0.086	4400
Z6027	-	21.8	5	24.3-29.7	1	39.1	38.5	50.5	360	0.085	1700
-	Z6027U	21.8	5	24.3-29.7	1	39.1	38.4	50.5	360	0.089	3300
Z6033	-	26.8	5	29.7-36.3	1	47.7	31.4	61.7	295	0.087	1400
-	Z6033U	26.8	5	29.7-36.3	1	47.7	31.4	61.7	295	0.092	2800
Z6039	-	31.6	5	35.1-42.9	1	56.4	26.6	73.0	249	0.090	1200
-	Z6039U	31.6	5	35.1-42.9	1	56.4	26.6	73.0	249	0.095	2400
Z6047	-	38.1	5	42.3-51.7	1	67.8	22.1	88.0	207	0.092	1000
-	Z6047U	38.1	5	42.3-51.7	1	67.8	22.1	88.0	207	0.097	2000
Z6056	-	45.4	5	50.4-61.6	1	80.5	18.6	105.0	173	0.094	850
-	Z6056U	45.4	5	50.4-61.6	1	80.5	18.6	105.0	173	0.099	1700
Z6068	-	55.1	5	61.2-74.8	1	98.0	15.3	127.0	143	0.096	720
-	Z6068U	55.1	5	61.2-74.8	1	98.0	15.3	127.0	143	0.100	1440
Z6082	-	66.4	5	73.8-90.2	1	118.0	12.7	153.0	119	0.099	610
-	Z6082U	66.4	5	73.8-90.2	1	118.0	12.7	153.0	119	0.102	1220
Z6100	-	81.0	5	90.0-110	1	144.0	10.4	187.0	97.3	0.101	520
-	Z6100U	81.0	5	90.0-110	1	144.0	10.4	187.0	97.3	0.104	1040
Z6120	-	97.2	5	108-132	1	173.0	8.67	222.0	82.0	0.103	440
-	Z6120U	97.2	5	108-132	1	173.0	8.67	222.0	82.0	0.106	880
-	Z6150U	121.0	5	135-165	1	215.0	6.98	277.0	65.7	0.107	720

NOTE : Nonsuffix : Bi-polar, suffix "U" : Uni-polar.

**Z6 type VRD has bipolar or unipolar electrical characteristics.**

Maximum ratings  
 Rated peak impulse power dissipation : 1.5kW(10/1000μs)  
 18.0kW(8/20μs)  
 Rated average power dissipation: 2W  
 Operating and storage temperature : -40°C to 125°C

Symbol mark

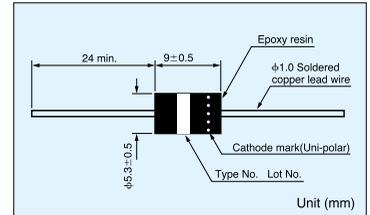


VRD part No.	Stand-off voltage V <sub>s</sub> V	Stand-by current I <sub>D</sub> μA	Breakdown voltage V <sub>(BR)</sub> V	Pulsed d.c. test current I <sub>T</sub> mA	Clamping Voltage & Rated peak impulse current				Max. temp. coef. %/°C	Capacitance (TYP) pF
					10/1000μs		8/20μs			
					V <sub>C</sub> V	I <sub>PPM</sub> A	V <sub>C</sub> V	I <sub>PPM</sub> A		
ZD015	11.4	10	12.8-17.2	1	24.0	10.4	31.0	96.7	0.075	31.5
ZD018	13.7	10	15.3-20.7	1	28.0	8.93	36.0	83.3	0.079	31.0
ZD022	16.8	5	18.7-25.3	1	33.2	7.53	43.0	69.7	0.082	29.0
ZD027	20.6	5	23.0-31.0	1	40.0	6.25	52.0	57.7	0.085	28.2
ZD033	25.2	5	28.1-37.9	1	48.6	5.14	63.0	47.6	0.087	27.2
ZD039	29.8	5	33.2-44.8	1	57.4	4.35	74.0	40.5	0.090	26.3
ZD047	35.9	5	40.0-54.0	1	68.5	3.65	89.0	33.7	0.092	25.0
ZD056	42.8	5	47.6-64.4	1	81.0	3.08	106.0	28.6	0.094	24.1
ZD068	52.0	5	57.8-78.2	1	98.0	2.55	127.0	23.8	0.096	22.0

**Low capacitance type**


Maximum ratings  
 Reverse voltage: 200 VDC  
 Rated peak impulse power dissipation : 250 W(10/1000μs)  
 3.00 kW(8/20μs)  
 Rated average power dissipation: 500 mW  
 Operating and storage temperature : -40°C to 125°C

Symbol mark

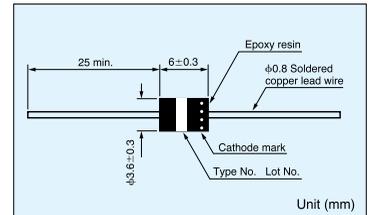


# SMD VRD


## Part number

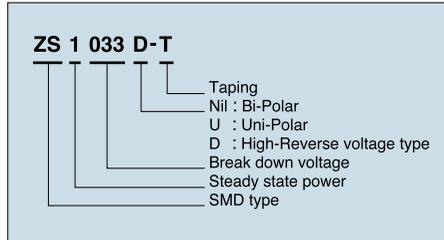

## Dimensions

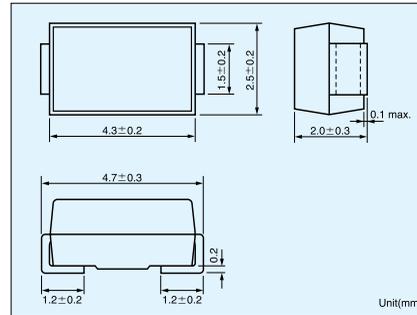


## Marking

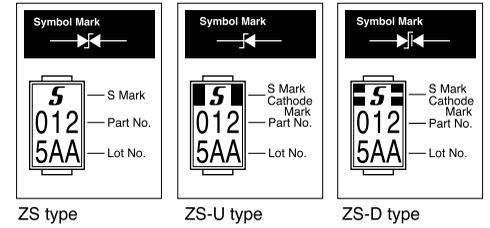

	Rating
Rated average power dissipation	1.0W
Rated peak impulse power dissipation	300W(10/1000 $\mu$ s)
	1200W(1.2/50 $\mu$ s)
	2000W(8/20 $\mu$ s)
Storage temp. range	-40°C~150°C

## Taping

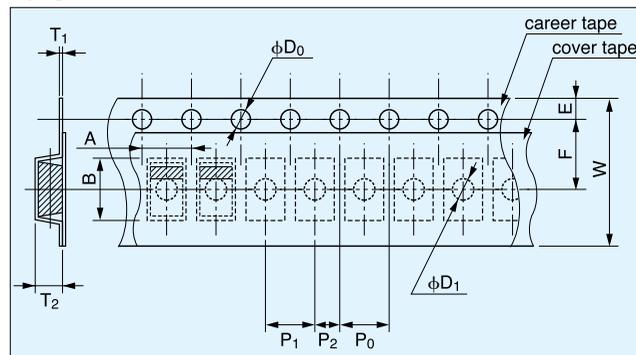

A	B	W	F	E	P <sub>1</sub>
3.0 ±0.1	5.2 ±0.1	12.0 ±0.3	5.5 ±0.05	1.75 ±0.1	4.0 ±0.1
P <sub>2</sub>	P <sub>0</sub>	phi D <sub>0</sub>	phi D <sub>1</sub>	T <sub>1</sub>	T <sub>2</sub>
2.0 ±0.1	4.0 ±0.1	1.5 +0.1 -0	1.5 +0.2 -0	0.3 ±0.05	(2.6)

Unit (mm)

## Specifications

### ZS type

Part No.	Breakdown voltage	Stand-off voltage	Stand-by current	Maximum clamping voltage & Maximum peak pulse current				Temperature coefficient (TYP)	Capacitance (TYP)						
				V <sub>(BR)</sub>	V <sub>s</sub>	I <sub>L max</sub>	V <sub>cmax</sub> /I <sub>PPM</sub>								
							It=1mA			D.C.	V <sub>s</sub>	10/1000 $\mu$ s		8/20 $\mu$ s	
												V	A	V	A
ZS1012	12(10.8~13.2)	9.72	10	17.3	17.3	22.4	89.3	0.066	551						
ZS1015	15(13.5~16.5)	12.1	5	22.0	13.6	28.5	70.2	0.075	465						
ZS1018	18(16.2~19.8)	14.5	5	26.5	11.3	34.4	58.1	0.079	376						
ZS1022	22(19.8~24.2)	17.8	5	31.9	9.40	41.4	48.3	0.082	299						
ZS1027	27(24.3~29.7)	21.8	5	39.1	7.67	50.7	39.4	0.085	248						
ZS1033	33(29.7~36.3)	26.8	5	47.7	6.29	61.8	32.4	0.087	198						
ZS1039	39(35.1~42.9)	31.6	5	56.4	5.32	73.1	27.4	0.090	164						
ZS1047	47(42.3~51.7)	38.1	5	67.8	4.42	88.0	22.7	0.092	137						

### ZS-U type

Part No.	Breakdown voltage	Stand-off voltage	Stand-by current	Maximum clamping voltage & Maximum peak pulse current				Temperature coefficient (TYP)	Capacitance (TYP)						
				V <sub>(BR)</sub>	V <sub>s</sub>	I <sub>L max</sub>	V <sub>cmax</sub> /I <sub>PPM</sub>								
							It=1mA			D.C.	V <sub>s</sub>	10/1000 $\mu$ s		8/20 $\mu$ s	
												V	A	V	A
ZS1012U	12(10.8~13.2)	9.72	10	17.3	17.3	22.4	89.3	0.066	1,102						
ZS1015U	15(13.5~16.5)	12.1	5	22.0	13.6	28.5	70.2	0.075	929						
ZS1018U	18(16.2~19.8)	14.5	5	26.5	11.3	34.4	58.1	0.079	751						
ZS1022U	22(19.8~24.2)	17.8	5	31.9	9.40	41.4	48.3	0.082	598						
ZS1027U	27(24.3~29.7)	21.8	5	39.1	7.67	50.7	39.4	0.085	497						
ZS1033U	33(29.7~36.3)	26.8	5	47.7	6.29	61.8	32.4	0.087	395						
ZS1039U	39(35.1~42.9)	31.6	5	56.4	5.32	73.1	27.4	0.090	328						
ZS1047U	47(42.3~51.7)	38.1	5	67.8	4.42	88.0	22.7	0.092	274						

### ZS-D type



Part No.	Breakdown voltage	Stand-off voltage	Stand-by current	Maximum clamping voltage & Maximum peak pulse current				Temperature coefficient (TYP)	Capacitance (TYP)						
				V <sub>(BR)</sub>	V <sub>s</sub>	I <sub>L max</sub>	V <sub>cmax</sub> /I <sub>PPM</sub>								
							It=1mA			D.C.	V <sub>s</sub>	10/1000 $\mu$ s		8/20 $\mu$ s	
												V	A	V	A
ZS1012D	12(10.8~13.2)	9.72	10	17.3	17.3	22.4	89.3	0.066	30.2						
ZS1015D	15(13.5~16.5)	12.1	5	22.0	13.6	28.5	70.2	0.075	29.1						
ZS1018D	18(16.2~19.8)	14.5	5	26.5	11.3	34.4	58.1	0.079	28.2						
ZS1022D	22(19.8~24.2)	17.8	5	31.9	9.40	41.4	48.3	0.082	27.3						
ZS1027D	27(24.3~29.7)	21.8	5	39.1	7.67	50.7	39.4	0.085	26.4						
ZS1033D	33(29.7~36.3)	26.8	5	47.7	6.29	61.8	32.4	0.087	25.5						
ZS1039D	39(35.1~42.9)	31.6	5	56.4	5.32	73.1	27.4	0.090	24.8						
ZS1047D	47(42.3~51.7)	38.1	5	67.8	4.42	88.0	22.7	0.092	24.0						

## CURRENT REGULATIVE DIODE


# CRD

CRD is a diode which supplies constant current to an electric circuit, even when power supply voltage fluctuations or load impedance fluctuations occur.

CRD is used for current stabilization and current limiting.

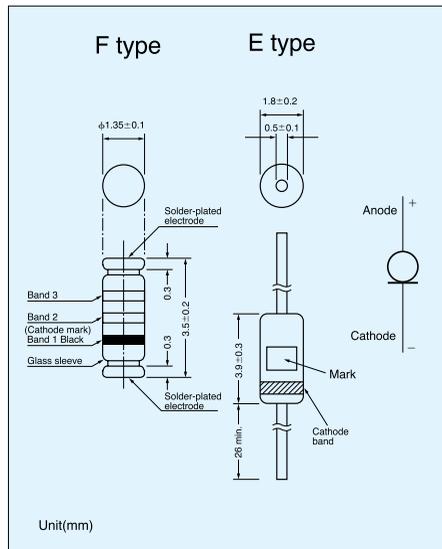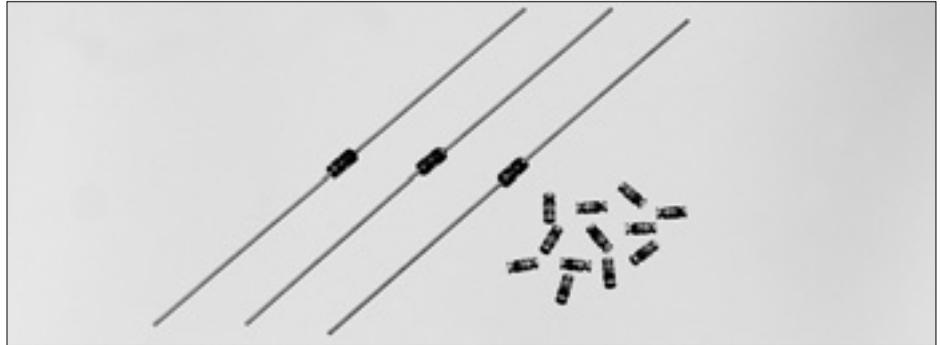

### Basic characteristics

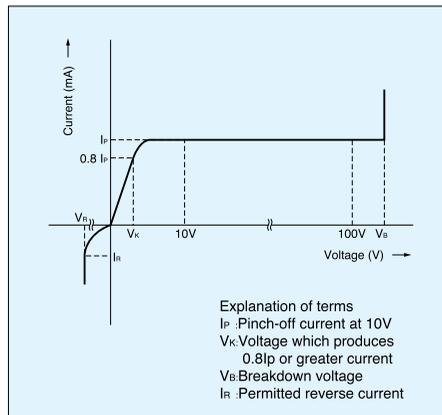

### Maximum ratings

	E type	F type
Rating power	300mW	400mW
Thermal resistance	300°C/W	150°C/W
Reverse current	50mA	
Operating temp	-30°C~150°C	

### Maximum rating voltage

Part No.	Voltage	Part No.	Voltage
E101L~E-562	100V	F101L~F-562	100V
E-822	30	F-822	50
E-103	30	F-103	42
E-123	30	F-123	34
E-153	25	F-153	28



### Specifications

Part No.	Pinch-off current*1	Limiting current*2	Dynamic*3 impedance	Limiting current ratio	Temperature*4 coefficient	Indication					
						F type	E	Type			
lead less	with lead	Test Voltage	$I_p$ (mA)	$V_k$ (V)	$I_k$ (mA)	$Z_T$ (MΩ)	$I_{100V}/I_p^*$	(%/°C)	Band 2	Band 3	
F-101L	E-101L	10V	0.01~0.06	0.4	0.8Ipmin.	8.00	1.1 max.	+2.10~+0.10	Light blue	White	1L
F-101	E-101	10V	0.05~0.21	0.5	0.8Ipmin.	6.00	1.1 max.	+2.10~+0.10	Light blue	Pink	01
F-301	E-301	10V	0.20~0.42	0.8	0.8Ipmin.	4.00	1.1 max.	+0.40~-0.20	Light blue	Orange	03
F-501	E-501	10V	0.40~0.63	1.1	0.8Ipmin.	2.00	1.1 max.	+0.15~-0.25	Light blue	Yellow green	05
F-701	E-701	10V	0.60~0.92	1.4	0.8Ipmin.	1.00	1.1 max.	0.00~-0.32	Light blue	Blue	07
F-102	E-102	10V	0.88~1.32	1.7	0.8Ipmin.	0.65	1.1 max.	-0.10~-0.37	Yellow green	Pink	10
F-152	E-152	10V	1.28~1.72	2.0	0.8Ipmin.	0.40	1.1 max.	-0.13~-0.40	Yellow green	Orange	15
F-202	E-202	10V	1.68~2.32	2.3	0.8Ipmin.	0.25	1.1 max.	-0.15~-0.42	Yellow green	Yellow green	20
F-272	E-272	10V	2.28~3.10	2.7	0.8Ipmin.	0.15	1.1 max.	-0.18~-0.45	Yellow green	Light blue	27
F-352	E-352	10V	3.00~4.10	3.2	0.8Ipmin.	0.10	1.1 max.	-0.20~-0.47	Yellow green	Blue	35
F-452	E-452	10V	3.90~5.10	3.7	0.8Ipmin.	0.07	1.1 max.	-0.22~-0.50	Yellow green	Purple	45
F-562	E-562	10V	5.00~6.50	4.5	0.8Ipmin.	0.04	1.1 max.	-0.25~-0.53	Yellow green	White	56
F-822	E-822	10V	6.56~9.84	3.1	0.8Ipmin.	0.32	*1.0max.	-0.25~-0.45	Yellow green	Yellow	82
F-103	E-103	10V	8.00~12.0	3.5	0.8Ipmin.	0.17	*1.0max.	-0.25~-0.45	Orange	Pink	10
F-123	E-123	10V	9.60~14.4	3.8	0.8Ipmin.	0.08	*1.0max.	-0.25~-0.45	Orange	White	12
F-153	E-153	10V	12.0~18.0	4.3	0.8Ipmin.	0.03	*1.0max.	-0.25~-0.45	Orange	Light blue	15


\*1,2 Pinch-off current limiting current are measured by impulse wave at 25°C  
 \*3  $Z_T$  is minimum AC impedance when small AC signal voltage of 10KHz is added to 25Vbc bias.  $Z_T$  is used as the reference value.  
 \*4 Temperature coefficient is measured between 25°C and 50°C.  
 \* $I_{100V}/I_p$

### Taping

There are three Types for taping.

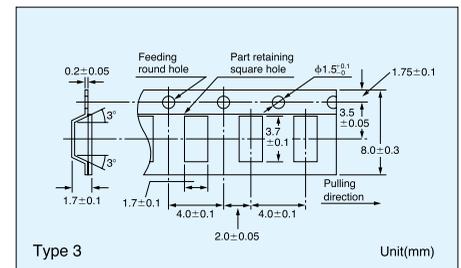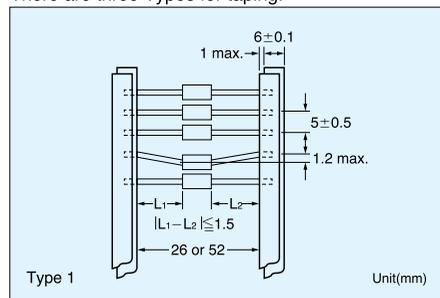


\*In principal elements are set with cathode side on the round hole side.

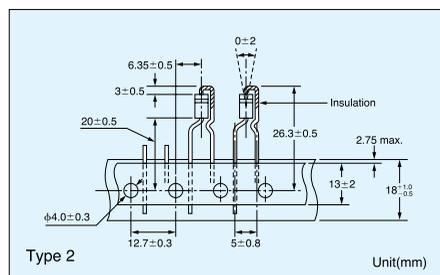


### Minimum taping quantity for

- Type 1 Roll.....5000pcs
- Box.....2500pcs
- Type 2 4000pcs
- Type 3 2500pcs

**Power derating**

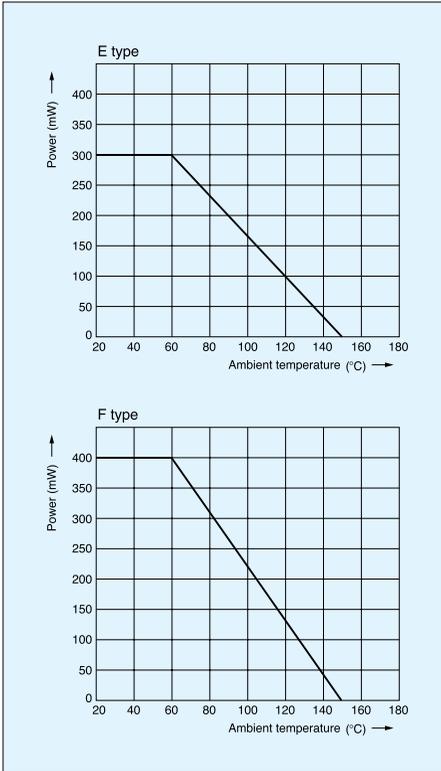

**Pinch-off current Temperature**

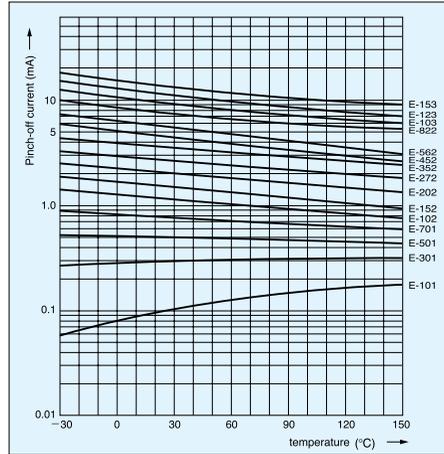


**CRD in parallel**

The use of CRD in parallel increases their current handling capabilities.

**Increasing the voltage range using a zener diode**


Connecting zener diodes in series with the line ensures that the current is constant in high-voltage area.

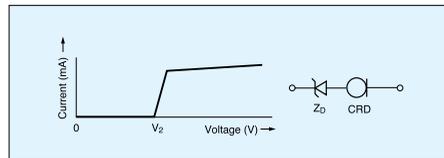


**The compensation of current reduction due to self heating**

Placing resistors in parallel with CRD can correct any current decrease when the applied voltage increases. The following values are typical for correction resistors.



E-102	1MΩ	E-352	82kΩ
E-152	390kΩ	E-452	56kΩ
E-202	240kΩ	E-562	39kΩ
E-272	120kΩ		

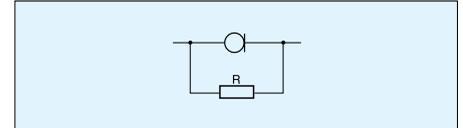

Compensative resistor is not necessary if the current value is less than 1 mA.

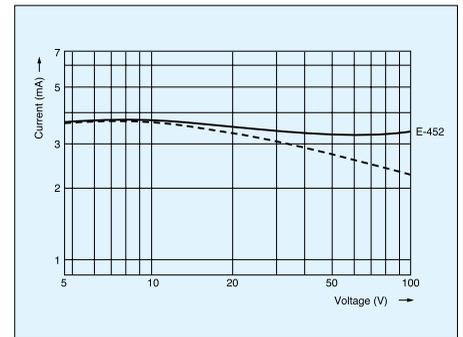


**Dynamic characteristics (saturation characteristics)**

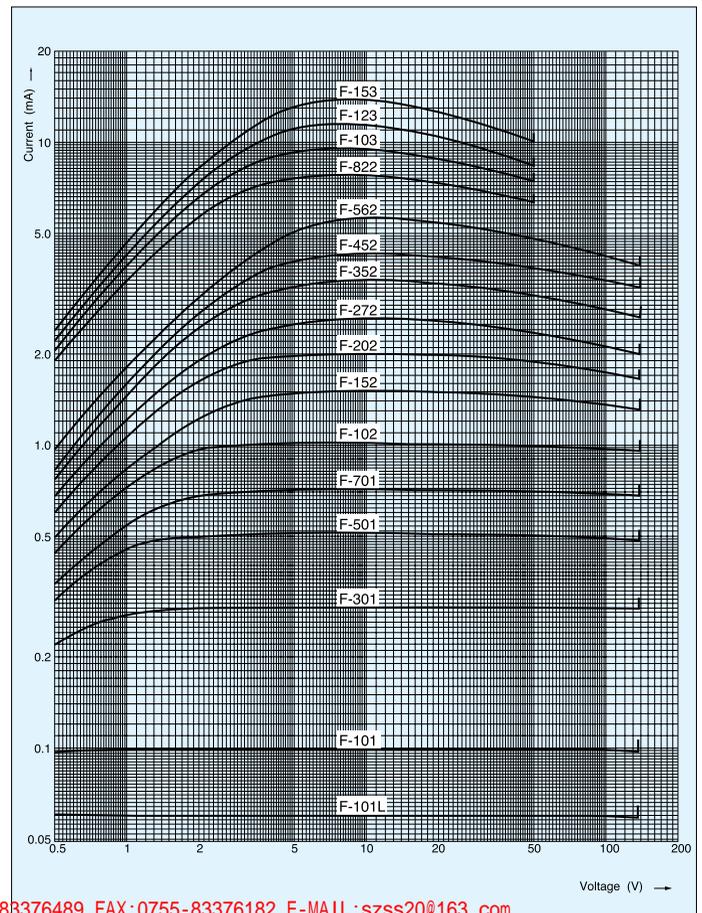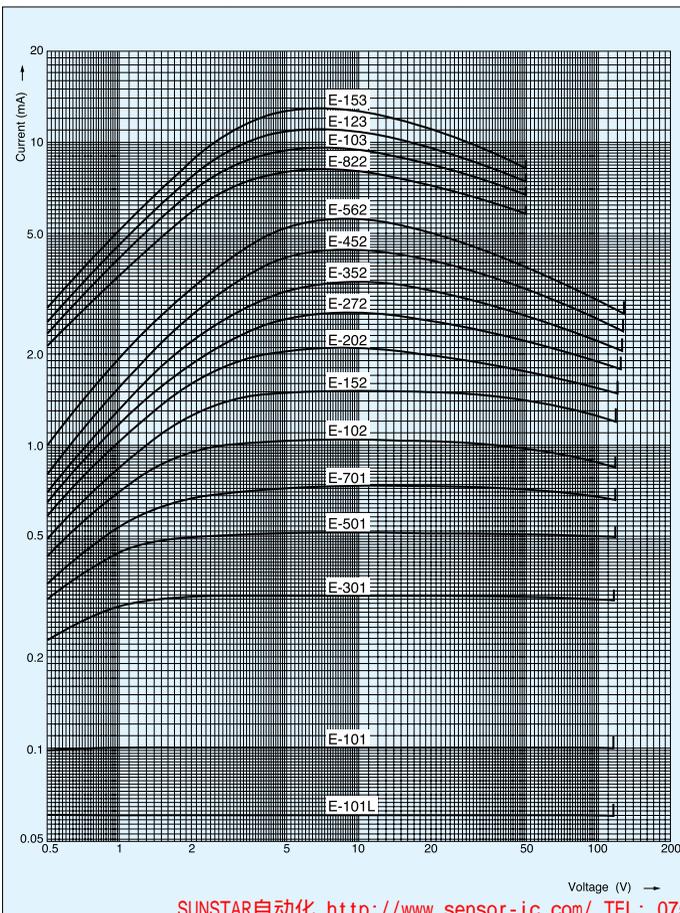

## METAL OXIDE VARISTOR

# ZENAMIC

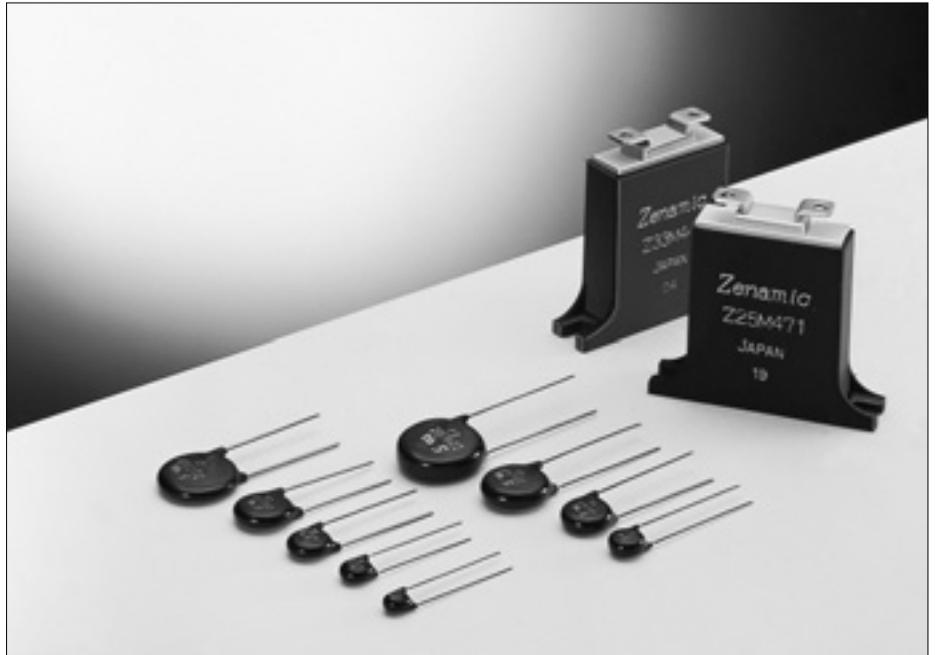



ZENAMIC is the product name of a metal oxide varistor. ZENAMIC Transient/Surge Absorber, Series D is newly released through our continued research in ceramic material composition of ZnO varistor and manufacturing process, featuring large surge current handling capability and energy handling capability for absorbing transient overvoltage in compact size.

### Features

- Improved in "Surge Current Handling Capability (at 8/20 $\mu$ s, 2 times)" by about 2 times over the current.
- Very large "Energy Handling Capability" absorbing transient overvoltages in compact sizes.
- Lower Clamping Voltage for better surge protection.
- Fast response to high speed transient/surge voltage.
- Wide products range for transient/surge protection on AC 100V to AC 480V nominal system with the maximum peak current ratings of 600A to 7000A (at 8/20  $\mu$ s, 2 times).

### V-I characteristics

ZENAMIC has the forward-reverse symmetrical electrical characteristics as shown in the figure 1. The voltage-current curves show the varistor characteristics in the range 1 μA to 10<sup>4</sup>A, and show the resistance characteristics for the range under 1 μA and over 10<sup>4</sup>A in the figure 2. The voltage across terminals when test current(I<sub>t</sub>: 1 mA) is applied to ZENAMIC is the standard varistor voltage(V<sub>Z</sub>), and the voltage across terminals when a standard surge(I<sub>p</sub>) is applied represents the maximum suppression voltage(V<sub>C</sub>).

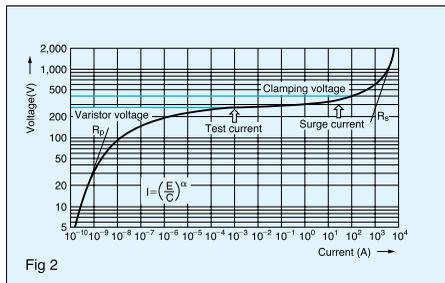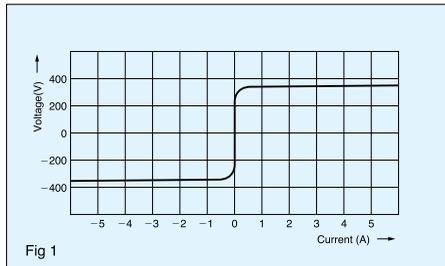


### Temperature characteristics

In the small current range, ZENAMIC features outstanding temperature characteristics. A shunt resistance R<sub>p</sub> of metal oxide varistor has the temperature characteristics which is determined by the following equation.

$$R_p = A e^{E_g / 2kT} \quad (2)$$


T: Absolute temperature  
k: Boltzmann constant  
A, E<sub>g</sub>: constants

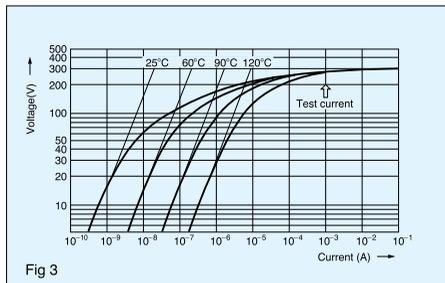


As shown in the figure 3, the temperature dependence characteristics are shown clearly in the low current area.

### Surge waveform

A surge waveform varies according to the sources. An EXP waveform is used for surge testing of ZENAMIC, while a AC half-wave is used for the energy absorption test. The EXP waveform reaches its peak voltage (current) at [t<sub>a</sub>] as shown in the figure 5, and then decreases as time passes and reaches half of the peak voltage (current) at [t<sub>b</sub>]. This type of the EXP waveform is shown as a [t<sub>a</sub>/t<sub>b</sub>] voltage (current) waveform. For surge testing of ZENAMIC, the 8/20 μsec current waveform is used.

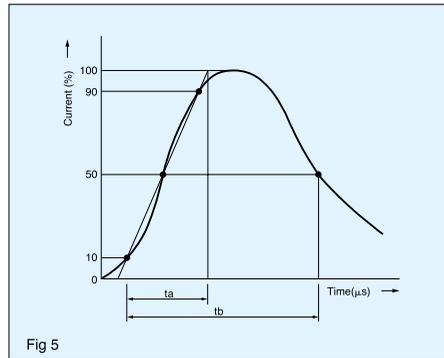


### Part Number.

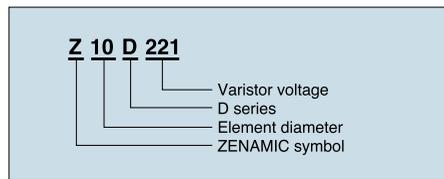

### Application notes(General)

1. A surge excess of the specified Maximum Peak Current may cause short circuit or mechanical damage. The following measures are recommended.

- In case that ZENAMIC is used in line to ground, the ground fault circuit interrupter shall be applied in location A or thermally coupled fuse shall be applied in location C.
- ZENAMIC shall not be used near heat generating device and free from direct sunlight.
- ZENAMIC shall not be used near the flammable materials.

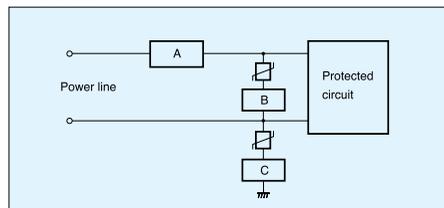

- 1) Location of the over current protector(circuit breaker or current fuse) shall be in the power line to the circuit(Location A) or in series with ZENAMIC (Location B).
- 2) It is recommended that a fuse listed in the table be put in location A or B.
- 3) In case that ZENAMIC is used in line to ground, the ground fault circuit interrupter should be applied in location A or thermally coupled fuse should be applied in location C.




Part Number	Z5D□□□	Z7D□□□	Z10D□□□
Rating of fuse	3A max.	5A max.	7A max.

Part Number	Z15D□□□	Z21D□□□
Rating of fuse	10A max.	15A max.

Refer to the related Safety Standards.

### Applications

Power lines and surge absorption units with error display (SA series).

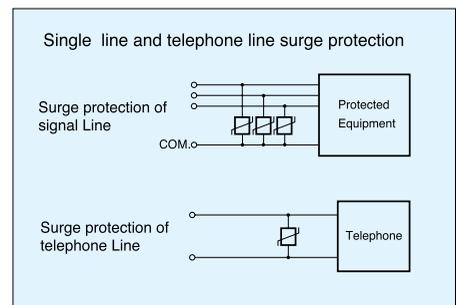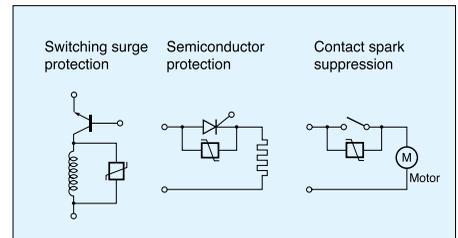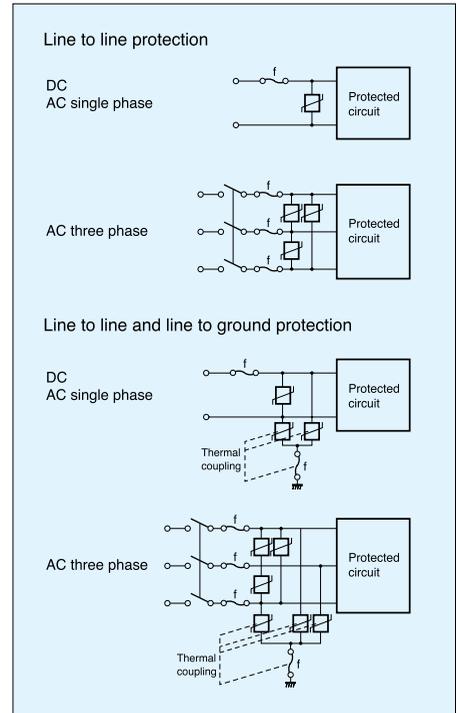

## Z7D Series

### Specifications

Part No.	Varistor Voltage	Maximum Allowable Voltage		Clamping Voltage (max.)	Rated Power	Maximum Energy		Maximum Peak Current (8/20μs) 2 times	Capacitance (TYP) 1kHz
		V <sub>1mA</sub> (V)	AC <sub>rms</sub> (V)			DC(V)	V(V)		
Z7D180	18(16-20)	11	14	36 at 2.5A	0.02	1.1	0.9	250	3800
Z7D220	22(20-24)	14	18	43	0.02	1.3	1.1	250	3600
Z7D270	27(24-30)	17	22	53	0.02	1.6	1.3	250	3400
Z7D330	33(30-36)	20	26	65	0.02	2.0	1.6	250	2900
Z7D390	39(35-43)	25	31	77	0.02	2.4	1.9	250	1600
Z7D470	47(42-52)	30	38	93	0.02	2.8	2.3	250	1550
Z7D560	56(50-62)	35	45	110	0.02	3.4	2.7	250	1500
Z7D680	68(61-75)	40	56	135	0.02	4.1	3.3	250	1200
*1 Z7D820	82(74-90)	50	65	135 at 10A	0.25	7	5	1250	810
*1 Z7D101	100(90-110)	60	85	165	0.25	8.5	6	1250	700
*1 Z7D121	120(108-132)	75	100	200	0.25	10	7	1250	590
*1 Z7D151	150(135-165)	95	125	250	0.25	13	9	1250	500
*1 Z7D201	200(185-225)	130	170	340	0.25	17.5	12.5	1250	200
*1 Z7D221	220(198-242)	140	180	360	0.25	19	13.5	1250	190
*1 Z7D241	240(216-264)	150	200	395	0.25	21	15	1250	170
*1 Z7D271	270(247-303)	175	225	455	0.25	24	17	1250	150
*1 Z7D331	330(297-363)	210	270	545	0.25	28	20	1250	130
*1 Z7D361	360(324-396)	230	300	595	0.25	32	23	1250	130
*1 Z7D391	390(351-429)	250	320	650	0.25	35	25	1250	130
*1 Z7D431	430(387-473)	275	350	710	0.25	40	27.5	1250	120
*1 Z7D471	470(423-517)	300	385	775	0.25	42	30	1250	100 *2
*1 Z7D511	510(459-561)	320	410	845	0.25	45	32	1250	90 *2

1. Operating temperature range: -40 to 85°C

2. Storage temperature range: -40 to 125°C

\*1 UL 1449 approved model

\*2 Measured at 1MHz

## Z10D Series

### Specifications

Part No.	Varistor Voltage	Maximum Allowable Voltage		Clamping Voltage (max.)	Rated Power	Maximum Energy		Maximum Peak Current (8/20μs) 2 times	Capacitance (TYP) 1kHz
		V <sub>1mA</sub> (V)	AC <sub>rms</sub> (V)			DC(V)	V(V)		
Z10D180	18(16-20)	11	14	36 at 5A	0.05	2.6	2.2	500	16000
Z10D220	22(20-24)	14	18	43	0.05	3.2	2.6	500	11000
Z10D270	27(24-30)	17	22	53	0.05	3.9	3.2	500	8000
Z10D330	33(30-36)	20	26	65	0.05	4.8	4.0	500	6300
Z10D390	39(35-43)	25	31	77	0.05	5.6	4.7	500	5200
Z10D470	47(42-52)	30	38	93	0.05	6.8	5.6	500	4600
Z10D560	56(50-62)	35	45	110	0.05	8.1	6.7	500	3750
Z10D680	68(61-75)	40	56	135	0.05	9.8	8.2	500	2800
* Z10D820	82(74-90)	50	65	135 at 25A	0.4	14	10	2500	2000
* Z10D101	100(90-110)	60	85	165	0.4	17	12	2500	1700
* Z10D121	120(108-132)	75	100	200	0.4	20	14.5	2500	1400
* Z10D151	150(135-165)	95	125	250	0.4	25	18	2500	1100
* Z10D201	200(185-225)	130	170	340	0.4	35	25	2500	430
* Z10D221	220(198-242)	140	180	360	0.4	39	27.5	2500	410
* Z10D241	240(216-264)	150	200	395	0.4	42	30	2500	380
* Z10D271	270(247-303)	175	225	455	0.4	49	35	2500	350
* Z10D331	330(297-363)	210	270	545	0.4	58	42	2500	300
* Z10D361	360(324-396)	230	300	595	0.4	65	45	2500	300
* Z10D391	390(351-429)	250	320	650	0.4	70	50	2500	300
* Z10D431	430(387-473)	275	350	710	0.4	80	55	2500	270
* Z10D471	470(423-517)	300	385	775	0.4	85	60	2500	230
* Z10D511	510(459-561)	320	410	845	0.4	92	67	2500	210
* Z10D561	560(504-616)	350	450	930	0.4	92	67	2500	200
* Z10D681	680(612-748)	420	560	1120	0.4	92	67	2500	170
* Z10D751	750(675-825)	460	615	1240	0.4	100	70	2500	160
* Z10D821	820(738-902)	510	670	1355	0.4	110	80	2500	140
* Z10D911	910(819-1001)	550	745	1500	0.4	130	90	2500	120
* Z10D102	1000(900-1100)	625	825	1650	0.4	140	100	2500	110

1. Operating temperature range: -40 to 85°C

2. Storage temperature range: -40 to 125°C

\* UL 1449 approved model

## Z15D Series

### Specifications

Part No.	Varistor Voltage	Maximum Allowable Voltage		Clamping Voltage (max.)	Rated Power	Maximum Energy		Maximum Peak Current (8/20μs) 2 times	Capacitance (TYP) 1kHz
		V <sub>1mA</sub> (V)	AC <sub>rms</sub> (V)			DC(V)	V(V)		
Z15D180	18(16-20)	11	14	36 at 10A	0.1	5.2	4.3	1000	25000
Z15D220	22(20-24)	14	18	43	0.1	6.3	5.3	1000	20000
Z15D270	27(24-30)	17	22	53	0.1	7.8	6.5	1000	16000
Z15D330	33(30-36)	20	26	65	0.1	9.5	7.9	1000	12200
Z15D390	39(35-43)	25	31	77	0.1	11	9.4	1000	7000
Z15D470	47(42-52)	30	38	93	0.1	14	11	1000	6750
Z15D560	56(50-62)	35	45	110	0.1	16	13	1000	6500
Z15D680	68(61-75)	40	56	135	0.1	20	16	1000	5500
* Z15D820	82(74-90)	50	65	135 at 50A	0.6	28	20	4500	3700
* Z15D101	100(90-110)	60	85	165	0.6	35	25	4500	3200
* Z15D121	120(108-132)	75	100	200	0.6	42	30	4500	2700
* Z15D151	150(135-165)	95	125	250	0.6	53	37.5	4500	2200
* Z15D201	200(185-225)	130	170	340	0.6	70	50	4500	770
* Z15D221	220(198-242)	140	180	360	0.6	78	55	4500	740
* Z15D241	240(216-264)	150	200	395	0.6	84	60	4500	700
* Z15D271	270(247-303)	175	225	455	0.6	99	70	4500	640
* Z15D331	330(297-363)	210	270	545	0.6	115	80	4500	580
* Z15D361	360(324-396)	230	300	595	0.6	130	90	4500	540
* Z15D391	390(351-429)	250	320	650	0.6	140	100	4500	500
* Z15D431	430(387-473)	275	350	710	0.6	155	110	4500	450
* Z15D471	470(423-517)	300	385	775	0.6	175	125	4500	400
* Z15D511	510(459-561)	320	410	845	0.6	190	136	4500	350
* Z15D561	560(504-616)	350	450	930	0.6	190	136	4500	340
* Z15D681	680(612-748)	420	560	1120	0.6	190	136	4500	320
* Z15D751	750(675-825)	460	615	1240	0.6	210	150	4500	310
* Z15D821	820(738-902)	510	670	1355	0.6	235	165	4500	280
* Z15D911	910(819-1001)	550	745	1500	0.6	255	180	4500	250
* Z15D102	1000(900-1100)	625	825	1650	0.6	280	200	4500	230

1. Operating temperature range: -40 to 85°C \* UL 1449 approved model  
 2. Storage temperature range: -40 to 125°C





## Z21D Series

### Specifications


Part No.	Varistor Voltage	Maximum Allowable Voltage		Clamping Voltage (max.)	Rated Power	Maximum Energy		Maximum Peak Current (8/20μs) 2 times	Capacitance (TYP) 1kHz
		V <sub>1mA</sub> (V)	AC <sub>rms</sub> (V)			DC(V)	V(V)		
Z21D180	18(16-20)	11	14	36 at 20A	0.2	13	12	2000	40000
Z21D220	22(20-24)	14	18	43	0.2	16	14	2000	30000
Z21D270	27(24-30)	17	22	53	0.2	19	17	2000	24500
Z21D330	33(30-36)	20	26	65	0.2	24	21	2000	20000
Z21D390	39(35-43)	25	31	77	0.2	28	25	2000	13800
Z21D470	47(42-52)	30	38	93	0.2	34	30	2000	13500
Z21D560	56(50-62)	35	45	110	0.2	41	36	2000	12200
Z21D680	68(61-75)	40	56	135	0.2	49	44	2000	11500
* Z21D820	82(74-90)	50	65	135 at 100A	1.0	56	40	6500	7500
* Z21D101	100(90-110)	60	85	165	1.0	70	50	6500	6500
* Z21D121	120(108-132)	75	100	200	1.0	85	60	6500	5500
* Z21D151	150(135-165)	95	125	250	1.0	106	75	6500	4500
* Z21D201	200(185-225)	130	170	340	1.0	140	100	6500	1700
* Z21D221	220(198-242)	140	180	360	1.0	155	110	6500	1600
* Z21D241	240(216-264)	150	200	395	1.0	168	120	6500	1500
* Z21D271	270(247-303)	175	225	455	1.0	190	135	6500	1300
* Z21D331	330(297-363)	210	270	545	1.0	228	160	6500	1100
* Z21D361	360(324-396)	230	300	595	1.0	255	180	6500	1100
* Z21D391	390(351-429)	250	320	650	1.0	275	195	6500	1100
* Z21D431	430(387-473)	275	350	710	1.0	303	215	6500	1000
* Z21D471	470(423-517)	300	385	775	1.0	350	250	6500	900
* Z21D511	510(459-561)	320	410	845	1.0	382	273	6500	800
* Z21D561	560(504-616)	350	450	930	1.0	382	273	6500	750
* Z21D681	680(612-748)	420	560	1120	1.0	382	273	6500	650
* Z21D751	750(675-825)	460	615	1240	1.0	420	300	6500	600
* Z21D821	820(738-902)	510	670	1355	1.0	460	325	6500	530
* Z21D911	910(819-1001)	550	745	1500	1.0	510	360	6500	500
* Z21D102	1000(900-1100)	625	825	1650	1.0	565	400	6500	450

1. Operating temperature range: -40 to 85°C \* UL 1449 approved model  
 2. Storage temperature range: -40 to 125°C

Dimensions

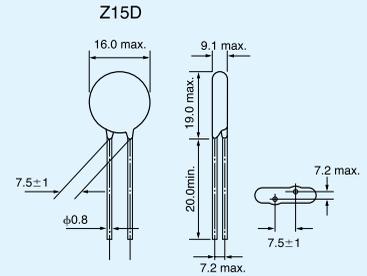


Crimped Leads and Taped  
Z7D□□□ T4C

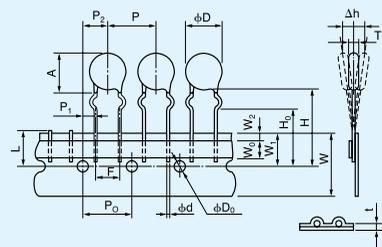

\*Dimension "T": Conforms to each individual specification  
\*Packing quantity: 1000pcs/BOX

Symbol	Type I	Symbol	Type I
P	12.7±1.0	W <sub>0</sub>	5.0min
P <sub>0</sub>	12.7±0.3	W <sub>1</sub>	9.0±0.5
P <sub>1</sub>	3.85±0.70	W <sub>2</sub>	3max
P <sub>2</sub>	6.35±1.30	H	Approx. 22
φd	0.60 <sup>+0.06</sup> <sub>-0.05</sub>	H <sub>0</sub>	17.0±0.5
F	5.0±0.5	φD <sub>0</sub>	φ4.0±0.2
Δh	0±2	t	0.6±0.3
W	18.0 <sup>+1.0</sup> <sub>-0.5</sub>	L	11max
φD	Z5D:7max, Z7D:8.5max		

Straight Leads and Taped  
Z7D□□□ T4D

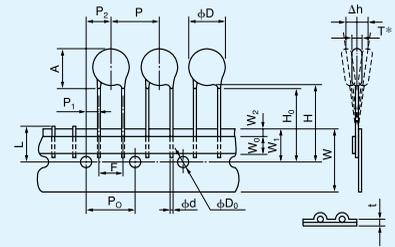

\*Dimension "T": Conforms to each individual specification  
\*Packing quantity: 1000pcs/BOX

Symbol	Type I	Symbol	Type I
P	12.7±1.0	W <sub>0</sub>	5.0min
P <sub>0</sub>	12.7±0.3	W <sub>1</sub>	9.0±0.5
P <sub>1</sub>	3.85±0.70	W <sub>2</sub>	3max
P <sub>2</sub>	6.35±1.30	H	Approx. 20
φd	0.60 <sup>+0.06</sup> <sub>-0.05</sub>	H <sub>0</sub>	17.0±0.5
F	5.0±0.5	φD <sub>0</sub>	φ4.0±0.2
Δh	0±2	t	0.6±0.3
W	18.0 <sup>+1.0</sup> <sub>-0.5</sub>	L	11max
		φD	Z5D:7max, Z7D:8.5max

Unit(mm)


## Z25M, Z33M Series

### Specifications

Part No.	Varistor voltage $V_{1mA}(V)$		Maximum allowable voltage		Clamping voltage	Rated power	Maximum energy (2ms)	Withstanding surge current (8/20 $\mu$ s)	Capacitance (TYP) (1kHz)		
			AC	DC							
	Min	Max	$V_{rms}$	V	V	W	J	2 Times	pF		
Z25M221S	220(187 ~253 )		120	165	380 at 150A	1.0	125	10000A	3300		
Z25M271S	270(229.5~310.5)		150	210	465		155		2200		
Z25M331S	330(280.5~379.5)		175	245	570		185		1900		
Z25M391S	390(331.5~448.5)		210	295	675		215		1700		
Z25M441S	440(374 ~506 )		240	335	760		225		1500		
Z25M471S	470(399.5~540.5)		250	350	810		235		1500		
Z25M561S	560(476 ~644 )		300	420	970		260		1400		
Z25M681S	680(578 ~782 )		365	510	1175		280		1250		
Z25M821S	820(697 ~943 )		440	615	1415		330		800		
Z25M102S	1000(850 ~1,150)		520	730	1725		375		500		
Z33M221S	220(187 ~253 )		120	165	380 at 200A		1.2		200	20000A	5500
Z33M271S	270(229.5~310.5)		150	210	465				255		4200
Z33M331S	330(280.5~379.5)		175	245	570	310		3700			
Z33M391S	390(331.5~448.5)		210	295	675	360		3200			
Z33M441S	440(374 ~506 )		240	335	760	370		2800			
Z33M471S	470(399.5~540.5)		250	350	810	385		2600			
Z33M561S	560(476 ~644 )		300	420	970	425		2200			
Z33M681S	680(578 ~782 )		365	510	1175	460		1800			
Z33M821S	820(697 ~943 )		440	615	1415	580		1500			
Z33M102S	1000(850 ~1150)		520	730	1725	620		1000			

1. Operating temperature range: -40 to 85°C
2. Storage temperature range: -40 to 125°C

### Dimensions

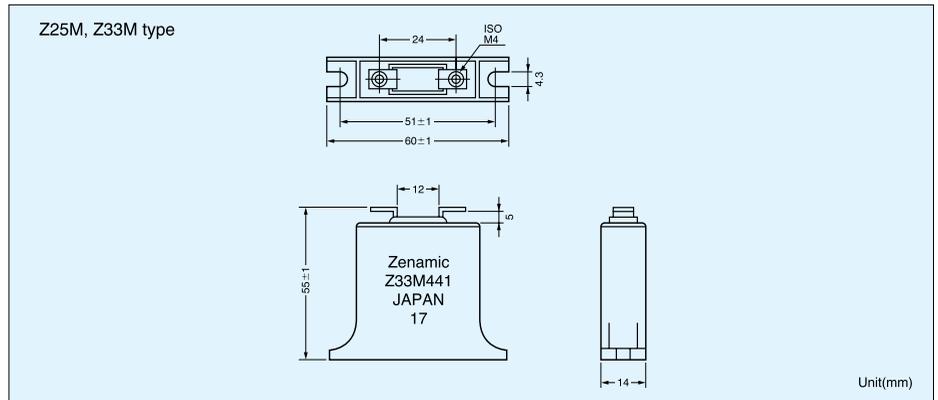

# GASTUBE ARRESTER

Gas tube arrester(GTA)is a surge absorber featuring low capacitance and high surge absorption energy.


It consists of a sealed tube in which inert gas is injected and electrodes which are set at fixed intervals. The simple structure and the dimensional accuracy offer high reliability and stabilized characteristics.

## Applications

1. Protection for telephone set, facsimile, telex, telephone system, CATV, computer and peripheral equipment.
2. Semiconductor circuit protection in equipment that also uses high voltage such as TV, oscilloscope, and electron microscope.
3. Automatic control of luminous energy in stroboscopic tube.
4. Generator of high-voltage for gas igniter.

## Voltage-Current Characteristics

The current through the GTA is changed over the range of values of  $10^{-18}$  to  $10^2$  amps which is shown as the figure below and the voltage across the GTA will also vary. The discharge characteristics are changed to various mode by the flowing current, and the final mode of the discharge characteristics is arc discharge.

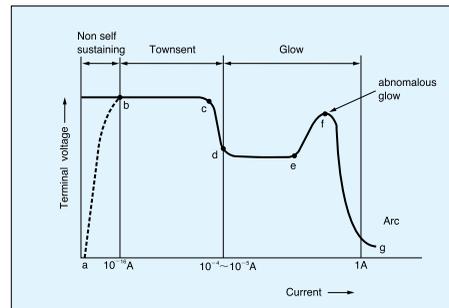

When the applied voltage across the GTA exceeds the breakdown voltage (sparkover voltage), the current through the GTA increases rapidly to value of several amps or greater. The rate of current rise and level to be reached are limited by the series impedance of the circuit. The voltage across the GTA at this time is very low with typical value of 20 to 30 volts.

## Electrical Characteristics

### AC Discharge Current

The current is the rms value of sinusoidal alternating current of 50Hz or 60Hz which can flow through the GTA in accordance with a certain test method without substantially altering its sparkover voltage. The usual test consists of specified loads applied for 1 sec at interval of 1 min alternately. In the test of the maximum AC discharge current, the GTA is applied 9 cycles of 50Hz AC(180 ms) continuously.

### Impulse Surge Life

The life is defined as the minimum number of surges of a certain current waveform the GTA can survive without deterioration of its operating specifications.

### Insulation Resistance

This is defined as the resistance value across the terminal of GTA at 100V<sub>DC</sub> for devices over 230V<sub>DC</sub> (140V<sub>DC</sub> for GTA type) breakdown voltage and 50V<sub>DC</sub> for devices less than 230V<sub>DC</sub>(140V<sub>DC</sub> for GTA type) ratings.

### DC Breakdown Voltage

The voltage is the minimum slowly rising DC voltage that will cause sparkover when applied across the terminal of the GTA. The GTA shall be placed in darkness for at least 15 min and tested in this condition using a ramp voltage waveform with 100V/s to 500V/s.

The GTA shall be tested with a positive and a negative waveform. The sparkover current for DC sparkover voltage test shall be within 10 amps.

### Impulse Breakdown Voltage

The GTA to be exposed to the test shall be kept in total darkness before (for at least 15 min) and during the test. Then, with a ramp voltage with 5kV/ $\mu$ s applied to the GTA, the breakdown voltage level is recorded. In case of testing with opposite polarity, using the same GTA, a minimum of 15 min shall elapse.

## Maximum Single Impulse Discharge Current

This test is to determine the ability of the GTA to conduct a maximum single impulse Discharge current. The current impulse waveform is 8/20 $\mu$ s. The maximum single impulse discharge current is the crest current of the impulse.

## Capacitance


The capacitance of the GTA is defined as capacitance across terminals of the GTA at 1 kHz.

## Operating Temperature Range

-20°C~65°C


## DC Holdover Voltage

This values is defined as the maximum DC voltage across the terminals of the GTA which is expected to clear and restore its high impedance state within 150 ms or less after the passage of a surge.

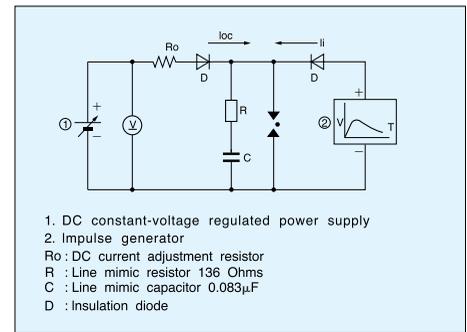

## Impulse Waveform

Impulse breakdown voltage is the voltage at which the GTA fires when the voltage increases at rates of more than 100V/ $\mu$ s. This value may not vary even after the GTA has been stored in the dark for long period. The value of the impulse breakdown voltage increases with increasing steepness of the surge voltage as the figure below.


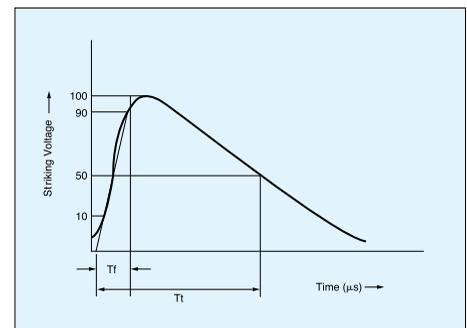


# CM2P type

A ceramic tube is sealed at both side by electrodes, and inside of it is filled up by inert gas. The ceramic type gas tube arrester has superior characteristics

such as mechanical strength, surge absorption energy and stability. There are two electrodes type and three electrodes type.

## Dimensions

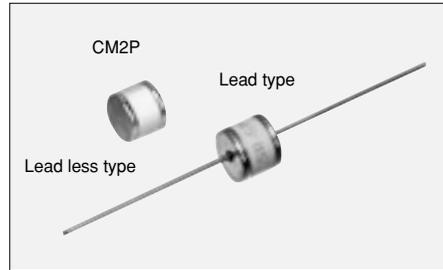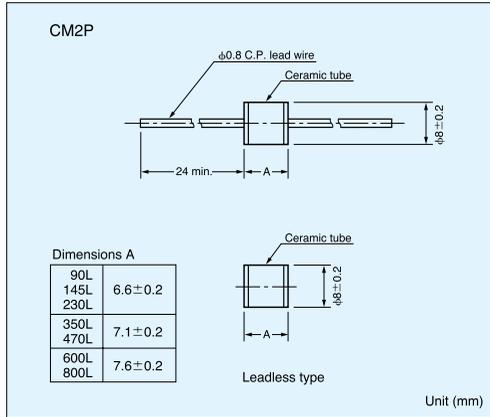


## Specifications

Part No.	DC Breakdown Voltage (100V/s)	Impulse Breakdown Voltage (5kV/μs)	Nominal Impulse Discharge Current (8/20μs)	Impulse Life (10/1000μs)	Insulation Resistance (DC100V or 50V)	Capacitance (1kHz)
CM2P-90L	90V±20%	1000V max.	10000A×2 times	500A×600 times	10 <sup>4</sup> MΩ min.	2pF max.
CM2P-145L	145V±20%	1000V max.	10000A×2 times	500A×600 times	10 <sup>4</sup> MΩ min.	2pF max.
CM2P-230L	230V±15%	1000V max.	10000A×2 times	500A×600 times	10 <sup>4</sup> MΩ min.	2pF max.
CM2P-350L	350V±15%	1500V max.	10000A×2 times	500A×600 times	10 <sup>4</sup> MΩ min.	2pF max.
CM2P-470L	470V±15%	1500V max.	10000A×2 times	500A×600 times	10 <sup>4</sup> MΩ min.	2pF max.
CM2P-600L	600V±15%	1800V max.	10000A×2 times	500A×600 times	10 <sup>4</sup> MΩ min.	2pF max.
CM2P-800L	800V±15%	2000V max.	10000A×2 times	500A×600 times	10 <sup>4</sup> MΩ min.	2pF max.

● Suffix : L shows lead type and no-suffix shows leadless type


## V-t Characteristics

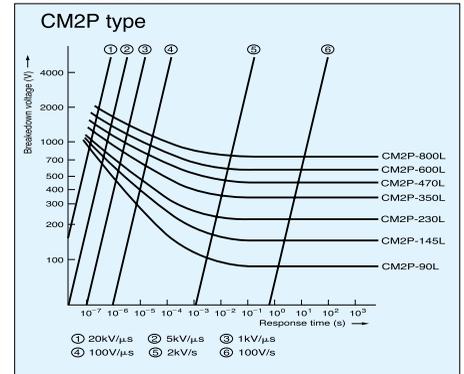

# GTA type

Electrodes are set in a sealed glass, and inert gas is filled inside.

## Dimensions

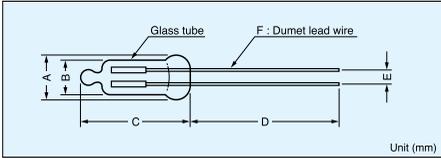


	GTA-80D~GTA-500D	GTA-750D,800D
A	6.6max.	7.0max.
B	$\phi 5.85 \pm 0.3$	$\phi 6.5 \pm 0.3$
C	19max	19max
D	25min.	25min.
E	3min.	3min.
F	$\phi 0.45$	$\phi 0.45$

Unit (mm)



## V-t Characteristics

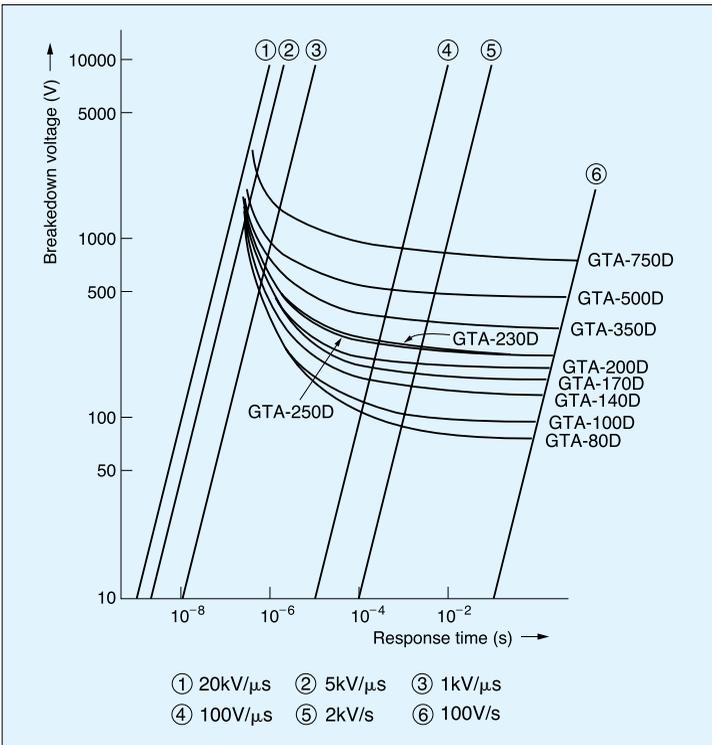

## Specifications



Part No.	DC Breakdown Voltage (100V/s)	Impulse Breakdown Voltage (5kV/ $\mu$ s)	Nominal Impulse Discharge Current (8/20 $\mu$ s)	Impulse Life (8/20 $\mu$ s)	Insulation Resistance (DC100V or 50V)	Capacitance (1kHz)
GTA-80D	80V $\pm$ 15%	1200V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.
GTA-100D	100V $\pm$ 15%	1300V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.
GTA-140D	140V $\pm$ 15%	1300V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.
GTA-170D	170V $\pm$ 15%	1500V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.
GTA-200D	200V $\pm$ 15%	1700V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.
GTA-230D	230V $\pm$ 15%	1700V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.
GTA-250D	250V $\pm$ 15%	1700V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.
GTA-350D	350V $\pm$ 15%	2000V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.
GTA-500D	500V $\pm$ 15%	2100V max.	1500A $\times$ 1 time	500A $\times$ 1000 times	10 <sup>2</sup> M $\Omega$ min.	2pF max.

# SA01 type

The SA01 is a new product which can be utilized for protecting transient voltage in power supply of equipment with earth terminal.

For the equipment in which SA01 is used, the AC withstanding voltage between power lines and earth terminal can be tested without taking off "SA01".

## Dimensions

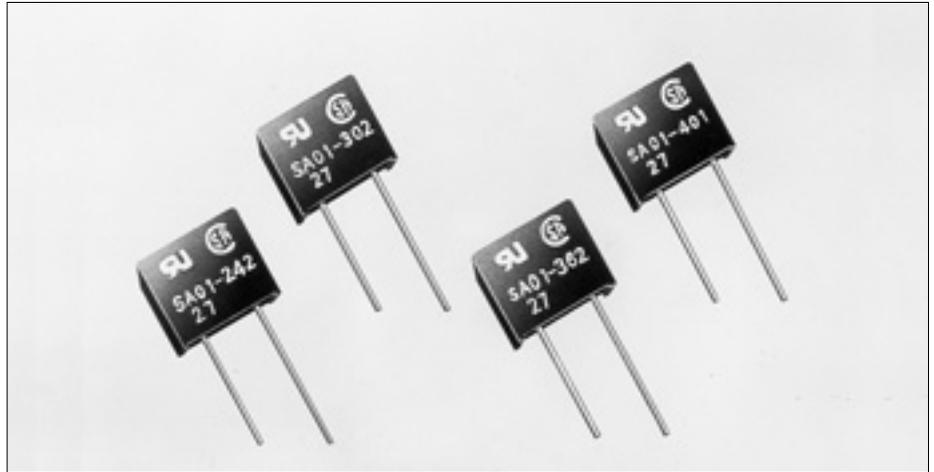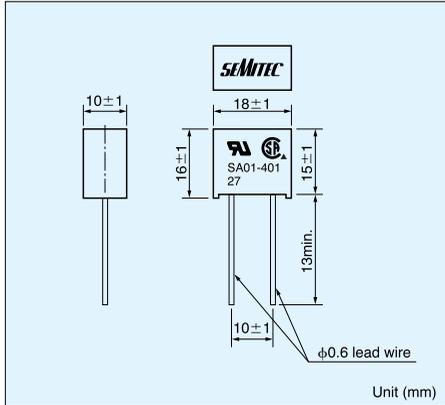


## Safety Standards

Standards Name	UL	CSA	TÜV
Standards No.	UL1449	C22.2 No.1	IEC61051
File No.	E128417	LR-76099	J50015463
Mark			—

## Specifications

Part No.	DC Breakdown Voltage (100V/s)	Impulse Breakdown Voltage (5kV/μs)	Nominal Impulse Discharge Current(8/20μs)	Impulse Life (8/20μs)	Insulation Resistance (DC100V)	Capacitance (1kHz)	Connection	Dielectric Withstanding Voltage
SA01-401	400V $\pm 20\%$	1000V max.	1250A×2 times	100A×300 times	10 <sup>2</sup> MΩ min	2pF max.	AC125V (Line-Line)	—
SA01-501	500V $\pm 20\%$	1400V max.	1250A×2 times	100A×300 times	10 <sup>2</sup> MΩ min	2pF max.	AC250V (Line-Line)	—
SA01-242	2400V $\pm 20\%$	4000V max.	1250A×2 times	100A×300 times	10 <sup>2</sup> MΩ min	2pF max.	AC125V (Line-GND)	AC1200V 3s
SA01-302	3000V $\pm 20\%$	4500V max.	1250A×2 times	100A×300 times	10 <sup>2</sup> MΩ min	2pF max.	AC250V (Line-GND)	AC1500V 1min
SA01-362	3600V $\pm 20\%$	5000V max.	1250A×2 times	100A×300 times	10 <sup>2</sup> MΩ min	2pF max.	AC250V (Line-GND)	AC1800V 3s

## Application Circuit

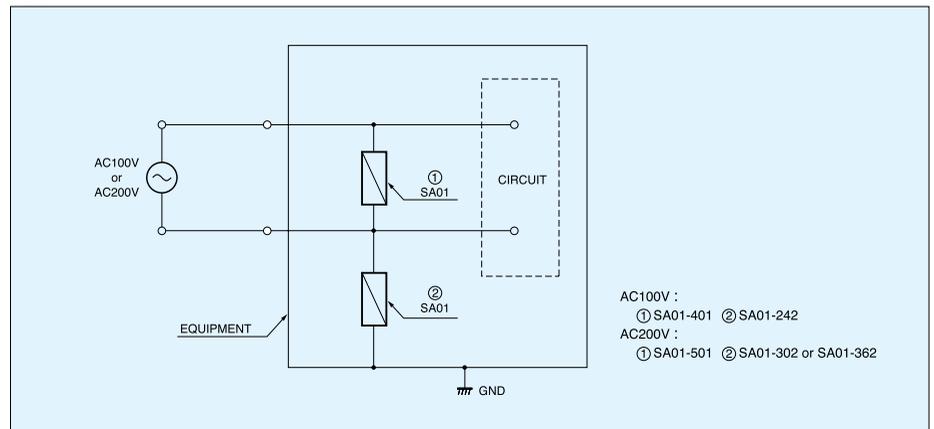

SUNSTAR商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——中国传感器科技信息网（全球传感器数据库）[www.SENSOR-IC.COM](http://www.SENSOR-IC.COM) 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到中国，共同开拓市场。本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学研究、产品设计、开发、生产制造的科技人员、管理人员、和采购人员提供满意服务。我们公司专业生产、代理、经销、销售各种传感器、变送器、敏感元器件、开关、执行器、仪器仪表、自动化控制系统：专门从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达军工产品网：<http://www.junpinic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83607652 83376489 83376549 83370250 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: [SUNS888@hotmail.com](mailto:SUNS888@hotmail.com)

邮编：518033 E-mail: [szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382