

FIS GAS SENSOR **SB-30** for ALCOHOL DETECTION


The SB-30 is a tin dioxide semiconductor gas sensor which has a high sensitivity to alcohol with quick response speed. This model is suitable for alcohol detection such as portable breath alcohol checker or ignition locking system in automobles.


Structure

Gas sensitive semiconductor material is a mini bead type and a heater coil and electrode wire are embedded in the element. The sensing element is installed in the metal housing which uses double stainless steel mesh (100 mesh) in the path of gas flow. The mesh is an anti-explosion feature (Fig 1).

Operating conditions

Fig 2 shows the standard operating ciruit for this model. The change of the sensor resistance (R_S) is obtained as the change of the output voltage across the fixed or variable resistor (R_L). In order to obtain the best performance and specified characteristics, the values of the heater voltage (V_C) and load resistance (R_L) must be within the range of values given in the standard operating conditions shown in the Specification table on the next page.








Fig 1c. Pin Layout

Sensitivity characteristics

Fig 3 shows the sensitivity characteristics curves of the SB-30 (typical data). Sensitivity characteristics of the FIS gas sensors are expressed by the relationship between the sensor resistance and gas concentration. The sensor resistance decreases with an increase of gas concentration based on a logarithmic function.




Fig 1b. Configuration





Fig 1d. Equivalent circuit

The sensitivity characteristics of the SB-30 is specified by the following parameters.

- Sensor resistance level: at ethanol 300 ppm
- Sensor resistance change ratio: between ethanol 50 ppm and 300 ppm

See the specification table on the next page for further details.

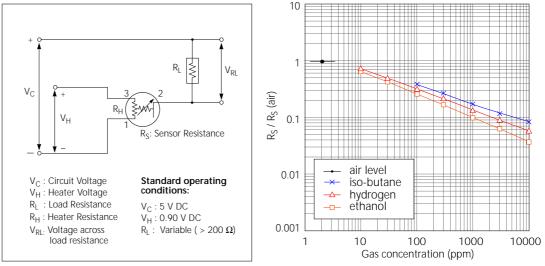

SPECIFICAIONS

Fig 2. Standard circuit

Fig 3. Sensitivity characteristics

SUNSTAR自动化 http://www.sensor-ic.com/ TEL: 0755-83376489 FAX:0755-83376182 E-MAIL: szss20@163.com

SB-30

Specifications

A. Standard Operating conditions

Symbol	Parameter	Specification	Conditions etc.
V _H	Heater voltage	0.9 V ± 0.05V	AC or DC
V _C	Circuit voltage	Less than 5 V	DC (polarity is important)
RL	Load resistance	Variable (> 200 Ω)	P _S < 10 mW
R _H	Heater resistance	$2.8 \Omega \pm 0.2 \Omega$	at room temperature
I _H	Heater current	130 mA	$I_{H} = V_{H} / R_{H}$ (typical value)
P _H	Heater power consumption	120 mW	$P_{H} = V_{H}^{2} / R_{H}$ (typical value)
P _S	Power dissipation of sensing element	Less than 10 mW	$P_{S} = \frac{(V_{C} - V_{RL})^{2}}{R_{S}}$

B. Environmental conditions

Symbol	Parameter	Specification	Conditions etc.
Тао	Operating temperature	-20°C to 50 °C	
Tas	Storage temp	-20 °C to 70 °C	Recommended range
RH	Relative humidity	Less than 95% RH	
(O ₂)	Oxygen concentration	21% ± 1% (Standard condition)	Absolute minimum level: more than 18%
		The sensitivity characteristics are influenced by the variation in oxygen concentration.	


C. Sensitivity characteristics

Model	SB-30-00 (tentative specifications)		
Symbol	Parameter	Specification	Conditions etc.
R _S	Sensor resistance	(0.5 kΩ to 5.0 kΩ)	at ethanol 300 ppm
β	Sensitivity	(0.50 ± 0.15)	Rs (at ethanol 300 ppm)
			Rs (at ethanol 50 ppm)
Standard Test Conditions:		Humidity: 65% ± 5%	$V_{C} : 5.0 V \pm 1\% V_{H} : 0.9 V \pm 1\% R_{L} : 750 \Omega \pm 5\%$
Pre-heating time: more than 48 hours		pre than 48 hours	

D. Mechanical characteristics

Items	Conditions		Specifications
Vibration	Frequency: Vertical amplitude: Duration:	100 cpm 4 mm 1 hour	Should satisfy the specifications shown in the
Shock	Acceleration: Number of impacts:	100 G 5 times	sensitivity characteristics.

Please contact

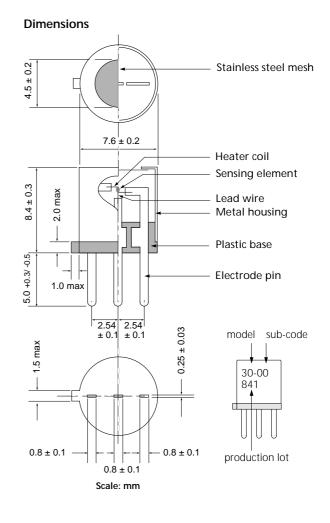

E. Parts and Materials

No.	Parts	Materials
1	Sensing element	Tin dioxide (SnO ₂)
2	Lead wire	Platinum
3	Heater coil	Platinum
4	Plastic base	PBT (Poly butylene terephthalate)
5	Stainless steel mesh	SUS 316 (100 mesh, double)
6	Metal housing	Nickel plated brass
7	Electrode pins	Iron-nickel alloy

Temporary version: May, 1999

FiS Inc. 3-36-3 Kitazono, Itami, Hyogo. 664-0891 Japan Tel: +81-727-80-1800 Fax: +81-727-85-0073 http://www.fisinc.co.jp/