


pecification

# **O2-G1 Oxygen Sensor**

### Figure 1 O2-G1 Schematic Diagram

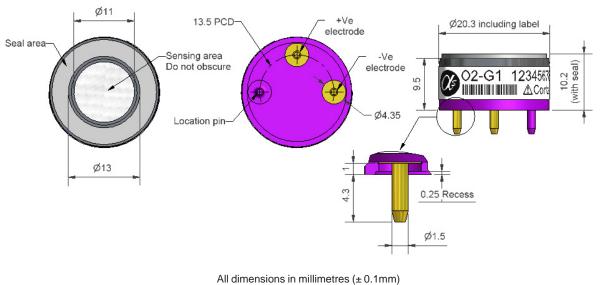

### Table 1 O2-G1 Specification

**Top View** 

PERFORMANCE	Output	μA @ 22°C, 20.9% O <sub>2</sub>	65 to 80
	Response time	t90 (s) from 20.9% to 0% $O_2$ (47 $\Omega$ load resistor)	< 15
	Zero current	μA @ 99.999% N <sub>2</sub> , 22°C	< 2
	Pressure sensitivity	(% change of output)/(% change of pressure) @ 20kPa	< 0.1

**Bottom View** 


**Side View** 

LIFETIME	Output drift Operating life	% change in output @ 3 months months until 85% original output in 20.9% O <sub>2</sub>	< 2 > 12
ENVIRONMENTAL	Humidity sensitivity CO <sub>2</sub> sensitivity Output at -20°C Output at +50°C	% O <sub>2</sub> change: 0% to 95% rh @ 40°C % change in output / % CO <sub>2</sub> @ 5% CO <sub>2</sub> % output/output at 20°C in 20.9% O <sub>2</sub> % output/output at 20°C in 20.9% O <sub>2</sub>	< 0.7 + 0.1 87 to 93 103 to 107
KEY SPECIFICATIONS	Temperature range Pressure range Humidity range Storage period Load resistor Weight	$^{\circ}\text{C}$ kPa $^{\circ}\text{rh}$ rh continuous (0 to 99% rh short term) months @ 3 to 20°C (store in sealed container) $\Omega$ (recommended) g	-30 to 55 80 to 120 5 to 95 6 47 to 100 <7

**NOTE:** all sensors are tested at ambient environmental conditions, with 47 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.




## **02-G1 Performance Data**

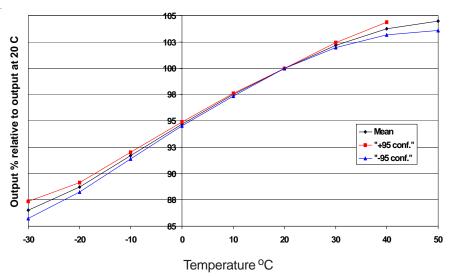

## Figure 2 Temperature Performance

Figure 2 shows the variation of output caused by changes in temperature in 20.9% oxygen.


All capillary oxygen sensors show a change in signal with temperature, and the very repeatable 95% confidence intervals for the O2-G1 are shown.

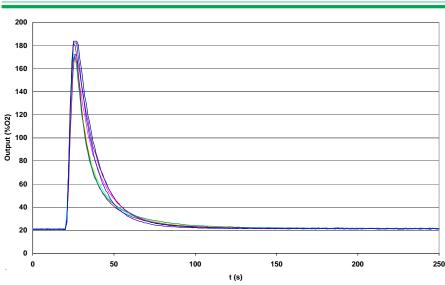

## Figure 3 Pressure Step Performance

Figure 3 shows how a 25 kPa pressure step change causes a signal transient that decays reproducibly. Negative pressure changes cause a negative transient.

The small shift in final output is less than 10% of the pressure change, so 10kPa pressure step shifts output by less than 1% (<0.2% oxygen).

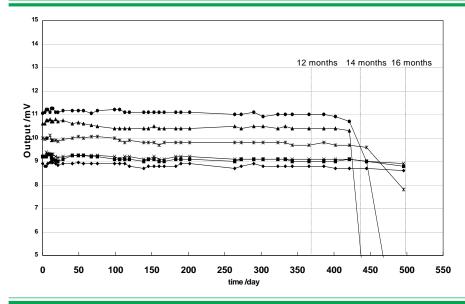

### Figure 4 Long Term Stability

Figure 4: shows long term stability data for the O2-G1 sensors.

All sensors show stable outputs beyond the 12 month period.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. For Application Notes visit "www.alphasense.com".