

SOLID STATE RELAY (I/O Module)

MAXIMUM LOAD CURRENT 1 A

SN SERIES

■ FEATURES

- I/O modules for interface between CPU and external input devices or loads
- Ultra slim and light weight, SIL terminals type I/O modules for high density mounting
 - Size: 5 (W) × 20 (L) × 17 (H) mm
 - Weight: approximately 3.0 to 3.5 g
- High isolation by employing photo-coupled devices (between input and output: 2,500 V rms)
- Long life and maintenance free
- All solid state I/O module
- Compatible with NY relay size and terminals arrangement (only output module type)



■ ORDERING INFORMATION

● INPUT MODULE

[Example] $\frac{SN}{(a)} - \frac{A}{(b)} \frac{100}{(c)} \frac{BF}{(d)}$

(a)	Series Name	SN : SN Series
(b)	Input Voltage	A : AC type D : DC type
(c)	Nominal Voltage	100 : 100 VAC 200 : 200 VAC 12/24 : 12/24 VDC
(d)	Buffer	BF : Buffer type (AC type) B : Buffer type (DC type)

● OUTPUT MODULE

[Example] $\frac{SN}{(a)} - \frac{12}{(b)} \frac{D}{(c)} \frac{01}{(d)} \frac{HZ}{(e)} - \frac{C}{(f)} \frac{R}{(g)} \frac{T}{(h)}$

(a)	Series Name	SN : SN Series
(b)	Nominal Voltage (Input side)	3 : 3 VDC (only AC type) 5 : 5 VDC 12 : 12 VDC 24 : 24 VDC
(c)	Load Voltage	A : AC type D : DC type
(d)	Load Current	01 : 1 A
(e)	Kinds of Inverse Connection Protecting Element	Nil : Diode HZ : Zener diode
(f)	Terminal Classification	Nil : PC board mounting type C : Socket mounting type
(g)	Output Polarity (DC type)	Nil : Standard polarity R : Reverse polarity
(h)	Switching Speed (DC type)	Nil : Standard T : High speed type

■ SPECIFICATIONS

• INPUT MODULE (SN-() B Type)

Item		AC Input module		DC Input module		Remarks
		100 VAC Type	200 VAC Type	12/24 VDC Type		
INPUT side	Input Voltage Range	80 to 132 Vrms	160 to 265 Vrms	9.6 to 28.8 VDC		
	Rating Input Current	Approx. 7 mArms		Approx. 5 mA (at 12 VDC)	Approx. 10 mA (at 24 VDC)	
	Power Frequency Range	47 to 63 Hz		—	—	
	Must Operate Voltage	80 Vrms	160 Vrms	9.6 VDC		
	Must Release Voltage	30 Vrms	60 Vrms	5.0 VDC		
	Must Release Current	2 mArms		1.5 mA		
OUTPUT side	DC Supply Voltage	4 to 6 VDC				V _{DD}
	Maximum Output Current	±4 mA		±0.4 mA		V _{DD} = 5 V
	Output Logic	Operate with negative true logic (active low)				
Maximum Operate Time		25 ms		10 ms		
Maximum Release Time		30 ms		10 ms		
Insulation Resistance		Minimum 1,000 MΩ (at 500 VDC)				for input-output
Dielectric Strength		2,500 Vrms 1 minute				
Operating Temperature Range		-30°C to + 85°C				
Storage Temperature Range		-40°C to +100°C				
Case Color		Yellow		White		
Weight		Approximately 2.9 g				

• OUTPUT MODULE Standard Type


Item		AC Output module	DC Output module	Remarks
INPUT side	Nominal Voltage (DC)	3 V, 5 V, 12 V, 24 V	5 V, 12 V, 24 V	
	Operate Voltage Range	±20% of nominal voltage		
	Must Operate Voltage	80% of nominal voltage		
	Must Release Voltage	Minimum 1 V (minimum 0.5 V*)		*3 VDC type
	Input Impedance	3 VDC Type	180 Ω ±10%	—
5 VDC Type		390 Ω ±10%		
12 VDC Type		1,200 Ω ±10%		
24 VDC Type		2,700 Ω ±10%	2,400 Ω ±10%	
OUTPUT side	Load Voltage Range	24 to 265 Vrms	3 to 30 VDC	
	Maximum Load Current	1.0 Arms	1.0 A	see CHARACTERISTIC DATA
	Minimum Load Current	10 mArms	1 mA	
	1 Cycle Surge Current	50 A (60 Hz)	3 A (10 ms)	
	Max. Off-State Leakage Current	1.5 mArms (at 100 Vrms 60 Hz) 3.0 mArms (at 200 Vrms 60 Hz)	0.1 mA (at 30 VDC)	
	Max. On-State Voltage Drop	1.2 Vrms	1.2 V	at max. load current
Maximum Operate Time		1 ms		
Maximum Release Time		1/2 cycle + 1ms	1 ms	
Insulation Resistance		Minimum 1,000 M Ω (at 500 VDC)		for input-output
Dielectric Strength		2,500 Vrms 1 minute		
Operating Temperature Range		-30°C to + 85°C		
Storage Temperature Range		-40°C to +100°C		
Case Color		Black	Red	
Weight		Approximately 3.5 g	Approximately 2.9 g	

• OUTPUT MODULE High Speed Switching Type


Item		AC Output module	Remarks
INPUT side	Nominal Voltage (DC)	5 V, 12 V, 24 V	
	Operate Voltage Range	±20% of nominal voltage	
	Must Operate Voltage	80% of nominal voltage	
	Must Release Voltage	Minimum 1 V	
Input Impedance	5 VDC Type	330Ω ±10%	
	12 VDC Type	1,0 k Ω ±10%	
	24 VDC Type	2,2 k Ω ±10%	
OUTPUT side	Load Voltage	DC3 to 30V	
	Maximum Load Current	1.0 A	see CHARACTERISTIC DATA
	Minimum Load Current	1 mA	
	Inrush Current	3 A (10 ms)	
	Max. Off-State Leakage Current	0.1 mA (at 300 DC)	
	Max. On-State Voltage Drop	1.2 V	at max. load current
Maximum Operate Time		5 μs	at DC 5 V 0.1A
Maximum Release Time		25 μs	
Insulation Resistance		Minimum 1,000 M Ω (at 500 VDC)	for input-output
Dielectric Strength		2,500 V rms 1 minute	
Operating Temperature Range		-40°C to + 100°C	
Storage Temperature Range		-30°C to + 85°C	
Case Color		Red	
Weight		Approximately 3.0 g	

■ BLOCK DIAGRAM

• INPUT MODULE

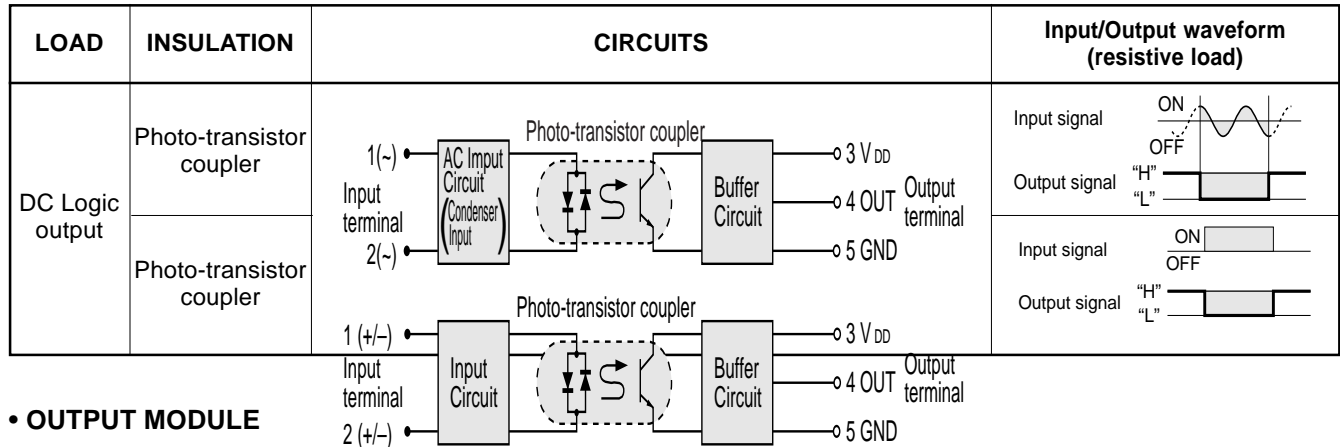


• OUTPUT MODULE

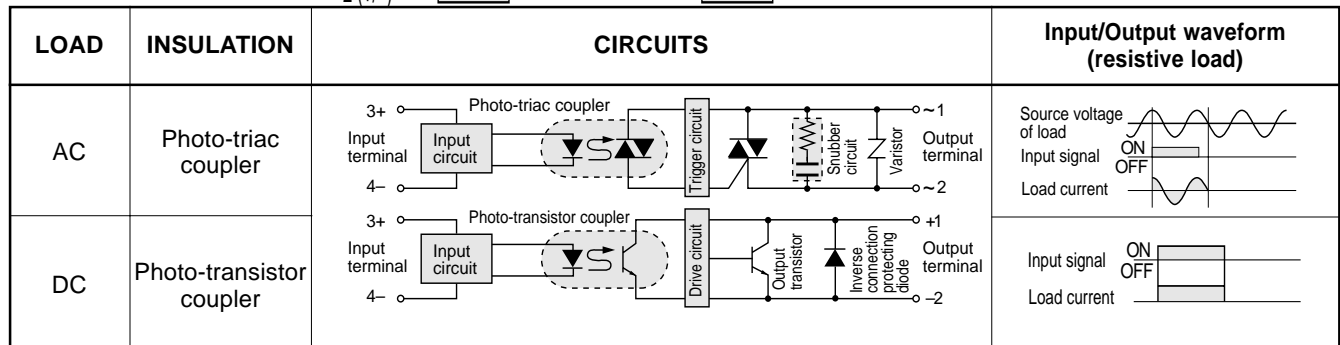

■ CHARACTERISTIC DATA


• OUTPUT MODULE

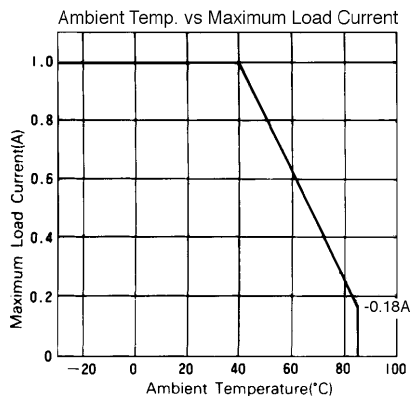


■ REFERENCE DATA

● INPUT MODULE


Distribution of Operate & Release Voltage
(AC Type)

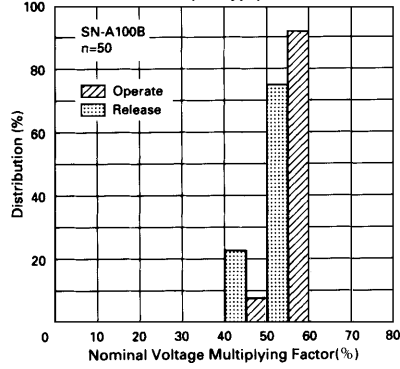

High temperature Switching Test
(AC Type)

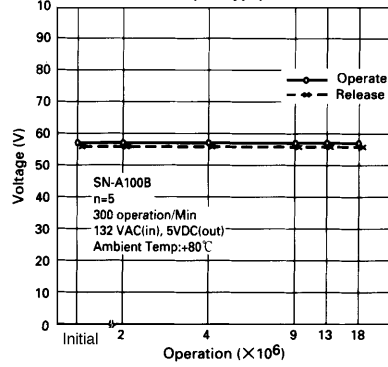


High temperature Continuous Operating Test
(AC Type)

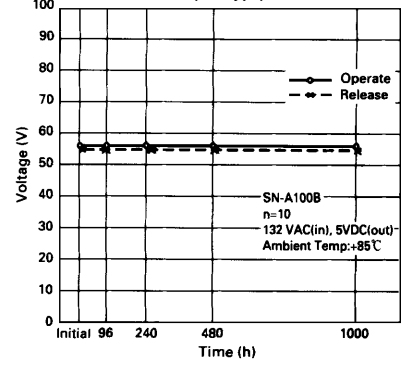


● OUTPUT MODULE


Distribution of Operate & Release Voltage
(AC Type)

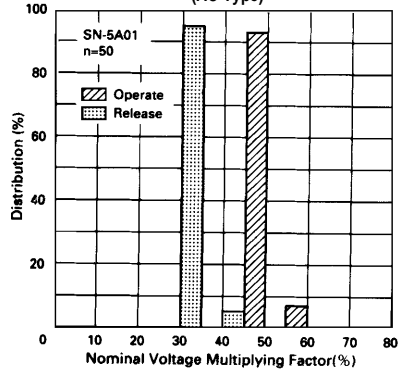


Distribution of Operate & Release Voltage
(DC Type)

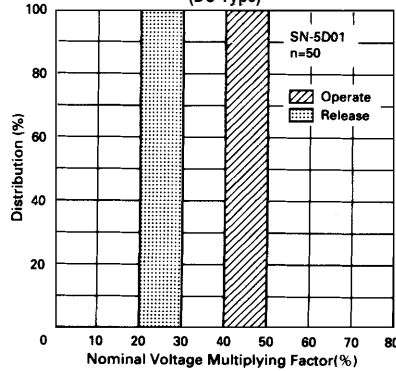


Distribution of On-State Voltage Drop
(AC Type)

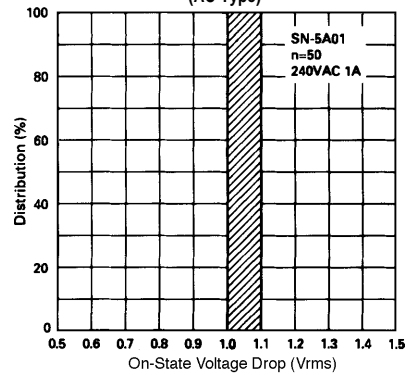


Distribution of On-State Voltage Drop
(DC Type)

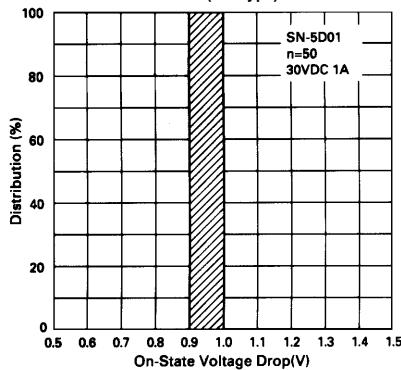

Distribution of On-State Leakage Current
(AC Type)

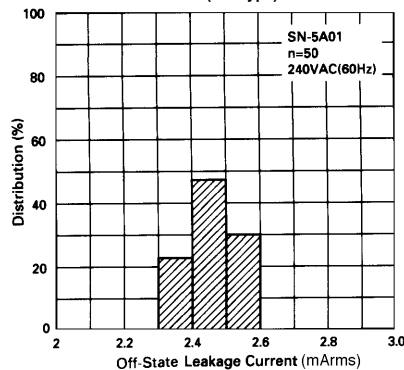


Distribution of On-State Leakage Current
(DC Type)

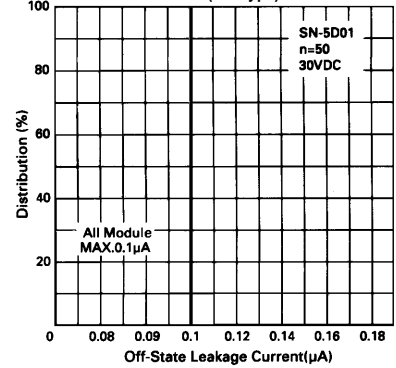


■ DIMENSIONS

● Dimensions


SN-A () type (input module)

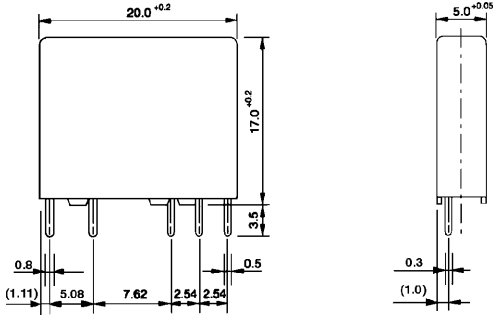

SN-D () type (input module)

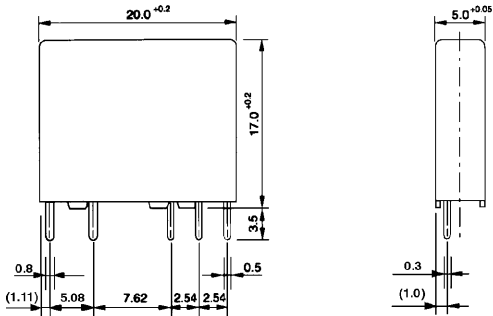


SN-A () type (output module)

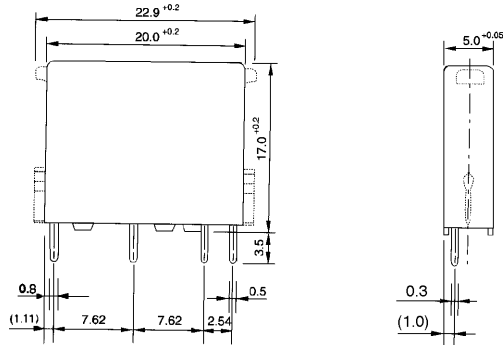

Dotted line : Socket mounting SN-()A-S type





SN-D () type (output module)

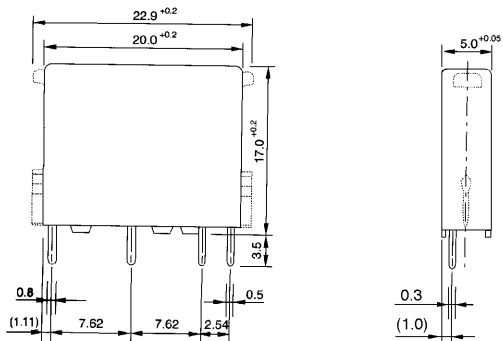




Dotted line : Socket mounting SN-()D-S type

Unit: mm


● Schematics (BOTTOM VIEW)




● PC board mounting hole layout (BOTTOM VIEW)

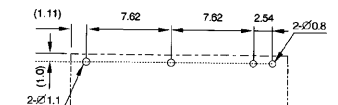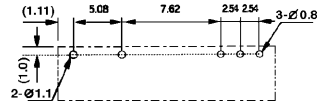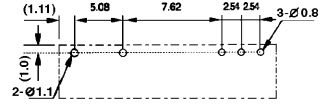

■ Socket Dimensions

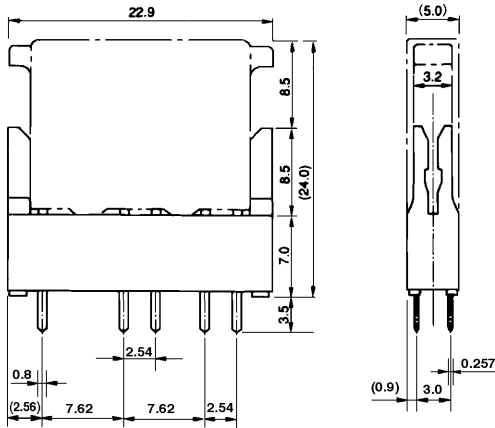

■ Socket PC board mounting hole layout (BOTTOM VIEW)

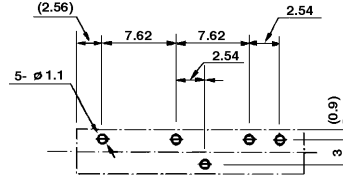

Unit: mm

■ NOTES

1. Polarity of terminals is pre-determined. Please design your circuit accordingly.
2. Socket ordering code: JL-5N
3. Standard IC socket is not recommended. Please use socket "JL-5N".

Fujitsu Takamisawa International Headquarter Offices

www.fujitsu.takamisawa.com

Japan

Fujitsu Takamisawa Component Limited
Global Marketing and Sales
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626

North and South America

Fujitsu Takamisawa America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970

Europe

Fujitsu Takamisawa Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950

Asia Pacific

Fujitsu Takamisawa Asia Pacific Pte. Ltd.
102E Pasir Panjang Road
#04-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 375-8560
Fax: (65) 273-3021